


BTE

BETTER HOLDING

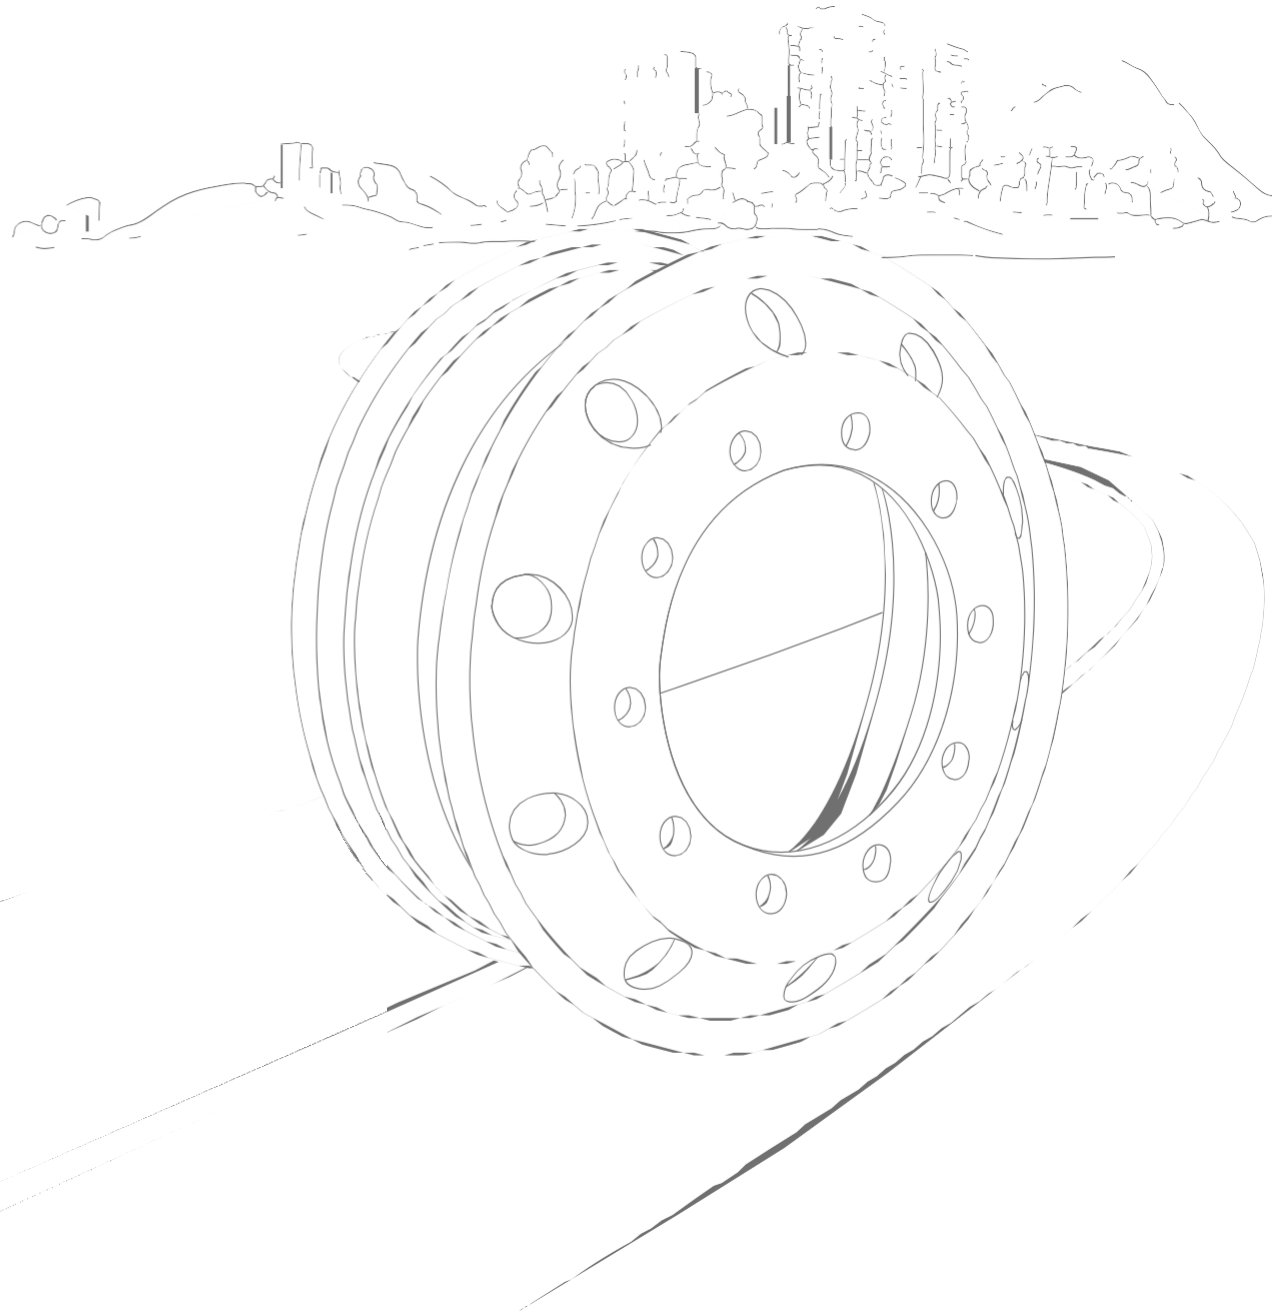

CONTENTS

- 01 / COMPANY PROFILE
- 02 / HONOR AND QUALIFICATION
- 03 / RESARCH TEAM
- 04 / THE PRODUCTION TEAM
- 05 / SERVICE TEAM
- 06 / ADVANCED PRODUCTION TECHNOLOGY
- 07 / ADVANCED PRODUCTION EQUIPMENT
- 08 / THE MAIN PRODUCT INTRODUCTION

BETTER'S FACTORY MAP



ADVANCED PRODUCTION EQUIPMENT

BRTTR HOLDING GROUP



ALUMINUM BAR TEST



ALUMINUM BAR TEST



CUTTING



CUTTING



PREHEATING



PREHEATING

ADVANCED PRODUCTION TECHNOLOGY

BRTTR HOLDING GROUP



FORGING



FORGING



SPINNING TENSILE



SPINNING TENSILE



POLISHING



PUNCHING



HEAT TREATMENT



Products Testing



RFT TEST MACHINE



CFT TEST MACHINE



Impact test machine

All forged alloy wheels will be tested strictly in the factory to ensure delivery to the customer every forged aluminum wheels achieving optimal product quality.

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP



THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP



THE MIAN PRODUCT INTRODUCTION

BRTTR HOLDING GROUP



THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Forged Aluminum Wheels											
Wheel Size inch	Inside Offset mm	Outside Offset mm	Disc Thickness mm	Maximum Loading kg	Bolt Qty	Center Hole mm	P.C.D mm	Vent Hole Dia.	Valve	Weight (KG)	Bolt Diameter Available mm
17.5*6.0	116.6	135.6	19	1750	6	φ165	222.25	φ50	TR544D	12.8	φ21 φ21.5 φ24.5 φ26 φ26.75 φ30 φ32 φ32R22 φ32.5 φ32.5R22
						164	222.25			13	
						φ140	φ190			13.2	
	2500	10		176	225	12.5					
	114	133		1750	6	φ161	φ205			13.2	
				2500	10	φ174	φ222.25			13.7	
φ176			φ225			13.2					
17.5*6.75	120	141	19	1820	6	φ164	φ222.25	φ50	TR544D	14.4	φ21 φ21.5 φ24.5 φ26 φ26.75 φ30 φ32 φ32R22 φ32.5 φ32.5R22
						φ165	222.25			14.1	
						φ202	φ245			13.9	
				2550	8	φ221	φ275			13.5	
				3000	10	φ176	φ225			13.8	
19.5*6.75	120	140	20	2750	8	φ164	φ222.25	φ50	70MS-07/ V3-20-1AA	17.6	φ24.5 φ26 φ26.75 φ32 φ32R22 φ32.5 φ32.5R22
						φ221	φ275			16.7	
							φ285			16.8	

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Wheel Size inch	Inside Offset mm	Outside Offset mm	Disc Thickness mm	Maximum Loading kg	Bolt Qty	Center Hole mm	P.C.D mm	Vent Hole Dia.	Valve	Weight (KG)	Bolt Diameter Available mm
19.5*7.5	135	155	20	3000	10	φ176	φ225	φ61	70MS-07/ V3-20-1AA	12.8	φ24.5 φ26 φ26.75 φ32 φ32R22 φ32.5 φ32.5R22
						φ220.1	φ285.75			13	
						φ221	φ275			13.2	
					8	φ164	φ222.25			13.2	
						φ221	φ275			13.7	
22.5*7.5	136	159	23	3550	10	φ281.2	φ335	φ61	70MS-07	23.6	φ24.5 φ26 φ26.75 φ32 φ32R22 φ32.5 φ32.5R22
						φ220	φ285.75			25	
				3450	8	φ221	φ275 φ285			25.6	
22.5*8.25	145	168	23	3650	10	φ281.2	φ335	φ61	70MS-07/ V3.20.1AA/ TR545D	25.2	φ26 φ26R18 φ26.75 φ32 φ32.5 φ32.5R22
		167.5	22.5			220	285.75			V3.20.1AA/ TR545D	
		168	23			φ220	φ285.75		φ62		
	23.5		281.2			335					
	144.5	168.5	3835			24	10	φ281.2	φ335	φ61	

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Wheel Size inch	Inside Offset mm	Outside Offset mm	Disc Thickness mm	Maximum Loading kg	Bolt Qty	Center Hole mm	P.C.D mm	Vent Hole Dia.	Valve	Weight (KG)	Bolt Diameter Available mm
22.5*9.0	150	176	24	4125	10	φ281.2	φ335	φ61	70MS-07	26.1	φ26 φ26.75 φ32 φ32.5 φ32.5R22
						φ220	φ285.75			27.7	
						φ221				27.6	
						φ222				27.4	
				3356	8	φ221	φ275			27.6	
	151.75	176.75	25	4700	10	φ281.2	φ335	φ45	V3.20.1AA	26.6	
	79	103	24	4125	10	φ281.2	φ335	φ40	40MS-00	22.2	
						φ220	φ285.75			23.5	
						169	222.25			25	

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Wheel Size inch	Inside Offset mm	Outside Offset mm	Disc Thickness mm	Maximum Loading kg	Bolt Qty	Center Hole mm	P.C.D mm	Vent Hole Dia.	Valve	Weight (KG)	Bolt Diameter Available mm
22.5*11.5	0	23	23	4500	10	φ281.2	φ335	φ40	TR543E/40MS-00	23.5	φ26 φ26.75 φ32 φ32.5
						φ220	φ285.75			25	
	120	143.5	23.5	4750		φ220	φ285.75			26.1	
						281.2	335			24.5	
22.5*13	-14	14	28	5300	10	φ220	φ285.75	φ40	TR543E/40MS-00	32.2	φ26 φ26.75 φ32 φ32.5
						φ221				32.1	
						φ281.2				φ335	
22.5*14	22	51	29	5810	10	φ220	φ285.75	Steamed Buns Shape	TR543E/40MS-00	34.7	φ26 φ26.75 φ32 φ32.5
						φ221	φ285.75			34.5	
						φ281.2	φ335			32.9	
24.5*8.25	144	167	23	3650	10	φ220	φ285.75	φ62	TR544D	30.1	φ26 φ26.75 φ32 φ32.5
		166.5				φ221	φ285.75			30.1	
						φ220	φ285.75			φ66	

Big Tubeless Series					
Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
17.5X6.00	135	φ146	φ203.2	5-φ29	8R17.5
17.5X6.00	118	φ146	φ203.2	5-φ29	8R17.5
17.5X6.00	127	φ146	φ203.2	5-φ29	8R17.5
17.5X6.00	128	φ146	φ203.2	5-φ29	8R17.5
17.5X6.00	127	φ161	φ205	6-φ21	8R17.5
17.5X6.00	125	φ161	φ205	6-φ21	8R17.5
17.5X6.00	118	φ161	φ205	6-φ21	8R17.5
17.5X6.00	124	φ161	φ205	6-φ21	8R17.5
17.5X6.00	135	φ164	φ222.25	6-φ32	8R17.5
17.5X6.00	127	φ164	φ222.25	6-φ32	8R17.5
17.5X6.00	118	φ164	φ222.25	6-φ32	8R17.5
17.5X6.00	125	φ164	φ222.25	6-φ32	8R17.5
17.5X6.00	128	φ164	φ222.25	6-φ32	8R17.5
17.5X6.00	125	φ164	φ225	6-φ33	8R17.5
17.5X6.00	125	φ176	φ225	10-φ26	8R17.5
17.5X6.00	135	φ176	φ225	10-φ26	8R17.5
17.5X6.00	123	φ176	φ225	10-φ26	8R17.5
17.5X6.00	120	φ146	φ203.2	5-φ29	8R17.5
17.5X6.00	120	φ150	φ208	5-φ32	8R17.5

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
17.5X6.00	127	φ150	φ208	5-φ32	8R17.5
17.5X6.00	135	φ150	φ208	5-φ32	8R17.5
17.5X6.00	118	φ150	φ208	5-φ32	8R17.5
17.5X6.00	127	φ161	φ222.25	6-φ24	8R17.5
17.5X6.00	127	φ160	φ205	6-φ21	8R17.5
17.5X6.00	118	φ146	φ203.2	5-φ32	8R17.5
17.5X6.00	127	φ146	φ203.2	5-φ32	8R17.5
17.5X6.00	135	φ146	φ203.2	5-φ32	8R17.5
17.5X6.00	134	φ221	φ275	8-φ26	8R17.5
17.5X6.00	135	φ221	φ275	8-φ24	8R17.5
17.5X6.75	138	φ161	φ205	6-φ21	9R17.5
17.5X6.75	132	φ161	φ205	6-φ21	9R17.5
17.5X6.75	127	φ161	φ205	6-φ21	9R17.5
17.5X6.75	127	φ164	φ222.25	6-φ32	9R17.5
17.5X6.75	140	φ164	φ222.25	6-φ32	9R17.5
17.5X6.75	131	φ164	φ222.25	6-φ32	9R17.5
17.5X6.75	137	φ164	φ222.25	6-φ32	9R17.5
17.5X6.75	142	φ176	φ225	10-φ26	9R17.5
17.5X6.75	153	φ176	φ225	10-φ26	9R17.5
17.5X6.75	145	φ176	φ225	10-φ26	9R17.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
17.5X6.75	135	φ176	φ225	10-φ26	9R17.5
17.5X6.75	132	φ221	φ275	8-φ21.5	9R17.5
17.5X6.75	143	φ221	φ275	8-φ26	9R17.5
17.5X6.75	140	φ221	φ275	8-φ26	9R17.5
17.5X6.75	127	φ146	φ203.2	5-φ29	9R17.5
17.5X6.75	138	φ221	φ275	8-φ27	9R17.5
17.5X6.75	142	φ221	φ275	8-φ26	9R17.5
17.5X6.75	150	φ176	φ225	10-φ27	9R17.5
17.5X5.25	126	φ161	φ205	6-φ21	205/75R17.5
17.5X5.25	118	φ146	φ203.2	5-φ29	205/75R17.5
17.5X5.25	127	φ146	φ203.2	5-φ29	205/75R17.5
17.5X5.25	118	φ146	φ203.2	5-φ32	205/75R17.5
17.5X5.25	115	φ150	φ208	5-φ32	205/75R17.5
17.5X5.25	120	φ176	φ225	10-φ26	205/75R17.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
19.5X6.00	135	φ164	φ222.25	6-φ32	8R19.5
19.5X6.00	135	φ221	φ275	8-φ24	8R19.5
19.5X6.75	145	φ164	φ222.25	6-φ32	9R19.5
19.5X6.75	140	φ164	φ222.25	6-φ32	9R19.5
19.5X6.75	145	φ164	φ222.25	6-φ24	9R19.5
19.5X6.75	145	φ221	φ275	8-φ24	9R19.5
19.5X6.75	140	φ221	φ275	8-φ24	9R19.5
19.5X6.75	140	φ221	φ285	8-φ32	9R19.5
19.5X6.75	145	φ221	φ285	8-φ32	9R19.5
19.5X6.75	140	φ214	φ275	8-φ32	9R19.5
19.5X6.75	135	φ214	φ225	8-φ32	9R19.5
19.5X6.75	145	φ176	φ225	10-φ26	9R19.5
19.5X6.75	145	φ221	φ275	8-φ26	9R19.5
19.5X6.75	145	φ221	φ275	8-φ27	9R19.5
19.5X6.75	145	φ176	φ225	10-φ27	9R19.5
19.5X7.50	152	φ221	φ275	8-φ24	10R19.5
19.5X7.50	146	φ221	φ275	8-φ24	10R19.5
19.5X7.50	152	φ221	φ275	8-φ26	10R19.5
19.5X7.50	152	φ164	φ222.25	6-φ32	10R19.5
19.5X7.50	152	φ165	φ222.25	6-φ32	10R19.5
19.5X7.50	152	φ176	φ225	10-φ26	10R19.5
19.5X7.50	155	φ176	φ225	10-φ26	10R19.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
19.5X7.50	156	φ176	φ225	10-φ26	10R19.5
19.5X7.50	146	φ176	φ225	10-φ27	10R19.5
19.5X7.50	151	φ176	φ225	10-φ27	10R19.5
19.5X7.50	150	φ221	φ275	8-φ27	10R19.5
19.5X7.50	145	φ214	φ275	8-φ32	10R19.5
19.5X8.25	165	φ176	φ225	10-φ26	11R19.5
19.5X8.25	160	φ176	φ225	10-φ26	11R19.5
19.5X8.25	146.5	φ176	φ225	10-φ26	11R19.5
19.5X8.25	165	φ221	φ275	8-φ24	11R19.5
19.5X8.25	165	φ221	φ275	8-φ26	11R19.5
19.5X8.25	160	φ221	φ275	8-φ26	11R19.5
19.5X8.25	100	φ151	φ208	5-φ32	11R19.5
19.5X8.25	100	φ164	φ222.25	6-φ32	11R19.5
19.5X8.25	74	φ164	φ222.25	6-φ32	11R19.5
19.5X8.25	10	φ221	φ275	8-φ21.5	11R19.5
19.5X8.25	10	φ161	φ205	6-φ21.5	11R19.5
19.5X14.00	0	φ221	φ275	8-φ26	18R19.5
19.5X14.00	5	φ221	φ275	8-φ26	18R19.5
19.5X14.00	0	φ281	φ335	10-φ26	18R19.5
19.5X14.00	120	φ281	φ335	10-φ26	18R19.5
19.5X14.00	0	φ281	φ335	10-φ27	18R19.5
19.5X14.00	120	φ281	φ335	10-φ27	18R19.5
19.5X14.00	0	φ221	φ275	8-φ21.5	18R19.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x6.75	145	φ221	φ275	8-φ24	9R22.5
22.5X6.75	153	φ221	φ275	8-φ24	9R22.5
22.5X6.75	145	φ221	φ275	8-φ26	9R22.5
22.5X6.75	145	φ221	φ275	8-φ27	9R22.5
22.5X6.75	147	φ214	φ275	8-φ32	9R22.5
22.5X6.75	145	φ214	φ275	8-φ32	9R22.5
22.5X6.75	152	φ214	φ275	8-φ32	9R22.5
22.5X6.75	145	φ221	φ285	8-φ32	9R22.5
22.5X6.75	142	φ221	φ285	8-φ32	9R22.5
22.5X6.75	150	φ221	φ285	8-φ32	9R22.5
22.5X6.75	152	φ221	φ285	8-φ32	9R22.5
22.5X6.75	145	φ220	φ285.75	10-φ26	9R22.5
22.5X6.75	145	φ222	φ285.75	10-φ32	9R22.5
22.5x6.75	145	φ281	φ335	10-φ26	9R22.5
22.5x6.75	153	φ281	φ335	10-φ26	9R22.5
22.5x6.75	145	φ281	φ335	10-φ27	9R22.5
22.5x6.75	145	φ281	φ225	10-φ26	9R22.5
22.5X7.50	153	φ221	φ275	8-φ24	10R22.5
22.5X7.50	165	φ221	φ275	8-φ24	10R22.5
22.5X7.50	160	φ221	φ275	8-φ24	10R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x7.50	153	φ214	φ275	8-φ32	10R22.5
22.5X7.50	140	φ214	φ275	8-φ32	10R22.5
22.5X7.50	145	φ214	φ275	8-φ32	10R22.5
22.5X7.50	165	φ214	φ275	8-φ32	10R22.5
22.5X7.50	153	φ221	φ285	8-φ32	10R22.5
22.5X7.50	165	φ221	φ285	8-φ32	10R22.5
22.5X7.50	162	φ221	φ285	8-φ32	10R22.5
22.5X7.50	153	φ220	φ285.75	10-φ26	10R22.5
22.5X7.50	152	φ221	φ285.75	10-φ26	10R22.5
22.5X7.50	165	φ220	φ285.75	10-φ26	10R22.5
22.5X7.50	153	φ222	φ285.75	10-φ32	10R22.5
22.5X7.50	165	φ222	φ285.75	10-φ32	10R22.5
22.5X7.50	153	φ281	φ335	10-φ26	10R22.5
22.5x7.50	162	φ281	φ335	10-φ26	10R22.5
22.5x7.50	160	φ281	φ335	10-φ26	10R22.5
22.5x7.50	153	φ281	φ335	10-φ27	10R22.5
22.5x7.50	165	φ221	φ275	8-φ26	10R22.5
22.5X7.50	153	φ221	φ275	8-φ26	10R22.5
22.5X7.50	153	φ221	φ275	8-φ26	10R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x7.50	158	φ221	φ275	8-φ27	10R22.5
22.5X7.50	165	φ281	φ335	10-φ26	10R22.5
22.5X7.50	165	φ281	φ335	10-φ27	10R22.5
22.5X8.25	169	φ221	φ275	8-φ24	11R22.5
22.5X8.25	165	φ221	φ275	8-φ24	11R22.5
22.5X8.25	160	φ221	φ275	8-φ24	11R22.5
22.5X8.25	169	φ221	φ275	8-φ27	11R22.5
22.5X8.25	160	φ214	φ275	8-φ32	11R22.5
22.5X8.25	169	φ214	φ275	8-φ32	11R22.5
22.5X8.25	169	φ221	φ285	8-φ32	11R22.5
22.5X8.25	165	φ221	φ285	8-φ32	11R22.5
22.5X8.25	150	φ221	φ285	8-φ32	11R22.5
22.5X8.25	169	φ220	φ285.75	10-φ26	11R22.5
22.5x8.25	168	φ220	φ285.75	10-φ26	11R22.5
22.5x8.25	165	φ220	φ285.75	10-φ26	11R22.5
22.5x8.25	168	φ221	φ285.75	10-φ26	11R22.5
22.5x8.25	169	φ222	φ285.75	10-φ32	11R22.5
22.5X8.25	160	φ222	φ285.75	10-φ32	11R22.5
22.5X8.25	165	φ222	φ285.75	10-φ32	11R22.5
22.5X8.25	168	φ222	φ285.75	10-φ32	11R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x8.25	168	φ221	φ285.75	10-φ32	11R22.5
22.5X8.25	158	φ222	φ285.75	10-φ32	11R22.5
22.5X8.25	170	φ281	φ335	10-φ26	11R22.5
22.5X8.25	171	φ281	φ335	10-φ26	11R22.5
22.5X8.25	165	φ281	φ335	10-φ26	11R22.5
22.5X8.25	169	φ281	φ335	10-φ26	11R22.5
22.5X8.25	169	φ281	φ335	10-φ27	11R22.5
22.5X8.25	165	φ281	φ335	10-φ27	11R22.5
22.5X8.25	171	φ220	φ285.75	10-φ26	11R22.5
22.5X8.25	171	φ222	φ285.75	10-φ32	11R22.5
22.5X8.25	171	φ220	φ285.75	10-φ32	11R22.5
22.5X8.25	168	φ281	φ335	10-φ26	11R22.5
22.5X8.25	168	φ281	φ335	10-φ27	11R22.5
22.5x8.25	169	φ221	φ275	8-φ26	11R22.5
22.5x8.25	165	φ221	φ275	8-φ26	11R22.5
22.5x8.25	160	φ221	φ275	8-φ26.5	11R22.5
22.5x8.25	162	φ281	φ335	10-φ26	11R22.5
22.5X8.25	38	φ152.4	φ203.2	8-φ16.5	11R22.5
22.5X8.25	28.5	φ117.7	φ152.4	6-φ14.7	11R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x9.00	175	φ221	φ275	8-φ24	12R22.5
22.5X9.00	175	φ214	φ275	8-φ32	12R22.5
22.5X9.00	175	φ221	φ285	8-φ32	12R22.5
22.5X9.00	150	φ221	φ285	8-φ32	12R22.5
22.5X9.00	160	φ221	φ285	8-φ32	12R22.5
22.5X9.00	175	φ221	φ285.75	10-φ26	12R22.5
22.5X9.00	175	φ220	φ285.75	10-φ26	12R22.5
22.5X9.00	175	φ222	φ285.75	10-φ32	12R22.5
22.5X9.00	177	φ222	φ285.75	10-φ32	12R22.5
22.5X9.00	158	φ222	φ285.75	10-φ32	12R22.5
22.5X9.00	175	φ281.1	φ335	10-φ26	12R22.5
22.5X9.00	172	φ281	φ335	10-φ26	12R22.5
22.5X9.00	170	φ281	φ335	10-φ26	12R22.5
22.5x9.00	168	φ281	φ335	10-φ26	12R22.5
22.5x9.00	169	φ281	φ335	10-φ26	12R22.5
22.5x9.00	150	φ281	φ335	10-φ27	12R22.5
22.5x9.00	180	φ281	φ335	10-φ27	12R22.5
22.5X9.00	180	φ281	φ335	10-φ27	12R22.5
22.5X9.00	175	φ281	φ335	10-φ26	12R22.5
22.5X9.00	175	φ281	φ335	10-φ27	12R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x9.00	0	φ281	φ335	10-φ26	12R22.5
22.5X9.00	125	φ281	φ335	10-φ26	12R22.5
22.5X9.00	104	φ281	φ335	10-φ26	12R22.5
22.5X9.00	30	φ281	φ335	10-φ26	12R22.5
22.5X9.00	180	φ281	φ335	10-φ26	12R22.5
22.5X9.00	0	φ222	φ275	8-φ21.5	12R22.5
22.5X9.00	0	φ281	φ335	10-φ27	12R22.5
22.5X9.00	0	φ221	φ275	8-φ26	12R22.5
22.5X9.00	125	φ281	φ335	10-φ27	12R22.5
22.5X9.75	185	φ281	φ335	10-φ26	13R22.5
22.5X9.75	125	φ281	φ335	10-φ26	13R22.5
22.5X9.75	175	φ281	φ335	10-φ26	13R22.5
22.5X9.75	180	φ281	φ335	10-φ26	13R22.5
22.5x9.75	180	φ220	φ285.75	10-φ26	13R22.5
22.5x9.75	80	φ221	φ275	8-φ26	13R22.5
22.5x11.75	0	φ281	φ335	10-φ26	385/65R22.5
22.5x11.75	135	φ281	φ335	10-φ27	385/65R22.5
22.5X11.75	130	φ281	φ335	10-φ27	385/65R22.5
22.5X11.75	120	φ281	φ335	10-φ27	385/65R22.5
22.5X11.75	0	φ281	φ335	10-φ27	385/65R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x13.00	75	φ281	φ335	10-φ26	425/65R22.5
22.5x13.00	0	φ281	φ335	10-φ26	425/65R22.5
22.5x13.00	120	φ281	φ335	10-φ26	425/65R22.5
22.5x13.00	12	φ281	φ335	10-φ26	425/65R22.5
22.5x13.00	0	φ281	φ335	10-φ27	425/65R22.5
22.5x13.00	8	φ152.7	φ203.2	8-φ20.6	425/65R22.5
22.5x13.00	0	φ223.2	φ285.75	10-φ20.6	425/65R22.5
22.5x14.00	0	φ281	φ335	10-φ26	445/65R22.5
22.5x14.00	120	φ281	φ335	10-φ26	445/65R22.5
22.5x14.00	0	φ281	φ335	10-φ27	445/65R22.5
22.5x14.00	120	φ281	φ335	10-φ27	445/65R22.5
22.5x14.00	0	φ221	φ275	8-φ26	445/65R22.5
22.5x14.00	180	φ281	φ335	10-φ27	445/65R22.5
22.5x14.00	0	φ221	φ275	8-φ21.5	445/65R22.5

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
22.5x7.50	7	110	31.5	America type	10R22.5
22.5x7.50	6	110		America type	10R22.5
22.5x7.50	7	115	31.5	America type	10R22.5
22.5x8.25	7	116	33.92	Euro type	11R22.5
22.5x8.25	7	120	34.52	Austrilia type	11R22.5
22.5x8.25	7	120	33.72	America type	11R22.5
22.5x8.25	6	120	31	America type	11R22.5
22.5x9.00	7	116	35.6	Euro type	12R22.5
22.5x9.00	7	130	36.2	America type	12R22.5
22.5x9.00	6	130		America type	12R22.5
24.5x9.00	7	127	45.42	Paraguay type	12R24.5

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
24.5x8.25	169	φ281	φ335	10-φ26	11R24.5
24.5x8.25	169	φ281	φ335	10-φ27	11R24.5
24.5x8.25	169	φ222	φ285.75	10-φ32	11R24.5
24.5x8.25	168	φ222	φ285.75	10-φ32	11R24.5
24.5x8.25	169	φ221	φ285.75	10-φ32	11R24.5
24.5x9.00	175	φ281	φ335	10-φ26	12R24.5
24.5x9.00	175	φ281	φ335	10-φ27	12R24.5
24.5x8.25	168	φ220	φ285.75	10-φ26	11R24.5

Small Tubeless Series					
Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
13x4.5J	98	φ115	φ160	6-φ15	
13x5J	45	φ110	φ139.7	5-φ15	
14x4.5J	98	φ115	φ160	6-φ15	6.00-14
14x4.5J	98	φ110	φ160	6-φ15	6.00-14
14x4.5J	99	φ110	φ160	6-φ17	
5.5Jx16	115	φ140	φ190	6-φ21	7.00R16
5.5Jx16	108	φ140	φ190	6-φ21	195/75R16
5.5Jx16	115	φ164	φ222.25	6-φ32	7.00R16
5.5Jx16	127	φ164	φ222.25	6-φ32	7.00R16
5.5Jx16	127	φ165	φ222.25	6-φ32	7.00R16
5.5Jx16	116	φ164	φ222.25	6-φ32	205/75R16
5.5Jx16	123	φ164	φ222.25	6-φ32	215/80R16
5.5Jx16	122	φ164	φ222.25	6-φ32	7.00R16
5.5Jx16	127	φ146	φ203.2	5-φ29	7.00R16
5.5Jx16	119	φ150	φ208	5-φ32	7.00R16

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
5.5Jx16	116	φ150	φ208	5-φ32	7.00R16
5.5Jx16	127	φ164	φ222.25	6-φ24	7.00R16
5.5Jx16	106	φ130	φ170	6-φ21	
5.5Jx16	127	φ146	φ203.2	5-φ32	215/75R16
5.5Jx16	127	φ146	φ203.2	5-φ29	
5.5Jx16	119	φ146	φ203.2	5-φ29	
5.5Jx16	118	φ146	φ203.2	5-φ29	
5.5Jx16	127	φ165	φ222.25	6-φ32	
5.5Jx16	127	φ161	φ205	6-φ21	215/75R16
5.5Jx16	105	φ130	φ170	6-φ21	
5.5Jx16	115	φ140	φ190	6-φ21	
6Jx15	15	φ110	φ140	5-φ15	
6Jx15	115	φ140	φ190	6-φ20	195/70R15
6Jx16	125	φ165	φ222.25	6-φ32	225/80R16
6Jx16	127	φ150	φ208	5-φ32	225/80R16

Tube Series					
Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
5.5F-16	108	φ140	φ190	6-φ20.5	7.00-16
5.5F-16	115	φ146	φ203.2	5-φ29	7.00-16
5.5F-16	118	φ146	φ203.2	5-φ29	7.00-16
5.5F-16	129	φ161	φ222.25	6-φ26	7.00-16
7.50V-20	165	φ281	φ335	10-φ26	10.00-20
7.50V-20	165	φ222	φ285.75	10-φ32	10.00-20
8.00V-20	175	φ281	φ335	10-φ26	11.00-20
8.00V-20	172	φ281	φ335	10-φ26	11.00-20
8.00V-20	170	φ281	φ335	10-φ26	11.00-20
8.00V-20	175	φ222	φ285.75	10-φ32	11.00-20
8.00V-20	175	φ281	φ335	10-φ27	11.00-20
8.00V-20	170	φ281	φ335	10-φ27	11.00-20

Agriculture , forestry and engineering machinery series					
Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)	Tire
8.5-20	175	φ281	φ335	10-φ26	12.00-20
8.5-20	180	φ281	φ335	10-φ26	12.00-20
8.5-20	177	φ281	φ335	10-φ26	12.00-20
8.5-20	183	φ281	φ335	10-φ26	12.00-20
8.5-20	180	φ281	φ335	10-φ27	12.00-20
8.8-20	180	φ281	φ335	10-φ26	12.00-20
8.8-20	183	φ281	φ335	10-φ26	12.00-20
8.5-24	177	φ281	φ335	10-φ26	12.00-24
8.5-24	172	φ281	φ335	10-φ26	12.00-24
8.5-24	180	φ281	φ335	10-φ26	12.00-24
8.5-24	175	φ281	φ335	10-φ26	12.00-24
8.5-24	180	φ281	φ335	10-φ27	12.00-24

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
3.00Dx14	0	φ110	φ140	5-φ15
3.00Dx14	10.5	φ110	φ140	5-φ15
3.00Dx14	20	φ74	φ110	4-φ15
3.00Dx16	12	φ110	φ140	5-φ15
3.00Dx16	28	φ74	φ110	4-φ15
3.00Dx16	28	φ110	φ140	5-φ15
4.5Jx14	8	φ110	φ139.7	5-φ15
4.5Jx14	15	φ110	φ139.7	5-φ15
4.5Jx14	12	φ110	φ139.7	5-φ15
4.5Jx14	0	φ110	φ139.7	5-φ15
4.00Ex15	0	φ92	φ127	4-φ15
4.00Ex15	15	φ110	φ152	4-φ20
4.00Ex15	25	φ110	φ152	4-φ20
4.00Ex15	10	φ92.2	φ127	4-φ17
4.00Ex15	15	φ110	φ139.7	5-φ15
15.3X9.00	0	φ158	φ205	5-φ17
4.00Ex16	0	φ110	φ140	5-φ15
4.00Ex16	10	φ110	φ140	5-φ15
4.00Ex16	12	φ110	φ140	5-φ15
4.00Ex16	25	φ110	φ152	4-φ20

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
4.00Ex16	12	φ110	φ152	4-φ20
4.50Ex16	15	φ140.4	φ190	6-φ20
4.50Ex16	58	φ96	φ140	5-φ15
4.50Ex16	50	φ96	φ140	5-φ15
4.50Ex16	30	φ140	φ190	6-φ15
4.50Ex16	30	φ110	φ140	6-φ12
4.50Ex16	21	φ110	φ152.4	4-φ20
4.50Ex16	52	φ102	φ161	6-φ19
4.50Ex16	15	φ102	φ161	6-φ19
4.50Ex16	0	φ110	φ140	6-φ13
4.50Ex16	21	φ96	φ140	5-φ15
4.50Ex16	16	φ96	φ140	5-φ15
4.50Ex16	15	φ110	φ139.7	5-φ15
4.50Ex16	16	φ112.5	φ152.4	6-φ20
8LBx16	0	φ161	φ205	6-φ21
8LBx16	0	φ140	φ190	6-φ20
5.00Fx16	80	φ110	φ152.4	6-φ20
5.00Fx16	80	φ110	φ140	5-φ15
5.00Fx16	25	φ110	φ152.4	6-φ20
5.00Fx16	60	φ96	φ140	5-φ15

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
5.5Fx16	0	φ140	φ190	6-φ15
5.5Fx16	25	φ141	φ180	6-φ17
5.5Fx16	50	φ96	φ140	5-φ15
5.5Fx16	50	φ102	φ161	6-φ19
5.5Fx16	12	φ110	φ139.7	5-φ15
8LBx16	0	φ110	φ139.7	5-φ15
W7x20	28	φ141	φ180	6-φ17
W7x20	48	φ141	φ180	6-φ17
W7x20	50	φ102	φ161	6-φ19
W7x24	28	φ141	φ180	6-φ17
W7x24	53.5	φ141	φ180	6-φ17
W7x24	15	φ141	φ180	6-φ17
W7x24	48	φ141	φ180	6-φ17
W7x24	76	φ141	φ180	6-φ17
W8x24	39	φ141	φ180	6-φ17
W8x24	25	φ141	φ180	6-φ17
W8x24	25	φ141	φ180	6-φ17
W8x24	84	φ141	φ180	6-φ17
W8x24	18	φ141	φ180	6-φ17
W8x24	30	φ141	φ180	6-φ17

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
W8x24	15	φ120	φ165	6-φ20
W8x24	65	φ120	φ165	6-φ20
W8x24	45	φ141	φ180	6-φ17
W8x24	10	φ130	φ165	6-φ15
W9x24	30	φ141	φ180	6-φ17
W9x24	76	φ141	φ180	6-φ17
W10x24	22	φ141	φ180	6-φ17
W10x24	18	φ141	φ180	6-φ17
W10x24	15	φ120	φ165	6-φ20
W10x24	65	φ120	φ165	6-φ20
W10x24	69	φ120	φ165	6-φ20
W10x24	50	φ120	φ165	6-φ18.8
W10x24	0	φ120	φ165	6-φ18.8
W10x24	81.5	φ290.5	φ330	8-φ17
W10x24	52	φ141	φ180	6-φ17
W10x24	35	φ152.4	φ203.2	8-φ17
W12x24	7	φ290.5	φ330	8-φ17
W12x24	60	φ290.5	φ330	8-φ17
W12x24	10	φ140	φ210	8-φ21
W12x24	70	φ140	φ210	8-φ21

THE MIAN PRODUCT INTRODUCTION

BRTTER HOLDING GROUP

Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
W12x24	50	φ 140	φ 210	8-φ 21
W11x26	102	φ290.5	φ 330	8-φ16.5
W13x26	5	φ290.5	φ 330	8-φ16.5
W13x26	17.5	φ290.5	φ 330	8-φ16.5
W10x28	69	φ152.6	φ203.2	8-φ18.8
W10x28	48.5	φ152.6	φ203.2	8-φ18.8
W10x28	4	φ152.6	φ203.2	8-φ18.8
W10x28	65	φ 120	φ 165	6-φ18.8
W10x28	4	φ 120	φ 165	6-φ18.8
W10x28	48.5	φ 120	φ 165	6-φ18.8
W10x28	52.5	φ290.5	φ 330	8-φ16.5
W11x28	69	φ152.6	φ203.2	8-φ18.8
Size	Offset (mm)	Center hole (mm)	P.C.D (mm)	Bolt hole (mm)
W12x30	25.4	φ152.4	φ203.2	8-φ 21
W12x30	20	φ152.4	φ203.2	8-φ 21
W15x30	20	φ152.4	φ203.2	8-φ 21
W15x34	70	φ 150	φ203.2	8-φ18.8
W15x34	12	φ152.4	φ203.2	8-φ 21
W15x34	45	φ220.5	φ 280	8-φ 23
W15x34	55	φ220.5	φ 280	8-φ 23
W15x34	50	φ220.5	φ 280	8-φ 23
W12x38	112	φ 150	φ203.2	8-φ18.8
W12x38	12	φ152.4	φ203.2	8-φ 21
W15x38	119	φ 150	φ203.2	8-φ18.8