

 FIREMAX



GROUP BRIEF INTRODUCTION



Qingdao Sunfulcess Tyre Co.,Ltd was established in 2015 as the sole international tyre export department of Sunfulcess Group, which is wholly owned and run by Sunfulcess Group; here in Qingdao, a dedicated team of highly qualified professionals is committed to delivering the FIREMAX and KPATOS tyres to the world.

Sunfulcess Group is located in the beautiful Shandong Peninsula, since established in 1994, up to now Sunfulcess Group has been widely recognized as a remarkable and modern global tyre manufacturer with quality, credibility and creativity in line with Sunfulcess' ambitious objective to provide products that are well respected within the tyre industry, its business scope also involves rubber and plastics machinery, wheels & rims, chemical products. The total assets exceed RMB 4 billion with an annual output of 12 million PCR and 1.2 million TBR tyres.

During the past decades Sunfulcess Group has stood out as a leader in the tyre fields, specializing in designing and manufacturing a wide variety of tyres, PCR, UHP, SUV/4WD, Commercial Van & LTR, TBR tyres as well as agricultural tyres under the brands: FIREMAX and KPATOS. Sunfulcess Group has acquired the global leading certifications ISO9001/TS16949, CCC, DOT and SMARTWAY, ECE, EU LABELING and REACH, SONCAP, GCC, NOM, INMETRO to guarantee the superior quality.

With the large size portfolio, high quality and competitive pricing, exclusive agreement, prompt delivery, excellent customer service and after sales support, Sunfulcess tyres are winning new markets every day, up to now shipments have been exported to more than 100 countries covering North America, South and Middle America, Europe, Africa, Australia, South and East Asia, and the Middle East.

For the future we are aiming to continue working towards expanding new markets and introducing the leading technologies, additional sizes, patterns and ranges to keep pace and be at the very forefront of anticipated demands in the tyre industry. Quality first, technology advanced, win-win are our sincere faith, let's work together hand by hand to strive for a bright future. SUNFULCESS---More than your expectation.



Semi Steel Products Catalog

PGR/UHP



FM601

3 Main Grooves

02



FM601

4 Main Grooves

03



FM316

05



FM318

08



FM319

10



FM393

11



FM602

13

SUV/4X4



FM515

14



FM517

15



FM518

16



FM519

17



FM501

18



FM502

20



FM523

21

LTR/ST



FM913

23



FM915

24



FM916

25



S369

26



FM700

27



FM701

28

SNOW



FM805

29



FM806

31



ABBREVIATIONS:

P.R.	Ply Rating
L.I./S.R.	Load Index / Speed Rating
S.W.	Section Width (mm)
O.D.	Overall Diameter (mm)
T.D.	Tread Depth (mm)
L.C.C.	Load Carrying Capacity (kg)
R.W.	Rim Width (inch)
STD.INFL	Standard Inflation Pressure (kPa)
UTQG	Uniform Tyre Quality Grading
R.R.	Rolling Resistance
W.G.	Wet Grip
NOISE	Noise Rating (decibels)
O.W.L.	Outlined White Letter
R.W.W.	Raised White Wall
R.W.L.	Raised White Letter
R.P.	Rim Protector



FM601

3 Main Grooves



Features & Benefits

- 3 wide grooves and asymmetric tread design improve wet performance and resist hydroplaning
- High stiffness center rib enhances handling performance, driving stability during high-speed driving
- Increased shoulder block stiffness and pressure distribution deliver maximum grip during high-speed cornering
- Groove designed for optima hydro performance from the rib contact surface through to inter zone main groove

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	UTQG	E-MARK	RR	WG	NOISE
13 Inch	155/70R13	75T	7.2	4.5	548	157	387	300	360 AA	E	E	B	69))
	165/65R13	77H	7.5	5.0	544	170	412	300	360 AA	E	E	B	69))
	165/70R13	79T	7.2	5.0	562	170	437	300	360 AA	E	E	B	69))
	175/70R13	82T	7.2	5.0	576	177	475	300	360 AA	E	E	B	69))
14 Inch	155/65R14	75T	7.2	4.5	558	157	387	300	360 AA	E	E	B	69))
	165/60R14	75H	7.5	5.0	554	170	387	300	400 AA	E	E	B	69))
	165/65R14	79T	7.5	5.0	570	170	437	300	400 AA	E	E	B	69))
	165/70R14	81T	7.2	5.0	588	170	462	300	360 AA	E	E	B	69))
	175/65R14	82T	7.5	5.0	584	177	475	300	400 AA	E	E	B	69))
	175/65R14	82H	7.5	5.0	584	177	475	300	400 AA	E	E	B	69))
	175/70R14	84H	7.2	5.0	602	177	500	300	360 AA	E	C	B	69))
15 Inch	185/60R14	82H	7.5	5.5	578	189	475	300	400 AA	E	E	B	69))
	185/65R14	86H	7.5	5.5	596	189	530	300	400 AA	E	C	B	69))
	175/60R15	81H	7.5	5.0	591	177	462	300	360 AA	E	E	B	69))
	175/65R15	84H	7.5	5.0	609	177	500	300	360 AA	E	C	B	69))
	185/55R15	82V	7.5	6.0	585	194	475	300	400 AA	E	E	B	69))
	185/60R15	84H	7.5	5.5	603	189	560	300	400 AA	E	C	B	69))
	185/60R15	88H XL	7.5	5.5	603	189	560	300	400 AA	E	C	B	69))
	185/65R15	88T	7.5	5.5	621	189	560	300	400 AA	E	C	B	69))
	185/65R15	88H	7.5	5.5	621	189	560	300	400 AA	E	C	B	69))

FM601 4 Main Grooves



Features & Benefits

- Wide grooves and asymmetric tread design improve wet performance and reduce hydroplaning
- High stiffness center ribs enhance handling performance, driving stability during high-speed driving
- Optimum surface split siping is applied for 3D block design and enhanced wet/dry traction performance
- Rigid shoulder block design and uniform contact pressure deliver maximum cornering and handling stability

INCH	SIZE	L.I. / S.R	T.D. mm	R.W Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	UTQG	E-MARK	RR	WG	NOISE
15 Inch	195/50R15	82V	7.8	6.0	577	201	475	300	400 AA	E	E	B	69))
	195/55R15	85V	7.8	6.0	595	201	515	300	400 AA	E	C	B	69))
	195/60R15	88H	7.5	6.0	615	201	560	300	400 AA	E	C	B	69))
	195/60R15	88V	7.5	6.0	615	201	560	300	400 AA	E	C	B	69))
	195/65R15	91H	7.5	6.0	635	201	615	300	400 AA	E	C	B	69))
	195/65R15	91V	7.5	6.0	635	201	615	300	400 AA	E	C	B	69))
	205/60R15	91V	7.8	6.0	627	209	615	300	400 AA	E	C	B	69))
16 Inch	205/55R15	94V	7.8	6.0	647	209	670	300	400 AA	E	C	B	69))
	205/45ZR16 *	87W XL	7.8	7.0	590	206	545	340	320 AA	E	C	B	69))
	205/55R16	91V	7.8	6.5	632	214	615	300	320 AA	E	C	B	69))
	205/55ZR16	91W	7.8	6.5	632	214	615	300	320 AA	E	C	B	69))
	205/60R16	92H	7.8	6.0	652	209	630	300	400 AA	E	C	B	69))
	205/60R16	92V	7.8	6.0	652	209	630	300	400 AA	E	C	B	69))
	215/55ZR16	97W XL	7.8	7.0	642	226	730	340	320 AA	E	C	B	69))
	215/60R16	95V	7.8	6.5	664	221	690	300	400 AA	E	C	B	69))
	215/60R16	99V XL	7.8	6.5	664	221	775	300	400 AA	E	C	B	69))
	225/50R16	92V	7.8	7.0	632	233	630	300	320 AA	E	C	B	69))
	225/50ZR16	96W XL	7.8	7.0	632	233	630	300	320 AA	E	C	B	69))
	225/55ZR16 *	99W XL	7.8	7.0	654	233	775	340	320 AA	E	C	B	69))
	17"	205/40ZR17 *	84W XL	7.8	7.5	596	212	500	340	320 AA	E	C	B

INCH	SIZE	L.I. / S.R	T.D. mm	R.W Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	UTQG	E-MARK	RR	WG	NOISE
17 Inch	205/45ZR17 *	88W XL	7.8	7.0	616	206	560	340	320 AA	E	C	B	69))
	205/50ZR17 *	93W XL	7.8	6.5	638	214	650	340	320 AA	E	C	B	69))
	215/40ZR17 *	87W XL	7.8	7.5	604	218	545	340	320 AA	E	C	B	69))
	215/45ZR17 *	91W XL	7.8	7.0	626	213	615	340	320 AA	E	C	B	69))
	215/50ZR17 *	95W XL	7.8	7.0	648	226	690	340	320 AA	E	C	B	69))
	215/55ZR17 *	98W XL	7.8	7.0	668	226	750	340	320 AA	E	C	B	69))
	225/45ZR17 *	94W XL	7.8	7.5	634	225	670	340	320 AA	E	C	B	69))
	225/50R17 *	94V	7.8	7.0	658	233	750	340	320 AA	E	C	B	69))
	225/50ZR17 *	98W XL	7.8	7.0	658	233	750	340	320 AA	E	C	B	69))
	225/55ZR17 *	101W XL	7.8	7.0	680	233	825	340	320 AA	E	C	B	69))
18 Inch	235/45ZR17 *	97W XL	7.8	8.0	644	236	730	340	320 AA	E	C	B	69))
	225/40ZR18 *	92W XL	7.8	8.0	637	230	630	340	320 AA	E	C	B	69))
	225/45ZR18 *	95W XL	7.8	7.5	659	225	690	340	320 AA	E	C	B	69))
	235/40ZR18 *	95W XL	7.8	8.5	645	241	690	340	320 AA	E	C	B	69))
	245/40ZR18 *	97W XL	7.8	8.5	653	248	730	340	320 AA	E	C	B	69))
	245/45ZR18 *	100W XL	7.8	8.0	677	243	800	340	320 AA	E	C	B	69))
19 Inch	225/35ZR19 *	88W XL	7.8	8.0	641	230	560	340	320 AA	E	C	B	69))
	235/35ZR19 *	91W XL	7.8	8.5	647	241	615	340	320 AA	E	C	B	69))
	245/35ZR19 *	93W XL	7.8	8.5	655	248	650	340	320 AA	E	C	B	69))
16 Inch	195/45R16	84V	7.8	6.5J	582	195	500	300	400 AA	E	C	B	69))
	195/50R16	84V	7.8	6.0J	602	201	500	300	400 AA	E	C	B	69))
	195/55R16	87V	7.8	6.0J	620	201	545	300	400 AA	E	C	B	69))
	195/55R16	91W	7.8	6.0J	620	201	615	340	400 AA	E	C	B	69))
	205/50R16	87W	7.8	6.5J	612	214	545	300	320 AA	E	C	B	69))
17 Inch	235/55R17	103V XL	7.8	7.5J	690	245	875	340	320 AA	E	C	B	69))
	245/45R17	99W XL	7.8	8.0J	652	243	775	340	320 AA	E	C	B	69))
18 Inch	215/40R18	89W XL	7.8	7.5J	629	218	580	340	320 AA	E	C	B	69))
	235/45R18	100W XL	7.8	8.0J	669	236	750	340	320 AA	E	C	B	69))
	245/50R18	104W XL	7.8	7.5J	703	253	900	340	320 AA	E	C	B	69))
	255/35R18	94W XL	7.8	9.0J	635	260	670	340	320 AA	E	C	B	69))
	255/45R18	103W XL	7.8	8.5J	687	255	875	340	320 AA	E	C	B	69))
	255/55R18	109W XL	7.8	8.0J	737	265	1030	340	320 AA	E	C	B	69))
19 Inch	245/45R19	102W XL	7.8	8.0J	703	243	850	340	320 AA	E	C	B	69))
	255/30R19	91W XL	7.8	9.0J	637	280	615	340	320 AA	E	C	B	69))
	255/35R19	96W XL	7.8	9.0J	661	260	710	340	320 AA	E	C	B	69))
	255/40R19	100W XL	7.8	9.0J	687	260	800	340	320 AA	E	C	B	69))
20 Inch	255/30R20	92W XL	7.5	9.0J	662	260	630	340	320 AA	E	C	B	69))
	275/35R20	102W XL	7.5	9.5J	700	278	850	340	320 AA	E	C	B	69))
22"	295/40R22	112W XL	7.5	10.5J	795	301	1120	340	320 AA	E	C	B	69))

*RP Rim Protector ✕ Sizes will be released soon

FM316



Features & Benefits

- Straight wide circumferential grooves provide excellent drainage and anti-hydroplaning performance
- Dual semi center rib helps directional driving stability at high speeds and excellent steering response
- High angle tread blocks extend the contact patch and promote aggressive biting edges for maximum grip
- Variable pitch tread design is optimized to ensure low noise and smooth ride

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
13 Inch	155/65R13	73T	7.6	4.5	532	157	365	300	400 AA	E	M+S	F	B	70))
	155/70R13	75T	7.6	4.5	548	157	387	300	400 AA	E	M+S	F	B	70))
	155/80R13	79T	7.6	4.5	578	157	437	300	400 AA	E	M+S	F	B	70))
	165/65R13	77T	7.6	4.5	544	170	412	300	400 AA	E	M+S	F	B	70))
	165/70R13	79T	7.6	5.0	562	170	437	300	400 AA	E	M+S	F	B	70))
	165/80R13	83T	7.6	4.5	594	165	487	300	400 AA	E	M+S	F	B	70))
	175/60R13	77T	7.6	5.0	540	177	412	300	400 AA	E	M+S	F	B	70))
	175/70R13	82S	7.6	5.0	576	177	475	300	400 AA	E	M+S	F	B	70))
	175/70R13	82T	7.6	5.0	576	177	475	300	400 AA	E	M+S	F	B	70))
	185/70R13	86H	7.8	5.5	590	189	530	300	400 AA	E	M+S	F	B	70))
	185/70R13	88T	7.8	5.5	590	189	530	300	400 AA	E	M+S	F	B	70))
	165/70R14	81T	7.6	5.0	588	170	462	300	400 AA	E	M+S	F	B	70))
175/65R14	82H	7.6	5.0	584	177	475	300	400 AA	E	M+S	F	B	70))	
175/65R14	82T	7.6	5.0	584	177	475	300	400 AA	E	M+S	F	B	70))	
175/65R14	86T XL	7.6	5.0	584	177	530	340	400 AA	E	M+S	F	B	70))	
175/70R14	84S	7.6	5.0	602	177	500	300	400 AA	E	M+S	F	B	70))	
175/70R14	84T	7.6	5.0	602	177	500	300	400 AA	E	M+S	F	B	70))	
185/60R14	82H	7.8	5.5	578	189	475	300	400 AA	E	M+S	F	B	70))	
185/60R14	82T	7.8	5.5	578	189	475	300	400 AA	E	M+S	F	B	70))	
185/65R14	86H	7.8	5.5	596	189	530	300	400 AA	E	M+S	F	B	70))	

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
14 Inch	185/65R14	86T	7.8	5.5	596	189	530	300	400 AA	E	M+S	F	B	70))
	185/70R14	88H	8.0	5.5	616	189	560	300	400 AA	E	M+S	F	B	70))
	185/70R14	88T	8.0	5.5	616	189	560	300	400 AA	E	M+S	F	B	70))
	195/60R14	86H	7.8	6.0	590	201	530	300	400 AA	E	M+S	F	B	70))
	195/65R14	89H	8.0	6.0	610	201	580	300	400 AA	E	M+S	F	B	70))
	195/65R14	89T	8.0	6.0	610	201	580	300	400 AA	E	M+S	F	B	70))
	195/70R14	91H	8.0	6.0	630	201	615	300	400 AA	E	M+S	F	B	70))
	195/70R14	91T	8.0	6.0	630	201	615	300	400 AA	E	M+S	F	B	70))
	205/60R14	88H	8.0	6.0	602	209	560	300	400 AA	E	M+S	F	B	70))
	205/70R14	95H	8.2	6.0	644	209	690	300	400 AA	E	M+S	F	B	70))
	205/70R14	95T	8.2	6.0	644	209	690	300	400 AA	E	M+S	F	B	70))
	215/70R14	96H	8.2	6.5	658	221	710	300	400 AA	E	M+S	F	B	70))
215/70R14	96T	8.2	6.5	658	221	710	300	400 AA	E	M+S	F	B	70))	
15 Inch	185/55R15 *	82H	8.0	6.0	585	194	475	300	400 AA	E	M+S	F	B	70))
	185/55R15 *	82V	8.0	6.0	585	194	475	300	400 AA	E	M+S	F	B	70))
	185/60R15	88H XL	8.0	5.5	603	189	560	340	400 AA	E	M+S	F	B	70))
	185/60R15	88V XL	8.0	5.5	603	189	560	340	400 AA	E	M+S	F	B	70))
	185/65R15	88H	8.0	5.5	621	189	560	300	400 AA	E	M+S	F	B	70))
	185/65R15	88T	8.0	5.5	621	189	560	300	400 AA	E	M+S	F	B	70))
	195/50R15 *	82H	8.0	6.0	577	201	475	300	400 AA	E	M+S	F	B	70))
	195/50R15 *	82V	8.0	6.0	577	201	475	300	400 AA	E	M+S	F	B	70))
	195/55R15 *	85H	8.0	6.0	595	201	515	300	400 AA	E	M+S	F	B	70))
	195/55R15 *	85V	8.0	6.0	595	201	515	300	400 AA	E	M+S	F	B	70))
	195/60R15	88H	8.0	6.0	615	201	560	300	400 AA	E	M+S	F	B	70))
	195/60R15	88V	8.0	6.0	615	201	560	300	400 AA	E	M+S	F	B	70))
	195/65R15	91H	7.6	6.0	635	201	615	300	400 AA	E	M+S	E	B	70))
	195/65R15	91V	7.6	6.0	635	201	615	300	400 AA	E	M+S	E	B	70))
	205/60R15	91H	8.0	6.0	627	209	615	300	400 AA	E	M+S	E	B	70))
	205/60R15	91V	8.0	6.0	627	209	615	300	400 AA	E	M+S	E	B	70))
	205/65R15	94H	8.2	6.0	647	209	670	300	400 AA	E	M+S	E	B	70))
	205/65R15	94V	8.2	6.0	647	209	670	300	400 AA	E	M+S	E	B	70))
	205/70R15	96H	8.2	6.0	669	209	710	300	400 AA	E	M+S	E	B	70))
	205/70R15	96T	8.2	6.0	669	209	710	300	400 AA	E	M+S	E	B	70))
	215/60R15	94H	8.2	6.5	639	221	670	300	400 AA	E	M+S	E	B	70))
	215/65R15	96H	8.2	6.5	661	221	710	300	400 AA	E	M+S	E	B	70))
	215/70R15	98H	8.2	6.5	683	221	750	300	400 AA	E	M+S	E	B	70))
	225/60R15	96V	8.2	6.5	651	228	710	300	400 AA	E	M+S	E	B	70))
16 Inch	205/55R16	90V	7.6	6.5	632	214	600	300	400 AA	E	M+S	E	B	70))
	205/55R16	91H	7.6	6.5	632	214	600	300	400 AA	E	M+S	E	B	70))
	205/55R16	91V	7.6	6.5	632	214	600	300	400 AA	E	M+S	E	B	70))
	205/55ZR16	91W	7.6	6.5	632	214	600	300	400 AA	E	M+S	E	B	70))
	205/55R16	94V XL	7.6	6.5	632	214	670	340	400 AA	E	M+S	E	B	70))
	205/55ZR16	94W XL	7.6	6.5	632	214	670	340	400 AA	E	M+S	E	B	70))
	205/60R16	92H	8.2	6.0	652	209	630	300	400 AA	E	M+S	E	B	70))
	205/65R16	95H	8.2	6.0	672	209	690	300	400 AA	E	M+S	E	B	70))
	215/55R16	93V	8.2	7.0	642	226	650	300	400 AA	E	M+S	E	B	70))
	215/55R16	97W	8.2	7.0	642	226	730	300	400 AA	E	M+S	E	B	70))
	215/60R16	95H	8.2	6.5	664	221	690	300	400 AA	E	M+S	E	B	70))
	215/65R16	98H	8.2	6.5	661	221	750	300	400 AA	E	M+S	E	B	70))
	225/55R16	95V	8.2	7.0	654	233	690	300	400 AA	E	M+S	E	B	70))
	225/60R16	98H	8.2	6.5	676	228	750	300	400 AA	E	M+S	E	B	70))
	235/60R16	100H	8.2	7.0	698	240	800	300	400 AA	E	M+S	E	B	70))
	17"	215/55R17	94V	8.2	7.0	668	226	670	300	400 AA	E	M+S	E	B

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
17"	225/55R17	101H XL	8.2	7.0	680	233	825	340	400 AA	E	M+S	E	B	70))
13 Inch	185/65R13 ☆	77T	7.6	4.5	544	170	412	300	400 AA	E	M+S	F	B	70))
	175/70R13 ☆	82T	7.8	5.0	576	177	475	300	400 AA	E	M+S	F	B	70))
14 Inch	185/70R14 ☆	88H	8.0	5.5	616	189	560	300	400 AA	E	M+S	F	B	70))
	185/70R14 △	88H	8.0	5.5	616	189	560	300	400 AA	E	M+S	F	B	70))
	195/70R14 ☆	91H	8.0	6.0	630	201	615	300	400 AA	E	M+S	E	B	70))
	195/70R14 △	91H	8.0	6.0	630	201	615	300	400 AA	E	M+S	E	B	70))
15 Inch	195/65R15 ☆	91H	7.6	6.0	635	201	615	300	400 AA	E	M+S	E	B	70))
	195/65R15 △	91H	7.6	6.0	635	201	615	300	400 AA	E	M+S	E	B	70))

*RP-Rim Protector ☆RWV-Raised White Wall △RWL-Raised White Letter



FM318



Features & Benefits

- 4 wide longitudinal grooves and lateral grooves effectively evacuate water and resist hydroplaning
- Micro groove enhances optimized traction performance in the wet and snow during all four seasons
- Straight center rib block helps directional driving stability at high speeds and excellent steering response
- Large shoulder blocks and center ribs provide high responsiveness and high speed stability
- Variable pitch tread design reduces pattern noise to ensure a quiet and smooth ride

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
13 Inch	155/60R13	79T	7.6	4.5	578	157	300	437	480 AA	E	M+S	-	-	-
	175/70R13	82S	7.8	5.0	576	177	300	475	480 AA	E	M+S	-	-	-
	175/70R13	82T	7.8	5.0	576	177	300	475	480 AA	E	M+S	-	-	-
	175/65R14	82T	7.8	5.0	584	177	300	475	480 AA	E	M+S	-	-	-
	170/70R14	84S	7.8	5.0	602	177	300	500	480 AA	E	M+S	-	-	-
14 Inch	175/70R14	84T	7.8	5.0	602	177	300	500	480 AA	E	M+S	-	-	-
	185/60R14	82H	7.8	5.5	578	189	475	300	480 AA	E	M+S	-	-	-
	185/65R14	86H	7.8	5.5	596	187	530	300	480 AA	E	M+S	-	-	-
	185/65R14	86T	7.8	5.5	596	187	530	300	480 AA	E	M+S	-	-	-
	185/70R14	88T	7.8	5.5	616	187	500	300	480 AA	E	M+S	-	-	-
	185/75R14	89S	7.8	5.0	634	184	300	580	480 AA	E	M+S	-	-	-
	185/75R14	89T	7.8	5.0	634	184	300	580	480 AA	E	M+S	-	-	-
	195/60R14	86H	8.1	6.0	590	201	530	300	480 AA	E	M+S	-	-	-
	195/70R14	91T	7.8	6.0	630	198	615	300	480 AA	E	M+S	-	-	-
	195/75R14	92S	7.8	5.5	648	196	300	630	480 AA	E	M+S	-	-	-
	195/75R14	92T	7.8	5.5	648	196	300	630	480 AA	E	M+S	-	-	-
	205/70R14	95T	8.1	6.0	644	208	600	300	480 AA	E	M+S	-	-	-
	205/75R14	95S	8.1	5.5	664	203	300	690	480 AA	E	M+S	-	-	-
	205/75R14	95T	8.1	5.5	664	203	300	690	480 AA	E	M+S	-	-	-
	215/70R14	96T	8.1	6.5	658	221	710	300	480 AA	E	M+S	-	-	-

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
15 Inch	165/60R15	87T	7.6	4.5	645	165	545	300	400 AA	E	M+S	-	-	-
	185/55R15	82H	7.8	6.0	585	194	475	300	480 AA	E	M+S	-	-	-
	185/55R15	82V	7.8	6.0	585	194	475	300	480 AA	E	M+S	-	-	-
	185/60R15	84H	7.8	5.5	603	189	500	300	480 AA	E	M+S	-	-	-
	185/60R15	84T	7.8	5.5	603	189	500	300	480 AA	E	M+S	-	-	-
	185/65R15	88H	7.8	5.5	621	189	560	300	480 AA	E	M+S	-	-	-
	185/65R15	88T	7.8	5.5	621	189	560	300	480 AA	E	M+S	-	-	-
	195/55R15	85H	8.1	6.0	595	201	515	300	480 AA	E	M+S	-	-	-
	195/55R15	85V	8.1	6.0	595	201	515	300	480 AA	E	M+S	-	-	-
	195/60R15	88H	8.1	6.0	615	198	560	300	480 AA	E	M+S	-	-	-
	195/60R15	88V	8.1	6.0	615	198	560	300	480 AA	E	M+S	-	-	-
	195/65R15	91H	8.1	6.0	635	201	615	300	480 AA	E	M+S	-	-	-
	195/65R15	91T	8.1	6.0	635	201	615	300	480 AA	E	M+S	-	-	-
	195/65R15	91V	8.1	6.0	635	201	615	300	480 AA	E	M+S	-	-	-
	205/60R15	91H	8.1	6.0	627	210	615	300	480 AA	E	M+S	-	-	-
	205/60R15	91V	8.1	6.0	627	210	615	300	480 AA	E	M+S	-	-	-
	205/65R15	94H	8.1	6.0	647	209	670	300	480 AA	E	M+S	-	-	-
	205/65R15	94V	8.1	6.0	647	209	670	300	480 AA	E	M+S	-	-	-
	205/70R15	96T	8.1	6.0	669	206	710	300	480 AA	E	M+S	-	-	-
	215/65R15	96H	8.1	6.5	661	221	710	300	480 AA	E	M+S	-	-	-
	215/65R15	96V	8.1	6.5	661	221	710	300	480 AA	E	M+S	-	-	-
215/70R15	98T	8.1	6.5	684	219	750	300	480 AA	E	M+S	-	-	-	
16 Inch	205/55R16	91H	8.1	6.5	632	214	615	300	480 AA	E	M+S	-	-	-
	205/55R16	91V	8.1	6.5	632	214	615	300	480 AA	E	M+S	-	-	-
	205/60R16	92H	8.1	6.0	652	209	630	300	480 AA	E	M+S	-	-	-
	205/60R16	92V	8.1	6.0	652	209	630	300	480 AA	E	M+S	-	-	-
	205/65R16	95H	8.1	6.0	672	209	690	300	480 AA	E	M+S	-	-	-
	205/65R16	95V	8.1	6.0	672	209	690	300	480 AA	E	M+S	-	-	-
	215/55R16	93H	8.1	7.0	642	226	650	300	480 AA	E	M+S	-	-	-
	215/55R16	93V	8.1	7.0	642	226	650	300	480 AA	E	M+S	-	-	-
	215/60R16	95H	8.1	6.5	664	221	690	300	480 AA	E	M+S	-	-	-
	215/60R16	95V	8.1	6.5	664	221	690	300	480 AA	E	M+S	-	-	-
	215/65R16	98H	8.1	6.5	686	221	750	300	480 AA	E	M+S	-	-	-
	215/65R16	98T	8.1	6.5	686	221	750	300	480 AA	E	M+S	-	-	-
	215/65R16	98V	8.1	6.5	686	221	750	300	480 AA	E	M+S	-	-	-
	225/60R16	98H	8.1	6.5	676	228	750	300	480 AA	E	M+S	-	-	-
	225/60R16	98V	8.1	6.5	676	228	750	300	480 AA	E	M+S	-	-	-
13 Inch	P155/80R13	79T	7.6	4.5	578	157	437	300	400 AA	E	M+S	-	-	-
	P175/70R13	82S	7.8	5	576	177	475	300	480 AA	E	M+S	-	-	-
	P175/70R13	82T	7.8	5	576	177	475	300	480 AA	E	M+S	-	-	-
14 Inch	P175/70R14	84S	7.8	5	602	177	500	300	480 AA	E	M+S	-	-	-
	P175/70R14	84T	7.8	5	602	177	500	300	480 AA	E	M+S	-	-	-
	P185/75R14	89S	7.8	5	634	184	580	300	480 AA	E	M+S	-	-	-
	P185/75R14	89T	7.8	5	634	184	580	300	480 AA	E	M+S	-	-	-
	P195/75R14	92S	7.8	5.5	648	196	630	300	480 AA	E	M+S	-	-	-
	P195/75R14	92T	7.8	5.5	648	196	630	300	480 AA	E	M+S	-	-	-
	P205/75R14	95S	8.1	5.5	664	203	690	300	480 AA	E	M+S	-	-	-
	P205/75R14	95T	8.1	5.5	664	203	690	300	480 AA	E	M+S	-	-	-
	P215/75R14	98S	8.1	6	678	216	750	300	480 AA	E	M+S	-	-	-
	P215/75R14	98T	8.1	6	678	216	750	300	480 AA	E	M+S	-	-	-

FM319



Features & Benefits

- 4 straight wide circumferential grooves and lateral sipes provide good drainage and excellent wet traction
- Straight center rib block helps directional driving stability at high speeds and excellent steering response
- Rigid shoulder block design deliver enhanced cornering and handling stability
- Variable pitch design reduces pattern noise to ensure a quite and smooth ride

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
15 Inch	195/65R15	91H	8.2	6.0	635	201	615	300	460 AA	E	M+S	-	-	-
	215/60R15	94H	8.2	6.5	639	218	670	300	460 AA	E	M+S	-	-	-
	215/75R15	100H	8.5	6.0	703	216	800	300	460 AA	E	M+S	-	-	-
16 Inch	205/50R16	87V	8.2	6.5	612	214	545	300	460 AA	E	M+S	-	-	-
	205/50ZR16	87W	8.2	6.5	612	214	545	300	460 AA	E	M+S	-	-	-
	225/55R16	99V XL	8.5	7.0	654	233	775	340	460 AA	E	M+S	-	-	-
	235/60R16	100H	8.5	7.0	688	240	800	300	460 AA	E	M+S	-	-	-
16"	225/60R16	100V	8.5	7.0	688	240	800	300	460 AA	E	M+S	-	-	-
16"	225/55R18	98V	8.0	7.0	705	233	750	300	460 AA	E	M+S	-	-	-

FM393



Features & Benefits

- 4 main straight and wide longitudinal grooves effectively evacuate water and resist hydroplaning
- Wide shoulder block and enhanced center blocks improve handling response and high speed stability
- Equal division of block stiffness prevents abnormal wear and enhanced noise performance
- Variable pitch tread design reduces pattern noise to ensure a quiet and smooth ride

INCH	SIZE	L.I. / S.R	T.D. mm	R.W Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
16 Inch	205/55R16	91V	8.7	6.5	632	214	615	300	700 AA	E	M+S	-	-	-
	215/55R16	93V	8.7	7.0	642	226	650	300	700 AA	E	M+S	-	-	-
	225/55R16 *	95V	8.7	7.0	654	233	690	300	700 AA	E	M+S	-	-	-
	215/60R16	95H	8.7	6.5	664	221	690	300	700 AA	E	M+S	-	-	-
	225/60R16	98H	8.7	6.5	676	228	750	300	700 AA	E	M+S	-	-	-
17 Inch	215/55R17 *	94V	8.7	7.0	668	226	670	300	700 AA	E	M+S	-	-	-
	215/60R17	96H	8.7	6.5	690	221	690	300	710 AA	E	M+S	-	-	-
	215/65R17	99H	8.7	6.5	712	221	775	300	700 AA	E	M+S	-	-	-
	225/55R17 *	97V	8.7	7.0	680	233	730	300	700 AA	E	M+S	-	-	-
	225/60R17	99H	8.7	6.5	702	228	775	300	700 AA	E	M+S	-	-	-
18 Inch	225/55R18 *	98V	8.7	7.0	705	233	750	300	700 AA	E	M+S	-	-	-
	225/60R18 *	100H	8.7	6.5	727	228	800	300	700 AA	E	M+S	-	-	-
16 Inch	P205/55R16	89V	8.7	6.5	632	214	300	580	700 AA	E	M+S	-	-	-
	P215/55R16 *	91V	8.7	7.0	642	226	300	615	700 AA	E	M+S	-	-	-
	P215/60R16	94H	8.7	6.5	664	221	300	670	700 AA	E	M+S	-	-	-
	P225/55R16	94V	8.7	7.0	654	233	300	670	700 AA	E	M+S	-	-	-
	P225/60R16	97H	8.7	6.5	676	228	300	730	700 AA	E	M+S	-	-	-
17 Inch	P215/55R17 *	93V	8.7	7.0	668	226	300	650	700 AA	E	M+S	-	-	-
	P215/60R17	95H	8.7	6.5	690	221	300	690	700 AA	E	M+S	-	-	-
	P215/65R17	98H	8.7	6.5	712	221	300	750	700 AA	E	M+S	-	-	-

INCH	SIZE	L.I. / S.R	T.D. mm	R.W Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
17 Inch	P225/55R17*	95V	8.7	7.0	680	233	300	690	700 AA	E	M+S	-	-	-
	P225/60R17	98H	8.7	6.5	702	228	300	750	700 AA	E	M+S	-	-	-
18 Inch	P225/55R18 *	97V	8.7	7.0	705	233	300	730	700 AA	E	M+S	-	-	-
	P225/60R18 *	99H	8.7	6.5	727	228	300	775	700 AA	E	M+S	-	-	-

*RP-Rim Protector



FM602



Features & Benefits

- 4 straight wide grooves provide excellent drainage and anti-hydroplaning performance
- Straight center rib helps directional driving stability at high speeds and excellent steering response
- Rim protector design helps protect wheels against accidental curb damage
- High angle tread blocks extend the contact patch and promote aggressive biting edges for maximum grip
- High stiffness shoulder blocks improve cornering performance, handling stability and ride comfort at high speeds
- Special silica compound blends maximize grip and handling dry while maintaining outstanding wear characteristics

FM515



Features & Benefits

- 4 wide straight grooves provide excellent drainage and anti-hydroplaning performance
- Straight center rib block design helps directional driving stability at high speeds and steering response
- An equal division of center block stiffness prevents abnormal wear and enhances noise performance
- Pitched type enhanced shoulder block stiffness delivers the maximum grip during high-speed cornering

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW	RR	WG	NOISE
20 Inch	225/30ZR20 *	85W XL	7.9	8.0	644	230	515	340	320 AA	E	M+S	-	-	-
	225/35ZR20 *	90W XL	7.9	8.0	666	230	600	340	320 AA	E	M+S	-	-	-
	245/35ZR20 *	95W XL	7.9	8.5	680	248	690	340	320 AA	E	M+S	-	-	-
	255/35ZR20 *	97Y XL	7.9	9.0	686	260	730	340	320 AA	E	M+S	-	-	-
	275/40ZR20 *	106W XL	7.9	9.5	728	278	950	340	320 AA	E	M+S	-	-	-
	275/45ZR20 *	110W XL	7.9	9.0	756	273	1060	340	320 AA	E	M+S	-	-	-
22 Inch	265/50ZR20 *	111W XL	7.9	8.5	774	277	1090	340	320 AA	E	M+S	-	-	-
	265/50ZR20 *	116W XL	7.9	9.0	794	297	1250	340	320 AA	E	M+S	-	-	-
	245/30ZR22 *	92W XL	7.9	8.5	707	248	630	340	320 AA	E	M+S	-	-	-
	255/30ZR22 *	95W XL	7.9	9.0	713	260	690	340	320 AA	E	M+S	-	-	-
	265/35ZR22 *	102W XL	7.9	9.5	745	271	850	340	320 AA	E	M+S	-	-	-
	305/40ZR22 *	114W XL	7.9	11.0	803	313	1180	340	320 AA	E	M+S	-	-	-
24 Inch	255/30ZR24 *	97W XL	7.9	9.0	764	260	730	340	320 AA	E	M+S	-	-	-
	305/35ZR24 *	112W XL	7.9	11.0	824	313	1120	340	320 AA	E	M+S	-	-	-
26"	305/30R26 *	109V XL	7.9	11.0	844	313	1000	340	320 AA	E	M+S	-	-	-
28"	325/35R28 *	120V XL	7.9	11.5	939	331	1400	340	320 AA	E	M+S	-	-	-

*RP-Rim Protector

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	UTQG	E-MARK	MUD+SNOW
15 Inch	205/70R15	96H	STD	8.2	6.0	669	209	710	300	-	E	M+S
	235/75R15	105H	STD	9.0	6.5	733	235	925	300	-	E	M+S
16 Inch	215/65R16	102H XL	STD	8.2	6.5	686	221	850	340	-	E	M+S
	225/70R16	103H	STD	9.0	6.5	722	228	875	300	-	E	M+S
	235/60R16	100H	STD	9.0	7.0	688	240	800	300	-	E	M+S
	235/70R16	106H	STD	9.2	7.0	736	240	950	300	-	E	M+S
	245/70R16	107H	STD	9.2	7.0	750	248	975	300	-	E	M+S
17"	265/70R16	112H	STD	9.5	8.0	778	272	1120	300	-	E	M+S
	235/65R17	108V XL	STD	9.0	7.0	712	240	1000	340	-	E	M+S
18 Inch	235/60R18	107V XL	STD	9.0	7.0	739	240	975	340	-	E	M+S
	255/55R18	109V XL	STD	9.0	8.0	737	265	1030	340	-	E	M+S

FM517



Features & Benefits

- 4 straight grooves and slightly curved grooves maximize water drainage and resist hydroplaning
- Straight center rib block design helps directional driving stability and excellent steering response
- Applying the second rib reversed blocks optimize the stiffness to deliver higher driving stability
- Wide shoulder with equal block division design delivers excellent cornering and handling stability
- Shoulder semi longitudinal grooves enhance cornering and handling performance on wet roads

FM518



Features & Benefits

- 4 straight grooves and slightly curved grooves maximize water drainage and resist hydroplaning
- Straight center rib block design helps directional driving stability and excellent steering response
- Applying the second rib reversed blocks optimize the stiffness to deliver higher driving stability
- Wide shoulder with equal block division design delivers excellent cornering and handling stability
- Shoulder semi longitudinal grooves enhance cornering and handling performance on wet roads
- Micro sipes design enhances driving performance and improve traction on wet roads

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
14 Inch	195/75R14	92S	STD	8.3	5.5	648	196	630	300	-	E	M+S
	205/75R14	95S	STD	8.3	5.5	664	203	690	300	-	E	M+S
15 Inch	205/70R15	96S	STD	8.3	6.0	669	209	710	300	-	E	M+S
	205/75R15	97S	STD	8.3	5.5	689	203	730	300	-	E	M+S
	215/70R15	97S	STD	8.3	6.5	683	221	750	300	-	E	M+S
	215/75R15	100S	STD	8.3	6.0	703	216	800	300	-	E	M+S
	225/70R15	100S	STD	8.3	6.5	697	228	800	300	-	E	M+S
	225/75R15	102S	STD	8.3	6.0	719	223	850	300	-	E	M+S
	235/75R15	105S	STD	8.3	6.5	733	235	925	300	-	E	M+S

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
16 Inch	215/70R16 ※	100H	STD	8.0	6.5	708	221	800	300	-	E	M+S
	225/70R16 ※	103H	STD	8.0	6.5	722	228	875	300	-	E	M+S
	235/70R16 ※	106H	STD	8.0	7.0	736	240	950	300	-	E	M+S
	245/70R16 ※	111H	STD	8.0	7.0	750	248	1090	300	-	E	M+S
	265/70R16 ※	112H	STD	8.0	8.0	778	272	1120	300	-	E	M+S
	215/60R17 ※	96V	STD	8.0	6.5	690	221	710	300	-	E	M+S
17 Inch	225/65R17 ※	102H	STD	8.0	6.5	724	228	850	300	-	E	M+S
	235/55R17 ※	99/103V	STD	8.0	7.5	690	245	775	300	-	E	M+S
	235/65R17 ※	104/108H	STD	8.0	7.0	738	240	900	300	-	E	M+S
	245/65R17 ※	111H	STD	8.0	7.0	750	248	1090	300	-	E	M+S
	265/65R17 ※	112H	STD	8.0	8.0	776	272	1120	300	-	E	M+S
18 Inch	235/50R18 ※	101V	STD	8.0	7.5	693	245	825	300	-	E	M+S
	235/60R18 ※	107V XL	STD	8.0	7.0	739	240	975	340	-	E	M+S
	255/55R18 ※	109V	STD	8.0	8.0	737	265	1030	300	-	E	M+S
	285/60R18 ※	116V	STD	8.0	8.5	799	292	1250	300	-	E	M+S

※ Sizes will be released soon

FM519



Features & Benefits

- 4 channel groove maximizes water drainage for improved handling and grip in all weather conditions
- Solid center rib with biting edges helps directional driving stability, reduces road noise at high speeds
- Wide shoulder blocks with directional sipes provide excellent cornering grip and handling stability
- The optimized tread contact patch provides uniform distribution of contact pressure for longer life

FM501



Features & Benefits

- All terrain pattern delivers superior traction for SUVs, pickups and vans both off/on the road
- Reinforced biting edges on off-roads by strengthening block stiffness through a staggered solid center rib
- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions
- Multi directional sipe system for extra deep tread sipes at varying angles improve comfort without sacrificing traction

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
15 Inch	215/75R15	100S	10PR	10.0	6.0	703	216	800	300	420 AA	E	M+S
	225/75R15	102S	10PR	10.0	6.0	719	223	850	300	420 AA	E	M+S
	225/75R15	102T	10PR	10.0	6.0	719	223	850	300	420 AA	E	M+S
	215/75R15 **	100S	10PR	10.0	6.0	703	216	800	300	420 AA	E	M+S
	225/75R15 **	102S	10PR	10.0	6.0	719	223	850	300	420 AA	E	M+S

** OWL-Outlined White Letter

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
15"	235/75R15 **	109T XL	STD	9.5	6.5	733	235	1030	340	480 AB	E	M+S
	235/70R16 **	106T	STD	9.5	7.0	736	240	950	300	480 AB	E	M+S
16 Inch	245/70R16 **	107T	STD	9.5	7.0	750	248	975	300	480 AB	E	M+S
	265/70R16 **	112T	STD	9.5	8.0	778	272	1120	300	480 AB	E	M+S
	235/65R17 **	108T XL	STD	9.5	7.0	738	240	1000	340	480 AB	E	M+S
17 Inch	245/65R17 **	107T	STD	9.5	7.0	750	248	975	300	480 AB	E	M+S
	265/65R17 **	112T	STD	9.5	8.0	776	272	1120	300	480 AB	E	M+S
	265/70R17 **	115T	STD	9.5	8.0	804	272	1215	300	480 AB	E	M+S
18 Inch	265/60R18 **	110T	STD	9.5	8.0	775	272	1060	300	480 AB	E	M+S
	275/65R18 **	118T	STD	9.5	8.0	815	279	1250	300	480 AB	E	M+S
20 Inch	265/50R20 **	111T XL	STD	9.5	8.5	774	277	1090	340	480 AB	E	M+S
	275/55R20 **	117T XL	STD	9.5	8.5	810	284	1285	340	480 AB	E	M+S
	275/60R20 **	115T	STD	9.5	8.0	838	279	1215	300	480 AB	E	M+S
15"	31x10.50R15 LT **	109S	6PR	11.5	8.5	769	275	1030	350	-	E	M+S
	LT215/75R15 **	106/103S	8PR	11.5	6.0	703	216	950	450	-	E	M+S
16 Inch	LT215/85R16 **	115/112S	10PR	11.5	6.0	772	216	1215/1120	450	-	E	M+S
	LT235/85R16 **	120/116S	10PR	11.5	6.5	806	235	1400/1250	450	-	E	M+S
	LT225/75R16 **	115/112S	10PR	11.5	6.0	744	223	1215/1120	450	-	E	M+S
	LT245/75R16 **	120/116S	10PR	11.5	7.0	777	250	1400/1250	450	-	E	M+S
	LT265/75R16 **	123/120S	10PR	11.5	7.5	807	270	1550/1400	450	-	E	M+S

** OWL-Outlined White Letter

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
16"	LT285/75R16 **	122/119S	8PR	11.5	8.0	834	286	1500/1300	350	-	E	M+S
17 Inch	LT265/70R17 **	121/118S	10PR	11.5	8.0	804	272	1450/1320	450	-	E	M+S
	LT285/70R17 **	121/118S	8PR	11.5	8.5	832	292	1450/1320	350	-	E	M+S
20"	LT275/65R20 **	126 /123S	10PR	11.5	8.0	866	279	1700/1550	450	-	E	M+S

** Sizes will be released soon ** OWL-Outlined White Letter



FM502



Features & Benefits

- All terrain pattern delivers superior traction for SUVs, pickups and vans both off/on the road
- Reinforced biting edges on off-roads by strengthening block stiffness through a staggered solid center rib
- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions
- Multi directional sipe system for extra deep tread sipes at varying angles improve comfort without sacrificing traction

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C kg	STD.INFL kPa	UTQG	E-MARK	MUD+SNOW
15"	235/75R15 **	109T XL	STD	9.5	6.5	733	235	1030	300	480 A B	E	M+S
16"	265/70R16 **	112T	STD	9.5	8.0	778	272	1120	300	480 A B	E	M+S
17"	265/70R17 **	115T	STD	9.5	8.0	804	272	1215	300	480 A B	E	M+S
20"	275/55R20 **	117T XL	STD	9.5	8.5	810	284	1285	340	480 A B	E	M+S
15"	31x10.50R15 LT **	109S	6PR	11.5	8.5	769	275	1030	350	-	E	M+S
16 Inch	LT215/85R16 **	115/112S	10PR	11.5	6.0	772	216	1215/1120	450	-	E	M+S
	LT225/75R16 **	115/112S	10PR	11.5	6.0	744	223	1215/1120	450	-	E	M+S
	LT235/65R16 **	120/116S	10PR	11.5	6.5	806	235	1400/1250	450	-	E	M+S
	LT245/75R16 **	120/116S	10PR	11.5	7.0	777	250	1400/1250	450	-	E	M+S
	LT265/75R16 **	123/120S	10PR	11.5	7.5	807	270	1550/1400	450	-	E	M+S
	LT285/75R16 **	122/119S	8PR	11.5	8.0	834	286	1500/1360	350	-	E	M+S

** OWL-Outlined White Letter

FM523



Features & Benefits

- Deep grooves design offers enhanced traction in deep mud and gravel
- Shoulder protector design maximizes load durability for the maximum safety
- Optimized wide grooves provide excellent water drainage and anti-hydroplaning performance
- Zig-zag shoulder blocks provide great driving power from on&off-roads to wet and dry roads

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C kg	STD.JNFL kPa	UTQG	E-MARK	MUD+SNOW
14"	27x8.50R14 LT	95Q	6PR	14.3	7.0	674	218	890	350	-	E	M+S
	31x10.50R15 LT	109Q	6PR	14.7	8.5	769	275	1030	350	-	E	M+S
15 Inch	33x12.50R15 LT	108Q	6PR	15.1	10.0	826	318	1000	250	-	E	M+S
	LT 235/75R15	104/101Q	6PR	14.3	6.5	736	243	900/825	350	-	E	M+S
16 Inch	LT 245/75R16	120/116Q	10PR	14.3	7.0	777	250	1400/1250	550	-	E	M+S
	LT 285/75R16	123/120Q	10PR	14.7	7.5	807	270	1550/1400	550	-	E	M+S
	LT 285/75R16	122/119Q	8PR	14.9	8.0	834	286	1500/1360	450	-	E	M+S
17 Inch	LT 285/75R16	126/123Q	10PR	14.9	8.0	834	286	1700/1550	550	-	E	M+S
	33x12.50R17 LT	114Q	8PR	15.1	10.0	826	318	1180	350	-	E	M+S
	LT 265/70R17	118/115Q	8PR	14.7	8.0	804	272	1320/1215	450	-	E	M+S
18"	LT 285/70R17	121/118Q	10PR	14.9	8.5	832	292	1450/1320	550	-	E	M+S
	33x12.50R18 LT	118Q	10PR	15.1	10.0	826	318	1320	450	-	E	M+S
	LT 215/75R15 *△	106/103Q	8PR	14.3	6.0J	703	216	950/875	450	-	E	M+S
16 Inch	LT 225/75R16 *	115/112Q	10PR	14.3	6.0J	744	223	1215/1120	550	-	E	M+S
	LT 235/70R16 *△	110/107Q	8PR	14.3	7.0J	736	240	1060/975	350	-	E	M+S
	LT 235/85R16 *	120/116Q	10PR	14.3	6.5J	806	235	1400/1250	450	-	E	M+S
	LT 245/70R16 *△	113/110Q	8PR	14.3	7.0J	750	248	1150/1060	350	-	E	M+S
17"	LT 265/65R17 *△	120/117Q	10PR	14.3	8.0J	776	272	1400/1285	450	-	E	M+S
15"	32x11.50R15 LT *	113Q	6PR	14.3	9.0J	801	290	1150	350	-	E	M+S
17"	35x12.50R17 LT *	121Q	10PR	14.3	10.0J	877	318	1450	450	-	E	M+S

INCH	SIZE	L.I. / S.R	PR.	TD. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C kg	STD.JNFL kPa	UTQG	E-MARK	MUD+SNOW
18"	35x12.50R18 LT *	123Q	10PR	14.3	10.0J	877	318	1550	450	-	E	M+S
	33x12.50R20 LT *	114Q	10PR	14.3	10.0J	826	318	1180	550	-	E	M+S
20 Inch	35x12.50R20 LT *	121Q	10PR	14.3	10.0J	877	318	1450	550	-	E	M+S
	37x13.50R20 LT *	127Q	10PR	14.9	11.0J	928	345	1750	550	-	E	M+S
22 Inch	33x12.50R22 LT *	109Q	10PR	14.9	10.0J	826	318	1030	450	-	E	M+S
	35x12.50R22 LT *	127Q	10PR	14.9	10.0J	877	318	1750	450	-	E	M+S
	37x13.50R22 LT *	123Q	10PR	14.9	11.0J	928	345	1550	450	-	E	M+S

* Sizes will be released soon. △RWL-Raised White Letter: LT215/75R15, LT235/70R16, LT245/70R16, LT265/65R17



FM913



Features & Benefits

- 3 wide zig-zag grooves effectively evacuate water and resist hydroplaning
- Full depth S shaped sipes greatly improve heat dissipation and braking traction
- Large contact surface delivers the exceptional stability and resist uneven wear
- Wide shoulder block stiffness design provides excellent cornering and wet traction

FM915



Features & Benefits

- 4 wide grooves provides excellent drainage and anti-hydroplaning performance
- Special kerf arrangement upgrades grip power and traction in wet road conditions
- High stiffness shoulder blocks deliver the precise handling and progressive cornering
- Micro sipes design enhances driving performance and improve traction on wet roads

INCH	SIZE	L.I. / S.R	PR.	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	E-MARK	RR	WG	NOISE
14 Inch	175R14C	99/98Q	8PR	8.5	5.0	636	177	775/750	450	E	E	B	71))
	185R14C	102/100	8PR	10.5	5.5	652	189	850/800	450	E	E	B	71))
	195R14C	106/104Q	8PR	10.5	5.5	652	189	950/900	450	E	E	B	71))
	205/75R14C	109/107Q	8PR	8.5	5.5	664	203	1030/975	475	E	E	B	71))
15 Inch	195/70R15C	104/102S	8PR	10.5	6.0	655	201	900/850	450	E	E	B	71))
	195R15C	106/104R	8PR	8.5	5.5	693	196	950/900	450	E	E	B	71))
	205/70R15C	106/104R	8PR	10.5	6.0	669	209	950/900	450	E	E	B	71))
16 Inch	205/75R15C	103/100R	8PR	8.5	5.5	689	203	875/800	450	E	E	B	71))
	185/75R16C	104/102R	8PR	8.5	5.0	684	184	900/850	475	E	E	B	71))
	215/75R16C	113/111R	8PR	9.0	6.0	728	216	1150/1090	475	E	E	B	71))
14 Inch	185R14C ☆	102/100R	8PR	10.5	5.5	652	189	850/800	450	E	E	B	71))
	195R14C ☆	106/104Q	8PR	8.5	5.5	668	196	950/900	450	E	E	B	71))
	205/75R14C ☆	109/107R	8PR	8.5	5.5	664	203	1030/975	475	E	E	B	71))
15 Inch	195R15C ☆	106/104R	8PR	8.5	5.5	693	196	950/900	450	E	E	B	71))
	205/75R15C ☆	103/100R	8PR	8.5	5.5	689	203	875/800	450	E	E	B	71))

☆RWW-Raised White Wall

INCH	SIZE	L.I. / S.R	PR.	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	E-MARK	RR	WG	NOISE
14"	185R14C ※	102/100R	8PR	8.5	5.5J	650	188	850/800	450	E	-	-	-
	215/70R15C ※	109/107R	8PR	8.5	6.5J	683	221	1030/975	450	E	-	-	-
15 Inch	225/70R15C ※	112/110R	8PR	8.5	6.5J	697	228	1120/1060	450	E	-	-	-
	195/70R15C ※	104/102R	8PR	8.5	6.0J	655	201	900/850	450	E	-	-	-
	205/70R15C ※	106/104R	8PR	8.5	6.0J	669	209	950/900	450	E	-	-	-
16 Inch	185/75R16C	104/102R	8PR	8.5	5.0J	684	184	900/850	475	E	-	-	-
	195/65R16C ※	104/102R	8PR	8.5	6.0J	660	201	900/850	475	E	-	-	-
	195/75R16C ※	107/105R	8PR	8.5	5.5J	698	198	975/925	475	E	-	-	-
	205/65R16C ※	107/105R	8PR	8.5	6.0J	672	209	975/925	475	E	-	-	-
	215/65R16C ※	109/107R	8PR	8.5	6.5J	686	221	1030/975	475	E	-	-	-
	235/65R16C ※	115/113R	8PR	8.0	7.0J	712	240	1215/1150	475	E	-	-	-
	215/75R16C ※	113/111R	8PR	8.5	6.0J	728	216	1150/1090	475	E	-	-	-

※ Sizes will be released soon

FM916



Features & Benefits

- 3 straight wide grooves provide excellent water drainage and resist hydroplaning
- Continuous 2 center ribs with optimal block distribution help directional driving stability
- Enhanced shoulder block stiffness minimizes uneven tread wear for improved mileage
- J shaped sipes provide a comfort driving, low noise by absorbing the vibration from roads

S369



Features & Benefits

- 4 wide zig-zag grooves improve water drainage and wet traction
- Solid center ribs provide outstanding directional stability and road feel
- Shoulder design with lugs and sipes provides excellent heat dissipation
- Special tread compound provides an outstanding resistance to abrasion
- Large contact surface delivers exceptional stability and resist uneven wear

INCH	SIZE	LI./S.R	PR.	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	E-MARK	RR	WG	NOISE
14"	185R14C	102/100R	8PR	8.5	5.5	652	189	850/800	450	E	E	B	72))
15 Inch	195/70R15C	104/102R	8PR	8.5	6.0	655	201	900/850	450	E	E	B	72))
	225/70R15C	112/110R	8PR	8.5	6.5	697	228	1120/1060	450	E	E	B	72))
16 Inch	195/65R16C	104/102R	8PR	8.5	6.0	660	201	900/850	450	E	E	B	72))
	205/65R16C	107/105R	8PR	8.5	6.0	672	209	975/925	450	E	E	B	72))
	215/75R16C	113/111R	8PR	8.5	6.0	728	216	1150/1090	450	E	E	B	72))
15"	235/65R16C	115/113R	8PR	8.5	7.0	712	240	1215/1150	450	E	E	B	72))
	205/65R15C ✱	102/100R	6PR	8.5	6.0J	647	209	850/800	375	E	E	B	72))
16 Inch	195/60R16C ✱	99/97R	6PR	8.5	6.0J	640	201	775/730	375	E	E	B	72))
	215/60R16C ✱	108/106R	6PR	8.5	6.5J	664	221	1000/950	475	E	E	B	72))
	215/65R15C ✱	104/102R	6PR	8.5	6.5J	661	221	900/850	375	E	E	B	72))
	215/65R16C ✱	109/107R	8PR	8.5	6.5J	686	221	1030/975	475	E	E	B	72))
	225/65R16C ✱	112/110R	8PR	8.5	6.5J	698	228	1120/1060	475	E	E	B	72))
	205/75R16C ✱	113/111R	10PR	8.5	5.5J	714	203	1150/1090	525	E	E	B	72))

✱ Sizes will be released soon.

INCH	SIZE	LI./S.R	PR.	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa
16 Inch	6.50R16 LT	107/102N	10PR	11.3	5.5	745	187	975/850	450
	7.00R16 LT	115/110N	12PR	11.3	5.5	779	198	1215/1060	550

FM700



Features & Benefits

- 4 wide zig-zag grooves improve water drainage and wet traction
- Solid center wavy rib provide excellent driving stability and road feel
- 2 continuous center ribs with optimal blocks help stability, better braking force
- Shoulder blocks with wavy sipes provide excellent traction and heat dissipation
- Special formulated wear resistance compound delivers an exceptional mileage

FM701



Features & Benefits

- 4 wide zig-zag grooves improve water drainage and wet traction
- Solid center ribs provide excellent driving stability and road feel
- 2 continuous center ribs with optimal blocks help stability, better braking force
- Shoulder blocks with wavy sipes provide excellent traction and heat dissipation
- Special formulated wear resistance compound delivers an exceptional mileage

INCH	SIZE	L.I. / S.R	PR.	T.D. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa
15 Inch	ST225/75R15	113/108L	8PR	7.8	6.0	719	223	1150/1000	450
	ST225/75R15	117/112L	10PR	7.8	6.0	719	223	1285/1120	550

INCH	SIZE	L.I. / S.R	PR.	T.D. mm	R.W. Inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa
13"	ST175/60R13	91/87L	6PR	7.5	5.0	610	177	615/545	350
14 Inch	ST205/75R14	100/96L	6PR	8.2	5.5	664	203	800/710	350
	ST215/75R14	102/98L	6PR	8.2	6.0	678	216	850/750	350
15 Inch	ST205/75R15	101/97L	6PR	8.2	5.5	689	203	825/730	350
	ST205/75R15	107/102L	8PR	8.2	5.5	689	203	975/850	450
	ST225/75R15	113/108L	8PR	8.2	6.0	719	223	1150/1000	450
	ST225/75R15	117/112L	10PR	8.2	6.0	719	223	1285/1120	550
16 Inch	ST235/60R16	119/114L	8PR	8.2	6.5	782	235	1360/1160	450
	ST235/60R16	123/119L	10PR	8.2	6.5	782	235	1550/1360	550
	ST235/60R16	124/120L	10PR	8.2	6.5	782	235	1600/1400	550
	ST235/65R16	128/124L	12PR	8.0	6.5	806	235	1800/1600	660

FM805



Features & Benefits

- Asymmetrical pattern design offers even tread wear and great traction both on dry and wet roads
- 4 grooves+1 semi groove provide excellent water drainage and anti-hydroplaning performance
- Transverse and lateral grooves help to evacuate slush and water to maximize grip and control
- Multi high density siping maximises effective enhancement of grip and slush on icy and snow roads
- Specially formulated compounds keeps rubber flexible for maximum performance in extreme cold temperatures

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	MUD+SNOW	E-MARK	RR	WG	NOISE
13 Inch	155/65R13	73T	8.5	4.5	532	157	365	300	M+S	E	E	F	67
	165/70R13	79T	8.5	5.0	562	170	437	300	M+S	E	E	F	67
14 Inch	175/65R14	82T	8.5	5.0	584	177	475	300	M+S	E	E	F	67
	175/70R14	84S	8.5	5.0	602	177	500	300	M+S	E	E	F	67
	185/60R14	82T	8.5	5.5	578	189	475	300	M+S	E	E	F	67
	185/65R14	86T	8.5	5.5	596	189	530	300	M+S	E	E	F	67
	195/60R14	86H	8.5	6.0	590	201	530	300	M+S	E	E	F	67
15 Inch	185/60R15	84H	8.8	5.5	603	189	500	300	M+S	E	E	F	67
	185/65R15	88T	8.5	5.5	621	189	560	300	M+S	E	E	F	67
	195/55R15	85V	8.8	6.0	595	201	515	300	M+S	E	E	F	67
	195/60R15	88T	8.8	6.0	615	201	560	300	M+S	E	E	F	67
	195/65R15	91T	8.8	6.0	635	201	615	300	M+S	E	E	F	67
	205/65R15	94H	8.8	6.0	647	209	670	300	M+S	E	E	F	67
16 Inch	205/55R16	91T	8.8	6.5	632	214	615	300	M+S	E	E	F	67
	215/55R16	97V XL	8.8	7.0	642	226	730	340	M+S	E	E	F	67
	205/60R16	92T	8.8	6.0	652	209	630	300	M+S	E	E	F	67
	215/60R16	95H	8.8	6.5	664	221	690	300	M+S	E	E	F	67
17 Inch	215/50R17	95VXL	8.8	7.0	648	226	690	340	M+S	E	E	F	67
	225/50R17	98VXL	8.8	7.0	658	233	750	340	M+S	E	E	F	67
	215/55R17	98VXL	8.8	7.0	668	226	750	340	M+S	E	E	F	67

INCH	SIZE	L.I. / S.R	T.D. mm	R.W. inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL. kPa	MUD+SNOW	E-MARK	RR	WG	NOISE
17 Inch	225/55R17	101V XL	8.8	7.0	680	233	825	340	M+S	E	E	F	67
	225/65R17	102T	8.8	6.5	724	228	850	300	M+S	E	E	F	67
	235/55R17	103VXL	8.8	7.5	690	245	875	340	M+S	E	E	F	67
18"	245/45R18	100VXL	8.8	8.0	677	243	800	340	M+S	E	E	F	67
15"	185/55R15	86H XL	8.5	6.0J	585	194	530	340	M+S	E	E	F	67
	195/50R16	88H XL	8.8	6.0J	602	201	560	340	M+S	E	E	F	67
16 Inch	195/55R16	91H XL	8.8	6.0J	620	201	615	340	M+S	E	E	F	67
	225/55R16	90H XL	8.8	7.0J	654	233	775	340	M+S	E	E	F	67
	225/45R17	94V XL	8.8	7.5J	634	225	670	340	M+S	E	E	F	67
17 Inch	235/45R17	97V XL	8.8	8.0J	644	236	730	340	M+S	E	E	F	67
	245/45R17	99V XL	8.8	8.0J	652	243	775	340	M+S	E	E	F	67
	225/45R18	95V XL	8.8	7.5J	659	225	690	340	M+S	E	E	F	67
18 Inch	235/45R18	98V XL	8.8	8.0J	669	236	750	340	M+S	E	E	F	67
	245/50R18	104V XL	8.8	7.5J	703	253	900	340	M+S	E	E	F	67
	255/45R18	103V XL	8.3	8.5J	687	255	775	340	M+S	E	E	F	67
	275/45R18	107V XL	8.8	9.0J	705	273	875	340	M+S	E	E	F	67
19 Inch	225/45R19	96V XL	8.8	7.5J	685	225	975	340	M+S	E	E	F	67
	245/45R19	102V XL	8.8	8.0J	703	243	710	340	M+S	E	E	F	67
	275/40R19	105V XL	8.3	9.5J	703	278	850	340	M+S	E	E	F	67

* Sizes will be released soon



FM806



Features & Benefits

- *Asymmetrical tread design offers even tread wear and great traction both on dry and wet roads*
- *Open transverse groove design improves slush, snow extraction for self-cleaning characteristic*
- *Reinforced blocks greatly improve wet traction and powerful grip performance on ice and snow surfaces*
- *Multi directional high density siping maximizes directional grip on snow and ice, while minimizing road noise*
- *Specialty formulated compounds keeps rubber flexible for maximum performance in extreme cold temperatures*


INCH	SIZE	L.I. / S.R	T.D. mm	R.W inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	MUD+SNOW	E-MARK	RR	WG	NOISE
15 Inch	215/75R15	100T	10.0	6.0	703	216	800	300	M+S	E	E	E	73))
	235/75R15	109TXL	9.0	6.5	733	235	1030	340	M+S	E	E	E	73))
16 Inch	215/65R16	98T	9.6	6.5	686	221	750	300	M+S	E	E	E	73))
	215/70R16	100T	9.6	6.5	708	221	800	300	M+S	E	E	E	73))
	235/60R16	100T	9.6	7.0	688	240	800	300	M+S	E	E	E	73))
	235/70R16	106T	9.6	7.0	736	240	950	300	M+S	E	E	E	73))
17 Inch	215/60R17	98T	9.6	6.5	690	221	710	300	M+S	E	E	E	73))
	225/60R17	99T	9.6	6.5	702	228	775	300	M+S	E	E	E	73))
	235/65R17	100T	9.6	7.0	738	240	800	300	M+S	E	E	E	73))
	265/65R17	112T	9.6	8.0	776	272	1120	300	M+S	E	E	E	73))
18 Inch	215/55R18	95T	9.6	7.0	693	226	690	300	M+S	E	E	E	73))
	225/55R18	98T	9.6	7.0	705	233	750	300	M+S	E	E	E	73))
	235/50R18	97T	9.6	7.5	693	245	730	300	M+S	E	E	E	73))
	235/55R18	100T	9.6	7.5	715	245	800	300	M+S	E	E	E	73))
	235/60R18	107TXL	9.6	7.0	739	240	975	340	M+S	E	E	E	73))
18 Inch	245/60R18	105T	9.6	7.0J	751	248	950	340	M+S	E	E	E	73))
	255/55R18	106T XL	9.6	8.0J	737	265	925	300	M+S	E	E	E	73))
	285/60R18	116T	9.0	8.5J	799	292	1030	340	M+S	E	E	E	73))
19 Inch	235/50R19	103T XL	9.6	7.5J	719	245	775	300	M+S	E	E	E	73))
	235/55R19	105T XL	9.6	7.5J	741	245	875	340	M+S	E	E	E	73))

INCH	SIZE	L.I. / S.R	T.D. mm	R.W inch	O.D. mm	S.W. mm	L.C.C. kg	STD.INFL kPa	MUD+SNOW	E-MARK	RR	WG	NOISE
19 Inch	245/55R19	103T	9.6	7.5J	753	253	925	340	M+S	E	E	E	73))
	255/45R19	104T XL	9.6	8.5J	713	255	875	300	M+S	E	E	E	73))
20 Inch	255/55R19	111T XL	9.6	8.0J	763	265	900	340	M+S	E	E	E	73))
	245/45R20	103T XL	9.6	8.0J	728	243	975	340	M+S	E	E	E	73))
	255/50R20	109T XL	9.6	8.0J	764	265	875	340	M+S	E	E	E	73))
	255/55R20	110T XL	9.6	8.0J	788	265	1080	340	M+S	E	E	E	73))
21"	275/45R21	107T XL	9.6	9.0J	781	273	1080	340	M+S	E	E	E	73))
22"	275/40R22	107T XL	9.0	9.5J	770	278	1150	340	M+S	E	E	E	73))



※ Sizes will be released soon



4 Tyre Rotation

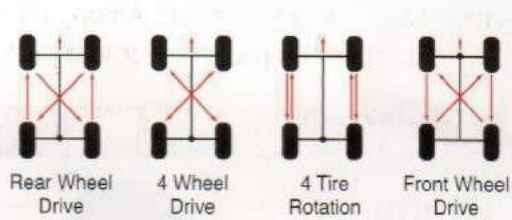

5 Tyre Rotation Utilizing Full Size Spare

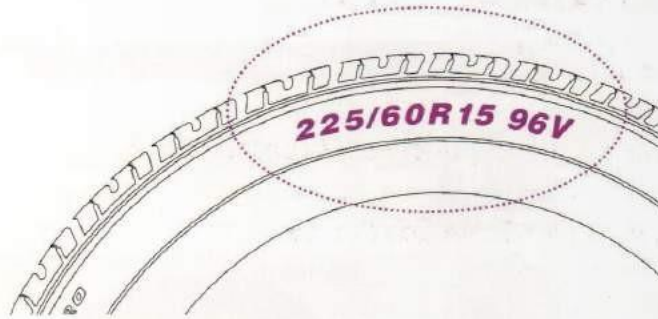

TYRE SIZE DESIGNATION

225 / 60 R 15 96 V



LOAD INDEX TABLE

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
50	190	76	400	102	850	128	1800	154	3750
51	195	77	412	103	875	129	1850	155	3875
52	200	78	425	104	900	130	1900	156	4000
53	206	79	437	105	925	131	1950	157	4125
54	212	80	450	106	950	132	2000	158	4250
55	218	81	462	107	975	133	2060	159	4375
56	224	82	475	108	1000	134	2120	160	4500
57	230	83	487	109	1030	135	2180	161	4625
58	236	84	500	110	1060	136	2240	162	4750
59	243	85	515	111	1090	137	2300	163	4875
60	250	86	530	112	1120	138	2360	164	5000
61	257	87	545	113	1150	139	2430	165	5150
62	265	88	560	114	1180	140	2500	166	5300
63	272	89	580	115	1215	141	2575	167	5450
64	280	90	600	116	1250	142	2650	168	5600
65	290	91	615	117	1285	143	2725	169	5800
66	300	92	630	118	1320	144	2800	170	6000
67	307	93	650	119	1360	145	2900	171	6150
68	315	94	670	120	1400	146	3000	172	6300
69	325	95	690	121	1450	147	3075	173	6500
70	335	96	710	122	1500	148	3150	174	6700
71	345	97	730	123	1550	149	3250	175	6900
72	355	98	750	124	1600	150	3350	176	7100
73	365	99	775	125	1650	151	3450	177	7300
74	375	100	800	126	1700	152	3550	178	7500
75	387	101	825	127	1750	153	3650	179	7750

SPEED SYMBOLS

Important information is molded on the tyre sidewall. Among other information, the sidewall data contains the type size, load range, maximum load and maximum pressure for that particular tyre.

Speed Symbol	A1	A2	A3	A4	A5	A6	A7	A8	B	C	D	E	F	G	J
Max Speed(Km/h)	5	10	15	20	25	30	35	40	50	60	65	70	80	90	100

Speed Symbol	K	L	M	N	P	Q	R	S	T	U	H	V	W	Y	Z
Max Speed(Km/h)	110	120	130	140	150	160	170	180	190	200	210	240	270	300	240+