




ANSU SERIES TIRE CATALOG

Pattern Map



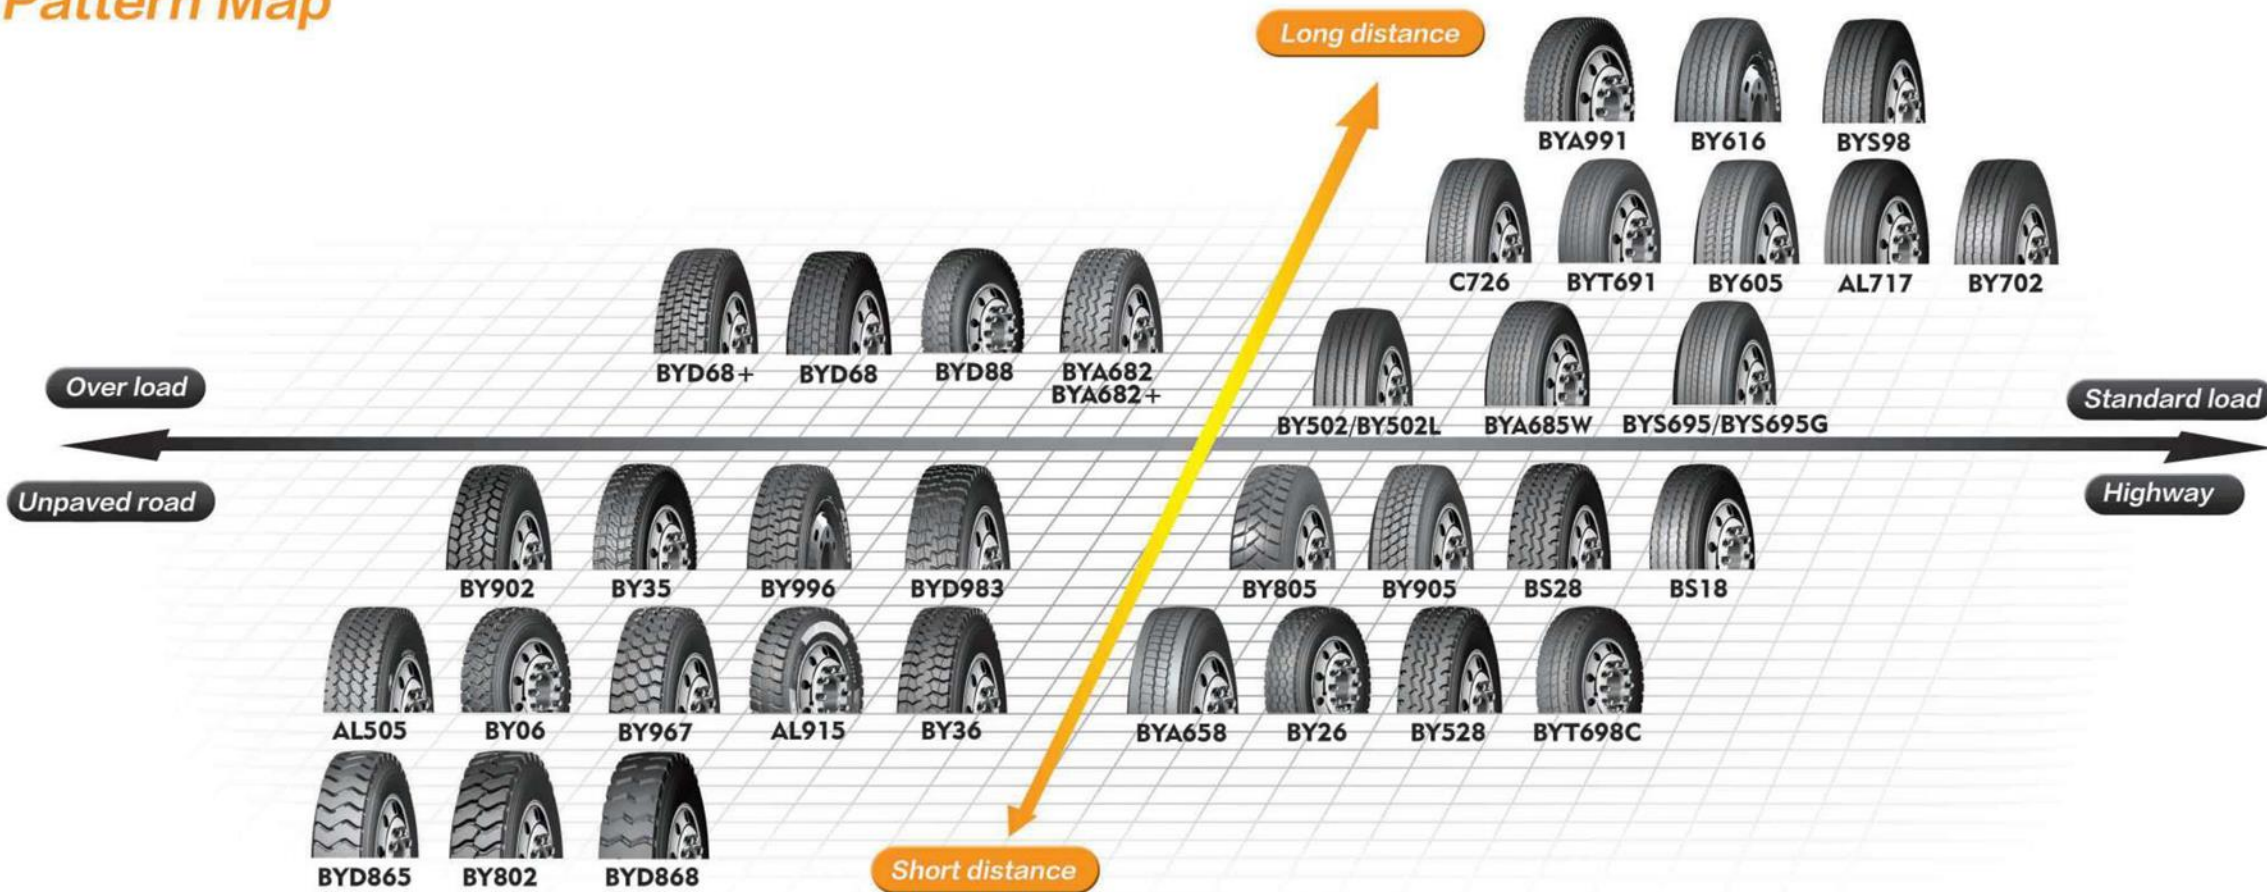

CONTENTS

LONG HAUL

BY616	01
BY996	02
BYA991	03
BY702	04
BYS98	05
AL717	06
BYD68	07
BYD68+	08
BYT691	09
BYS695/BYS695G	10
BYD88	11
BYA682/BYA682+	12
BY605	13
BYD697	14
C726	15
BY905	16
BY805	17
BYA685W	18
BY502/BY502L	19

REGIONAL

BYD983	20
BS18	21
BS28	22
BY528	23
BYT698C	24
BY35	25
BY36	26
BY902	27
AL505	28
AL915	29
BY06	30
BY967	31
BYA658	32

ON&OFF

BY802	33
BYD865	34
BYD888	35



BY616



FEATURES

- ▶ High drainage and wet-slip resistance
- ▶ Low rolling resistance
- ▶ Less non-scale wear

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
215/75R17.5	16	127/124	1750/1600	3860/3525	830	120	M	13.5	6.00	6.75
235/75R17.5	16	132/129	2000/1850	4410/4080	830	120	M	13.5	6.75	7.50



BY996



FEATURES

- ▶ Powerful driving force
- ▶ Stone-proof
- ▶ Low noise
- ▶ Long life-time

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
215/75R17.5	16	127/124	1750/1600	3860/3525	830	120	M	15.5	6.00	6.75
235/75R17.5	16	132/129	2000/1850	4410/4080	830	120	M	15.5	6.75	7.50



BYA991



FEATURES

- ▶ Anti-wear performance
- ▶ Low fuel consumption

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
6.50R16 LT	10	107/102	975/850	2150/1875	560	81	L	10.5	5.50F	5.00E,5.00F
	12	110/105	1060/925	2335/2040	670	97	L			
7.00R16 LT	12	115/110	1215/1060	2680/2335	670	97	L	11.5	5.50F	6.00G
	14	118/114	1320/1180	2910/1600	770	112	L			



BY702



FEATURES

- ▶ Anti-wear performance
- ▶ Low fuel consumption

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
7.50R16LT	12	120/116	1400/1250	3085/2755	670	95	L	12	6.00G	5.00F,6.50H
	14	122/118	1500/1320	3305/2910	770	110	L			



BYS98



FEATURES

- ▶ Long-distance and wear-resistant
- ▶ Excellent handling performance
- ▶ Anti-slide performance
- ▶ High speed performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	17.0	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	17.0	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
13R22.5	16	152/149	3550/3250	7830/7160	760	110	L	18.5	9.75	9.00
	18	154/151	3750/3450	8270/7610	830	120	K			
295/80R22.5	16	150/147	3350/3075	7390/6780	830	120	M	17.0	9.00	8.25
	18	152/149	3550/3250	7830/7160	900	130	K			
315/80R22.5	18	154/151	3750/3450	8270/7610	830	120	K	17.0	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			



AL717



FEATURES

- ▶ Excellent handling performance
- ▶ Anti-slide performance
- ▶ High speed performance
- ▶ Durability

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	17.0	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	17.0	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
13R22.5	16	152/149	3550/3250	7830/7160	760	110	L	18.5	9.75	9.00
	18	154/151	3750/3450	8270/7610	830	120	K			
295/80R22.5	16	150/147	3350/3075	7390/6780	830	120	M	17.0	9.00	8.25
	18	152/149	3550/3250	7830/7160	900	130	K			
315/80R22.5	18	154/151	3750/3450	8270/7610	830	120	K	17.0	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			



BYD68



FEATURES

- ▶ Good driving and braking performance
- ▶ Anti-collapse performance
- ▶ Long life-time
- ▶ Anti-side explosion capacity

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	18.5	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	18.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
13R22.5	16	152/149	3550/3250	7830/7160	760	110	L	19.5	9.75	9.00
	18	154/151	3750/3450	8270/7610	830	120	K			
295/80R22.5	16	150/147	3350/3075	7390/6780	830	120	M	18.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	900	130	K			
315/80R22.5	18	154/151	3750/3450	8270/7610	830	120	K	18.5	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			



BYD68+



FEATURES

- ▶ Good driving and braking performance
- ▶ Low heat generation
- ▶ Long life-time
- ▶ Anti-side explosion capacity

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	18.5	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	18.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
13R22.5	16	152/149	3550/3250	7830/7160	760	110	L	19.5	9.75	9.00
	18	154/151	3750/3450	8270/7610	830	120	K			
295/80R22.5	16	150/147	3350/3075	7390/6780	830	120	M	18.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	900	130	K			
315/80R22.5	18	154/151	3750/3450	8270/7610	830	120	K	18.5	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			



BYT691



FEATURES

- ▶ Excellent handling performance
- ▶ Anti-slide performance
- ▶ Excellent grip performance
- ▶ Low rolling resistance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/75R22.5	14	144/141	2800/2575	6175/5675	760	110	M	10.5	9.00	8.25
	16	146/143	3000/2725	6610/6005	830	120	M			
11R24.5	14	146/143	3000/2725	6610/6005	720	105	M	10.5	8.25	7.50
	16	149/146	3250/3000	7160/6610	830	120	M			
285/75R24.5	14	144/141	2800/2575	6175/5675	760	110	M	10.5	8.25	—
	16	147/144	3075/2800	6780/6175	830	120	M			
11R22.5	14	144/142	2800/2650	6175/5840	720	105	M	10.5	8.25	7.50
	16	146/143	3000/2725	6610/6005	830	120	M			



BYS695/BYS695G



FEATURES

- ▶ Excellent handling performance
- ▶ Anti-slide performance
- ▶ Low rolling resistance
- ▶ Wear-resistant performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/75R22.5	14	144/141	2800/2575	6175/5675	760	110	M	15.5	9.00	8.25
	16	146/143	3000/2725	6610/6005	830	120	M			
11R24.5	14	146/143	3000/2725	6610/6005	720	105	M	15.5	8.25	7.50
	16	149/146	3250/3000	7160/6610	830	120	M			
285/75R24.5	14	144/141	2800/2575	6175/5675	760	110	M	15.5	8.25	—
	16	147/144	3075/2800	6780/6175	830	120	M			
11R22.5	14	144/142	2800/2650	6175/5840	720	105	M	15.5	8.25	7.50
	16	146/143	3000/2725	6610/6005	830	120	M			



BYD88



FEATURES

- ▶ Long-distance special wear-resistant formula
- ▶ Good driving performance
- ▶ Self-cleaning performance
- ▶ Anti-stone performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	18.0	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	18.0	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			



BYA682/BYA682+



FEATURES

- ▶ Oil-saving performance
- ▶ Grip and anti-slide performance
- ▶ Self-cleaning performance
- ▶ Anti-stone performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
12.00R20	18	154/151	3750/3450	8270/7610	830	120	K	16	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			
12.00R24	18	158/155	4250/3875	9370/8540	830	120	K	15.5	8.5	8.50V,9.0
	20	160/157	4500/4125	9920/9090	900	130	K			
315/80R22.5	18	154/151	3750/3450	8270/7610	830	120	K	14.5	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	16.5	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	14.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
13R22.5	16	152/149	3550/3250	7830/7160	760	110	L	15	9.75	9.00
	18	154/151	3750/3450	8270/7610	830	120	K			



BY605



FEATURES

- ▶ High-speed performance
- ▶ Wear-resistance performance
- ▶ Low noise
- ▶ Anti-gravel function

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/75R22.5	14	144/141	2800/2575	6175/5675	760	110	M	10.5	9.00	8.25
	16	146/143	3000/2725	6610/6005	830	120	M			
11R24.5	14	146/143	3000/2725	6610/6005	720	105	M	10.5	8.25	7.50
	16	149/146	3250/3000	7160/6610	830	120	M			
11R22.5	14	144/142	2800/2650	6175/5840	720	105	M	10.5	8.25	7.50
	16	146/143	3000/2725	6610/6005	830	120	M			



BYD697



FEATURES

- ▶ High-speed performance
- ▶ Strong grip ability
- ▶ Powerful driving force
- ▶ Self-cleaning performance
- ▶ Anti-gravel function
- ▶ Low noise

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/75R22.5	14	144/141	2800/2575	6175/5675	760	110	L	20.5	9.00	8.25
	16	146/143	3000/2725	6610/6005	830	120	L			
11R24.5	14	146/143	3000/2725	6610/6005	720	105	L	20.5	8.25	7.50
	16	149/146	3250/3000	7160/6610	830	120	L			
285/75R24.5	14	144/141	2800/2575	6175/5675	760	110	L	20.5	8.25	-
	16	147/144	3075/2800	6780/6175	830	120	L			
11R22.5	14	144/142	2800/2650	6175/5840	720	105	L	20.5	8.25	7.50
	16	146/143	3000/2725	6610/6005	830	120	L			



C726



FEATURES

- ▶ Anti-slide performance
- ▶ Strong grip ability
- ▶ Anti-gravel function

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	15	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			



BY905



FEATURES

- ▶ Strong tractive ability
- ▶ Strong grip ability
- ▶ Wear-resistance performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/75R22.5	14	144/141	2800/2575	6175/5675	760	110	M	20.5	9.00	8.25
	16	146/143	3000/2725	6610/6005	830	120	L			
11R24.5	14	146/143	3000/2725	6610/6005	720	105	L	20.5	8.25	7.50
	16	149/146	3250/3000	7160/6610	830	120	L			
285/75R24.5	14	144/141	2800/2575	6175/5675	760	110	L	20.5	8.25	—
	16	147/144	3075/2800	6780/6175	830	120	L			
11R22.5	14	144/142	2800/2650	6175/5840	720	105	L	20.5	8.25	7.50
	16	146/143	3000/2725	6610/6005	830	120	L			



BY805



FEATURES

- ▶ Excellent driving performance
- ▶ Anti-collapse performance
- ▶ Self-cleaning performance
- ▶ Anti-gravel function

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
295/80R22.5	18	152/149	3550/3250	7830/7160	900	130	G	19	9.00	8.25
315/80R22.5	20	157/154	4125/3750	9090/8270	900	130	K	23	9.00	9.75



BYA685W



FEATURES

- ▶ Low rolling resistance
- ▶ Green fuel saving
- ▶ Wet and slippery resistance and drainage performance
- ▶ Higher mileage

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
385/65R22.5	18	158	4250	9370	830	120	L	15.3	11.75	12.25
	20	160	4500	9920	900	130	K			



BY502/BY502L



FEATURES

- ▶ Anti-slide performance
- ▶ Strong grip ability
- ▶ Low rolling resistance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
315/80R22.5 BY502L	18	154/151	3750/3450	8270/7610	830	120	K	14.5	9.00	9.75
	20	157/154	4125/3750	9090/8270	900	130	K			
385/65R22.5 BY502L	18	158	4250	9370	830	120	L	15.5	11.75	12.25
	20	160	4500	9920	900	130	K			
385/65R22.5 BY502	20	160	4500	9920	900	130	K	16.5	11.75	12.25
	24	164	5000	11000	900	130	K			



BYD983



FEATURES

- ▶ Long mileage
- ▶ Excellent driving performance
- ▶ Self - cleaning performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
7.00R16 LT	12	115/110	1215/1060	2680/2335	670	97	L	16	5.50F	6.00G
	14	118/114	1320/1180	2910/1600	770	112	L			



BS18



FEATURES

- ▶ High strength tire body prolong the life of the tire
- ▶ Shoulder slotting design reduces heat generation during driving

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
7.50R16LT	12	120/116	1400/1250	3085/2755	670	95	L	12.0	6.00G	5.00F,6.50H
	14	122/118	1500/1320	3305/2910	770	110	L			
10.00R20	16	146/143	3000/2725	6610/6005	830	120	K	16.0	7.5	7.50V,8.0
	18	149/146	3250/3000	7160/6610	930	135	K			
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	16.5	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	16	152/149	3550/3250	7830/7160	760	110	K	17.0	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			



BS28



FEATURES

- ▶ High strength tire body prolong the life of the tire
- ▶ Shoulder slotting design reduces heat generation during driving

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
7.50R16LT	12	120/116	1400/1250	3085/2755	670	95	L	12.0	6.00G	5.50F,6.50H
	14	122/118	1500/1320	3305/2910	770	110	L			
8.25R16LT	14	126/122	1700/1500	3750/3305	670	95	L	13	6.50H	6.00G,6.5
	16	128/124	1800/1600	3970/3525	770	110	L			
8.25R20	14	136/134	2240/2120	4940/4675	830	120	K	15.3	6.5	6.50T,7.0,7.00T
	16	139/137	2430/2300	5360/5070	930	135	K			
9.00R20	14	141/139	2575/2430	5675/5355	790	115	K	15.5	7.0	7.5,7.00T
	16	144/142	2800/2650	6175/5840	900	130	K			
10.00R20	16	146/143	3000/2725	6610/6005	830	120	K	16.5	7.5	7.50V,8.0
	18	149/146	3250/3000	7160/6610	930	135	K			
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	17.0	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	K	17.5	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			
12.00R24	18	158/155	4250/3875	9370/8540	830	120	K	15.5	8.5	8.50V,9.0
	20	160/157	4500/4125	9920/9090	900	130	K			
11R22.5	16	146/143	3000/2725	6610/6005	830	120	M	14.5	8.25	7.50
	18	151/148	3450/3150	7610/6940	930	135	K			



BY528



FEATURES

- ▶ High-speed performance
- ▶ Anti-slide performance
- ▶ Low rolling resistance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
6.50R16 LT	10	107/102	975/850	2150/1875	560	81	L	10.5	5.50F	5.00E,5.00F
	12	110/105	1060/925	2335/2040	670	97	L			
7.00R16 LT	12	115/110	1215/1060	2680/2335	670	97	L	11.5	5.50F	6.00G
	14	118/114	1320/1180	2910/1600	770	112	L			



BYT698C



FEATURES

- ▶ High-speed performance
- ▶ Anti-slide performance
- ▶ Low rolling resistance
- ▶ Long life-time

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	16.5	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	K	17	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			



BY35



FEATURES

- ▶ Anti-overload and anti-burst ability
- ▶ Long life-time
- ▶ Excellent driving performance
- ▶ Anti-tearing formula
- ▶ Anti-collapse performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
7.50R16LT	12	120/116	1400/1250	3085/2755	670	95	L	14.5	6.00G	5.50F,6.50H
	14	122/118	1500/1320	3305/2910	770	110	L			
8.25R16LT	14	126/122	1700/1500	3750/3305	670	95	L	15	6.50H	6.00G,6.5
	16	128/124	1800/1600	3970/3525	770	110	L			
8.25R20	14	136/134	2240/2120	4940/4675	830	120	K	16.5	6.5	6.50T,7.0,7.00T
	16	139/137	2430/2300	5360/5070	930	135	K			
9.00R20	14	141/139	2575/2430	5675/5355	790	115	K	17.5	7.0	7.5, 7.00T
	16	144/142	2800/2650	6175/5840	900	130	K			
10.00R20	16	146/143	3000/2725	6610/6005	830	120	K	18.5	7.5	7.50V,8.0
	18	149/146	3250/3000	7160/6610	930	135	K			
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	20.0	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	16	152/149	3550/3250	7830/7160	760	110	K	21.0	8.5	8.50V,9.0
	18	154/151	3750/3450	8270/7610	830	120	J			
12R22.5	20	156/153	4000/3650	8820/8050	900	130	G	20.5	9.00	8.25
	16	150/147	3350/3075	7390/6780	830	120	M			
315/80R22.5	18	152/149	3550/3250	7830/7160	930	135	K	20.5	9.00	9.75
	18	152/149	3550/3250	7830/7160	930	135	J			
12.00R24	18	154/151	3750/3450	8270/7610	830	120	K	18	8.5	8.50V,9.0
	20	157/154	4125/3750	9090/8270	900	130	K			
	18	158/155	4250/3875	9370/8540	830	120	K			
	20	160/157	4500/4125	9920/9090	900	130	K			



BY36



FEATURES

- ▶ Excellent traction and braking
- ▶ Wet skid resistance performance
- ▶ Excellent load performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	19	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	J	19	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	G			



BY902



FEATURES

- ▶ Excellent traction performance
- ▶ Braking and anti-slippery performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
8.25R16LT	14	126/122	1700/1500	3750/3305	670	95	L	16	6.50H	6.00G,6.5
	16	128/124	1800/1600	3970/3525	770	110	L			



AL505



FEATURES

- ▶ Excellent driving performance
- ▶ Anti-collapse performance
- ▶ Long life-time

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
12.00R20	18	154/151	3750/3450	8270/7610	830	120	K	17.5	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			



AL915



FEATURES

- ▶ Super wide driving surface
- ▶ High wear resistance
- ▶ Stronger carrying capacity
- ▶ Tread design with puncture

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
9.00R20	14	141/139	2575/2430	5675/5355	790	115	J	19.5	7.0	7.5, 7.00T
	16	144/142	2800/2650	6175/5840	900	130				



BY06



FEATURES

- ▶ Anti-overload and anti-burst ability
- ▶ Excellent driving performance
- ▶ Anti-collapse performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
10.00R20	16	146/143	3000/2725	6610/6005	830	120	G	18.0	7.5	7.50V,8.0
	18	149/146	3250/3000	7160/6610	930	135	G			
11.00R20	16	150/147	3350/3075	7390/6780	830	120	G	20.5	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	G			
12.00R20	16	152/149	3550/3250	7830/7160	760	110	G	22.5	8.5	8.50V,9.0
	18	154/151	3750/3450	8270/7610	830	120	G			
	20	156/153	4000/3650	8820/8050	900	130	G			
12R22.5	18	152/149	3550/3250	7830/7160	930	135	G	20.5	9.00	8.25



BY967



FEATURES

- ▶ Excellent traction and braking performance
- ▶ Wet skid resistance performance
- ▶ Suitable for short-distance transportation

SIZE	PR	LOAD INDEX	MAX/LOAD (kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11.00R20	16	150/147	3350/3075	7390/6780	830	120	K	19	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	K	19.5	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	K			



BYA658



FEATURES

- ▶ Strong grip ability
- ▶ Anti-slide performance
- ▶ Four layer belt structure

SIZE	PR	LOAD INDEX	MAX/LOAD (kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
12R22.5	16	150/147	3350/3075	7390/6780	830	120	M	16.5	9.00	8.25
	18	152/149	3550/3250	7830/7160	930	135	K			
12.00R24	18	158/155	4250/3875	9370/8540	830	120	K	15.5	8.5	8.50V,9.0
	20	160/157	4500/4125	9920/9090	900	130	K			



BY802



FEATURES

- ▶ Anti-collapse performance
- ▶ Excellent driving performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (Kg)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
8.25R16LT	14	126/122	1700/1500	3750/3305	670	95	F	17.5	6.50H	6.00G,6.5
	16	128/124	1800/1600	3970/3525	770	110	F			



BYD865



FEATURES

- ▶ Anti-overload and anti-burst ability
- ▶ Long life-time
- ▶ Excellent driving performance
- ▶ Special mine formula
- ▶ Anti-collapse performance

SIZE	PR	LOAD INDEX	MAX/LOAD (Kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11.00R20	16	150/147	3350/3075	7390/6780	830	120	F	24.5	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	F			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	F	24.5	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	F			



BYD868



FEATURES

- ▶ Excellent driving performance
- ▶ Anti-collapse performance
- ▶ Long life-time

SIZE	PR	LOAD INDEX	MAX/LOAD (kg)	BRITISH SYSTEM MAX/LOAD (LBS)	PRESSURE (Kpa)	BRITISH SYSTEM PRESSURE (PSI)	SPEED RATE	TREAD DEPTH (mm)	STANDARD RIM	ALTERNATIVE RIM
11.00R20	16	150/147	3350/3075	7390/6780	830	120	F	24.5	8.0	8.00V,8.5
	18	152/149	3550/3250	7830/7160	930	135	F			
12.00R20	18	154/151	3750/3450	8270/7610	830	120	F	24.5	8.5	8.50V,9.0
	20	156/153	4000/3650	8820/8050	900	130	F			

Type of Operation

Long Haul



Regional



On&off



