



# Contents

## ARDENT TIRE

### • ARDENT Qualifications

#### Touring Performance

TOUR RX1 ..... 1-2

#### High Performance

HP RX3 ..... 3-4

TAXI RX328 ..... 5

#### Commercial Light Truck

RX501 ..... 6

VAN RX5 ..... 7-8

RX566 ..... 9-10

#### Ultra High Performance

SPORT RX6 ..... 11-12

#### SUV/Light Truck

SUV RX702 ..... 13-14

SUV RX706 ..... 15-16

LT RX718,RX728 ..... 17-18

#### Mud Tire

MT200 ..... 19-20

#### Winter Tire

WINTER RX808 ..... 21-22

WINTER RX818 ..... 23-24

WINTER RX821 ..... 25-26

WINTER RX826 ..... 27-28

RX828 ..... 27-28

#### Trailer Tire

ST100 ..... 29-30



## TOUR RX1

- Optimized pitch design effectively reduces tire noise.
- Anti-slip sipe improves driving stability and braking performance on wet road.
- Streamline transversal grooves ensure safe handling and high speed stability.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
145/70R12	69	T	4.50B	150	509	325	716	300	44	6.1
155/65R13	73	T	4.50B	157	532	365	805	300	44	7.3
155/70R13	75	T	4.50B	157	548	387	853	300	44	7.3
155/80R13	79	T	4.50B	157	578	437	963	300	44	7.3
165/65R13	77	T	5J	170	544	412	908	300	44	7.6
165/70R13	79	T	5.00B	170	562	437	963	300	44	7.6
165/80R13	83	T	4.50B	165	594	487	1074	300	44	7.8
175/60R13	77	H	5J	177	540	412	908	300	44	7.3
175/70R13	82	T/H	5.00B	177	576	475	1047	300	44	7.8
185/70R13	86	T	5.50B	189	590	530	1168	300	44	7.8
165/70R14	81	T	5J	170	588	462	1019	300	44	7.6
175/65R14	82	H	5J	177	584	475	1047	300	44	7.8
175/65R14	86 XL	T	5J	177	584	530	1168	340	51	7.8
175/70R14	84	H	5J	177	602	500	1102	300	44	7.8
175/70R14	88 XL	T	51/2J	177	602	560	1235	340	51	7.8
185/70R14	88	H	51/2J	189	616	560	1235	300	44	7.8

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
155R12C	83/81	Q	6PR	4.50B	157	550	487	1075	462	1020	350	51	7.6
155R12C	88/86	Q	8PR	4.50B	157	550	487	1075	462	1020	350	51	7.6



Comfort



Safety



Drainage



## High Performance

PASSION FOR PERFECTION



## HP RX3

- Four grooves with open shoulder provides perfect water evacuation.
- Center rib design delivers better straight handling.
- Improved shoulder sipes provide better handling during cornering and low noise emission.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
175/70R12	80	T	5.00B	177	551	450	992	300	44	7.0
175/65R13*	80	T	5J	177	558	475	1047	300	44	7.8
155/65R14*	79 XL	T	4 1/2J	157	558	437	963	340	50	7.3
165/60R14	75	T	5J	170	554	387	853	300	44	7.8
165/65R14*	79	T	5J	170	570	437	963	300	44	7.6
185/55R14*	80	V/H	6J	194	560	450	992	300	44	7.8
185/60R14	82	H	5 1/2J	189	578	475	1047	300	44	7.8
185/65R14	86	H	5 1/2J	189	596	530	1168	300	44	7.8
195/60R14	86	H	6J	201	590	530	1168	300	44	7.8
195/70R14	91	H	6J	201	630	615	1356	300	44	7.8
205/60R14	88	V	6J	205	602	560	1235	300	44	7.8
205/70R14	98 XL	H/V	6J	209	644	750	1653	340	51	7.8
185/55R15	82	V	6J	194	585	475	1047	300	44	7.8
185/60R15	84	H	5 1/2J	189	603	500	1102	300	44	7.8
185/65R15	88	H	5 1/2J	189	621	560	1235	300	44	7.8
185/65R15	92 XL	T	5 1/2J	189	621	630	1389	340	50	7.8
195/50R15	82	V	6J	201	577	475	1047	300	44	7.8
195/55R15	85	V	6J	201	595	515	1135	300	44	7.8
195/60R15	88	H/V	6J	201	615	560	1235	300	44	7.8
195/65R15	91	H/V	6J	201	635	615	1356	300	44	7.8
195/65R15	95 XL	H	6J	201	635	690	1521	340	50	7.8
205/60R15	91	H/V	6J	209	627	615	1356	300	44	7.8
205/65R15	94	H/V	6J	209	647	670	1477	300	44	7.8
205/70R15*	96	H	6J	209	669	710	1565	300	44	7.8
P215/75R15	101	H/V	6J	216	703	825	1819	300	44	7.8
P215/75R15	100	H	6J	216	703	790	1742	300	44	7.8
P225/75R15	104	H/V	6J	223	719	900	1984	300	44	7.8
205/55R16	91	V	6 1/2J	214	632	615	1356	300	44	7.8
205/60R16	92	H/V	6J	209	652	630	1389	300	44	7.8
205/60R16	96 XL	V	6J	209	652	710	1565	340	51	7.8
215/60R16	95	H/V	6 1/2J	221	664	690	1521	300	44	7.8
215/60R16	99 XL	V	6 1/2J	221	664	775	1709	340	51	7.8
215/65R16	98	H/V	6 1/2J	221	686	750	1653	300	44	7.8
225/60R16	98	H/V	6 1/2J	228	676	750	1653	300	44	7.8

The Size With \* Can Not Be Produced Now.



Long Mileage



Handling



Braking



Drainage

**TAXI RX328**



**RX501**

**RX328**

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
165/70R13	79	T	5.00B	170	562	437	963	300	44	8.7
175/70R14	84	T	5.00B	177	602	500	1102	300	44	8.7
185/60R14	82	H	5 1/2J	189	578	475	1047	300	44	8.7
195/60R14	86	H	6J	201	590	530	1168	300	44	8.7
185/65R15	88	H	5 1/2J	189	621	560	1235	300	44	8.7
195/60R15	88	H	6J	201	615	560	1235	300	44	8.7
195/65R15	91	H	6J	201	635	615	1356	300	44	8.7

**RX501**

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
155R13C	90/88	N	8PR	4.50B	157	578	600	1323	565	1245	450	65	8.0
165R13C	94/93	N	8PR	4 1/2J	165	594	670	1475	650	1435	450	65	8.0
165/70R13(LT)(C)	88/86	T	6PR	5J	170	562	560	1235	530	1170	375	54	8.0
175R13C	97/95	Q	8PR	5.00B	177	610	730	1609	690	1521	450	65	8.0
165/70R14LT	89/87	R	6PR	5J	170	586	580	1280	545	1200	375	54	8.0



SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
175/70R14LT	95/93	R	6PR	5J	177	602	690	1520	650	1435	375	54	8
185R14C	102/100	Q	8PR	51/2J	188	650	850	1874	800	1764	450	65	8.4
185R14C	104	N	-	51/2J	188	650	850	1874	800	1764	450	65	8.4
195R14C	106/104	Q	8PR	51/2J	198	666	950	2094	900	1984	450	65	8.7
195R15C	106/104	Q	8PR	51/2J	198	690	950	2094	900	1984	450	65	8.7
195/70R15C	104/102	R	8PR	6J	201	655	900	1984	850	1874	450	65	10.2
205/70R15C	106/104	R	8PR	6J	209	669	950	2094	900	1984	450	65	10.2
215/70R15C*	109/107	S	8PR	61/2J	221	683	1030	2270	975	2150	450	65	9.7
215/75R15LT	100/97	N	6PR	6J	216	703	800	1765	730	1610	350	50	9.7
225/70R15C	112/110	R	8PR	61/2J	228	697	1120	2469	1060	2337	475	65	10.2
185/75R16C	104/102	R	8PR	5J	184	684	900	1984	850	1874	475	68	8.4
195/65R16C	104/102	R	8PR	6J	201	660	900	1984	850	1874	475	68	9.7
195/75R16C	107/105	R	8PR	51/2J	196	698	975	2149	925	2039	475	68	8.7
205/65R16C	107/105	R	8PR	6J	209	672	975	2149	925	2039	475	68	9.7
215/65R16C	109/107	R	8PR	61/2J	221	686	1030	2271	975	2149	475	68	9.7
215/70R16LT	104/102	N	8PR	61/2J	221	708	900	1984	850	1874	450	65	9.7
215/70R16LT	100/97	N	6PR	61/2J	221	708	800	1764	730	1610	350	50	9.7
215/70R16LT	106/104	N	10PR	61/2J	221	708	950	2094	900	1984	550	80	9.7
215/70R16LT	108/106	T	8PR	61/2J	221	708	1000	2205	950	2094	450	65	9.7
215/75R16C	116/114	R	10PR	6J	216	728	1250	2756	1180	2601	525	76	9.7
225/65R16C	112/110	R	8PR	61/2J	228	698	1120	2469	1060	2337	475	68	9.7
235/65R16C	115/113	R	8PR	7J	240	712	1215	2679	1150	2535	475	68	9.7

The Size With \* Can Not Be Produced Now.



Handling



Braking

# VAN RX5



- Special compound design ensures a long mileage.
- The combination of blocks provides a superior driving performance and a strong grip.
- Three main grooves contribute to better water drainage and wet traction.





SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
6.00R13LT	93/89	P	8PR	4.50B	164	650	650	1435	580	1280	415	60	8.2
6.00R14LT	95/90	P	8PR	4.1/2J	158	626	690	1521	600	1325	415	60	8.2
6.00R15LT	97/92	P	8PR	4.50E	170	705	730	1610	630	1390	415	60	8.2
6.50R16LT	107/102	M	10PR	5.50F	185	750	975	2150	850	1875	560	81	9.7
7.00R16LT	109/107	M	8PR	5.50F	198	778	1025	2260	980	2160	450	65	10.7
7.00R16LT	113/111	M	10PR	5.50F	198	778	1130	2490	1075	2370	525	76	10.7
7.00R16LT	117/116	N	12PR	5.50F	198	778	1285	2835	1250	2755	670	97	10.7
7.50R16LT	123/121	M	14PR	6.00G	215	805	1510	3330	1440	3175	700	102	10.7

# KARRIER RX566

- Suitable for various light-load goods vehicles.
- Excellent traction, braking and steering performance combined with good water dispersion and self-cleaning ability.



# Ultra High Performance

PASSION FOR PERFECTION



## SPORT RX6

- Special asymmetric pattern design provides excellent high speed and handling performance.
- Spiral groove design contributes to outstanding water evacuation and wet grip.
- Special compound design reduces heat generation and enhances grip performance under all road conditions.



Handling



Braking



Drainage

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
175/50R16	77	V	51/2J	182	582	412	908	300	44	7.8
185/50R16	81	V	6J	194	592	462	1019	300	44	7.8
195/45R16*	84XL	V/W	61/2J	195	582	500	1102	340	50	7.8
195/50R16	88XL	V	6J	201	602	560	1235	340	50	7.8
195/55ZR16	87/91	W/H	6J	201	620	545	1201	300	44	7.8
195/60R16	89	H	6J	201	640	580	1279	300	44	7.8
205/45ZR16	87XL	W	7J	206	590	545	1201	340	50	7.8
205/50R16	87	W	61/2J	214	612	545	1201	300	44	7.8
205/55R16	91	W	61/2J	214	632	615	1366	300	44	7.8
205/55R16	94XL	W/V	61/2J	214	632	670	1477	340	50	7.8
215/55R16	97XL	W	7J	226	642	730	1609	340	50	7.8
225/50R16	96XL	W	7J	233	632	710	1565	340	50	7.8
225/55R16	99XL	W	7J	233	654	775	1709	340	50	7.8
195/40ZR17	81XL	W	7J	200	588	462	1019	340	50	7.8
195/45ZR17	85XL	W	61/2J	195	608	515	1135	340	50	7.8
205/40R17	84XL	W	71/2J	212	596	500	1102	340	50	7.8
205/45R17	88XL	W	7J	206	616	560	1235	340	50	7.8
205/50R17	93XL	W	61/2J	214	638	650	1433	340	50	7.8
215/40R17	87XL	W	71/2J	218	604	545	1201	340	50	7.8
215/45R17	91XL	W	7J	213	626	615	1356	340	50	7.8
215/45R17	87	W	7J	213	626	545	1201	300	44	7.8
215/60ZR17	95XL	W	7J	226	648	690	1521	340	50	7.8
215/55R17	98XL	W/V	7J	226	668	750	1653	340	50	7.8
225/45R17	94XL	W	71/2J	225	634	670	1477	340	50	7.8
225/50ZR17	98XL	W	7J	233	658	750	1653	340	50	7.8
225/55R17	101XL	W	7J	233	680	825	1819	340	50	7.8
235/45R17	97XL	W	8J	236	644	730	1609	340	50	7.8
235/55R17	103XL	W	71/2J	245	690	875	1929	340	50	7.8
245/45ZR17	99XL	W	8J	243	652	775	1709	340	50	7.8
215/35R18	84XL	W	71/2J	218	607	500	1102	340	50	7.8
215/40ZR18	85	W/Y	71/2J	218	629	515	1135	300	44	7.8
215/45ZR18	89	W/Y	7J	213	651	580	1279	300	44	7.8
225/40R18	92XL	W	8J	230	637	630	1389	340	50	7.8
225/45ZR18	95XL	W	71/2J	225	659	690	1521	340	50	7.8
235/40R18	95XL	W	81/2J	241	645	690	1521	340	50	7.8
235/45ZR18	98XL	Y	8J	236	669	750	1653	340	50	7.8
235/50ZR18	101XL	Y	71/2J	245	693	825	1819	340	50	7.8
235/55R18	104XL	V	71/2J	245	715	900	1964	340	49	7.8
245/40ZR18	97XL	W	81/2J	248	653	730	1609	340	50	7.8
245/45ZR18	100XL	W	8J	243	677	800	1764	340	50	7.8
245/50ZR18	100	W/Y	71/2J	253	703	800	1764	300	44	7.8
255/35ZR18	94XL	W	9J	260	635	670	1477	340	50	7.8
265/35ZR18	93	W	91/2J	271	643	650	1433	300	44	7.8
225/35ZR19	84	W	8J	230	641	500	1102	300	44	7.8
235/35ZR19	91XL	W/Y	81/2J	241	647	615	1366	340	50	7.8
245/35ZR19	93XL	W	81/2J	248	655	650	1433	340	50	7.8
245/40ZR19	98XL	W	81/2J	248	679	750	1653	340	50	7.8
245/45ZR19	98	W/Y	8J	243	703	750	1653	300	44	7.8
265/30ZR19	93XL	W	91/2J	271	643	650	1433	340	50	7.8
275/40R19*	105XL	W	91/2J	278	703	925	2039	340	50	7.8
225/35ZR20	90XL	W	8J	230	666	600	1323	340	50	7.8
225/35ZR20	93XL	W	8J	230	666	650	1433	340	50	7.8
245/40ZR20	95	W	81/2J	248	704	690	1521	300	44	7.8
245/45ZR20	99	W	8J	243	728	775	1709	300	44	7.8
275/30ZR20	93	W	91/2J	278	674	650	1433	300	44	7.8
275/35ZR20	98	W	91/2J	278	700	750	1653	300	44	7.8
275/40ZR20	106XL	Y	91/2J	278	728	950	2094	340	50	7.8
275/45ZR20	110XL	Y	9J	273	756	1060	2337	340	50	7.8
275/55R20	117XL	V	81/2J	284	810	1285	2833	340	50	7.8
245/30ZR22	92XL	W	81/2J	248	707	630	1389	340	50	7.8
245/35ZR22	97XL	W	81/2J	248	731	730	1609	340	50	7.8
285/45R22*	114XL	W	91/2J	285	815	1180	2601	340	50	7.8
305/40ZR22	114XL	W	11J	313	803	1180	2601	340	50	7.8

The Size With \* Can Not Be Produced Now.



## SUV RX702

- Optimized tread formula ensures excellent skid resistance on wet roads, and low rolling resistance on dry roads.
- Streamline transversal grooves ensure good wet traction and superior water evacuation.
- The designed pattern blocks ensure the driving power on various road surfaces.



SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
205/70R15	96	H	6J	209	669	710	1565	300	44	7.8
255/70R15	108	H	71/2J	260	739	1000	2204	300	44	7.8
215/65R16	98	H	61/2J	221	686	750	1653	300	44	7.8
235/60R16	100	H	7J	240	688	800	1764	300	44	7.8
245/70R16	107	H	7J	248	750	975	2149	300	44	7.8
265/70R16	112	H	8J	272	778	1120	2469	300	44	7.8
275/70R16	114	H	8J	279	792	1180	2601	300	44	7.8
215/60R17	96	H	61/2J	221	690	710	1565	300	44	8.0
225/60R17	99	V	61/2J	228	702	775	1709	300	44	7.8
225/65R17	102	V	61/2J	228	724	850	1874	300	44	7.8
235/55R17	99	H	71/2J	245	690	775	1709	300	44	7.8
235/60R17	102	V	7J	240	714	850	1874	300	44	7.8
235/65R17	104	V	7J	240	738	900	1984	300	44	7.8
245/65R17	107	H	7J	248	750	975	2149	300	44	7.8
265/65R17	112	H	8J	272	776	1120	2469	300	44	7.8
275/55R17	109	V	81/2J	284	734	1030	2271	300	44	7.8
275/65R17	115	H	8J	279	790	1215	2679	300	44	7.8
285/65R17	116	H	81/2J	292	802	1250	2756	300	44	7.8
215/55R18	95	V	7J	226	693	690	1521	300	44	7.8
235/55ZR18	104XL	W	71/2J	245	715	900	1984	340	50	7.8
235/60R18	107XL	V	7J	240	739	975	2149	340	50	7.8
255/55ZR18	109XL	W	8J	265	737	1030	2271	340	50	7.8
255/60R18	112XL	V	71/2J	260	763	1120	2469	340	50	7.8
245/55ZR19	103	W	71/2J	253	753	875	1929	300	44	7.8
255/50ZR19	107XL	W/Y	8J	265	739	975	2149	340	50	7.8
255/55ZR19	111XL	W	8J	265	763	1090	2403	340	50	7.8
245/35ZR20	95XL	W/Y	81/2J	248	680	690	1521	340	50	7.8
255/35ZR20	97XL	W/Y	9J	260	686	730	1609	340	50	7.8



Safety



Handling



Braking



Long Mileage



## SUV/Light Truck

PASSION FOR PERFECTION



## SUV RX706

- Wide-angle lateral grooves ensure excellent on-and-off road performance.
- Unique pattern design reduces noise generation, improves driving stability and wet grip performance.
- Optimized tread compound contributes to good durability, good driving comfort, high traction on both dry and wet grounds.



SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
31 x 10.50R15LT	109	S	6PR	81/2J	268	775	1030	2270	-	-	350	50	10.5
235/75R15	109 XL	T	-	61/2J	235	733	1030	2271	-	-	340	50	8.2
LT215/85R16	115/112	S	10PR	6J	216	772	1215	2680	1120	2470	550	80	10.5
LT225/75R16	115/112	S	10PR	6J	223	744	1215	2680	1120	2470	550	80	10.5
P235/70R16	104	T	-	7J	240	736	900	1984	-	-	300	44	8.2
235/70R16	106	T	-	7J	240	736	950	2094	-	-	300	44	8.2
LT235/85R16	120/116	S	10PR	61/2J	235	806	1380	3042	1260	2778	550	80	10.5
LT245/75R16	120/116	S	10PR	7J	248	774	1380	3042	1260	2778	550	80	10.5
LT265/75R16	123/120	S	10PR	71/2	267	804	1550	3415	1400	3085	550	80	10.5
LT285/75R16	122/119	S	8PR	8J	286	834	1500	3305	1360	3000	450	65	10.5
LT305/70R16	118/115	S	8PR	9J	311	834	1320	2910	1215	2680	350	50	10.5
P235/65R17	103	T	-	7J	240	738	875	1929	-	-	300	44	8.2
235/65R17	104	T	-	7J	240	738	900	1984	-	-	300	44	8.2
LT265/70R17	121/118	S	10PR	8J	272	804	1450	3195	1320	2910	550	80	10.5
LT315/70R17	121/118	S	8PR	91/2J	323	874	1450	3195	1320	2910	350	50	10.5



Handling



Braking



Long Mileage

## HT RX718



## AT RX728



### RX718

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
LT215/85R16	115/112	S	10PR	6J	216	772	1215	2680	1120	2470	550	80	10.5
LT225/75R16	115/112	S	10PR	6J	223	744	1215	2680	1120	2470	550	80	10.5
LT235/85R16	120/116	S	10PR	6 1/2J	235	806	1380	3042	1260	2778	550	80	10.5
LT245/75R16	120/116	S	10PR	7J	248	774	1380	3042	1260	2778	550	80	10.5
LT265/75R16	123/120	S	10PR	7 1/2	267	804	1550	3415	1400	3085	550	80	10.5

### RX728

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
LT215/75R15	100/97	S	6PR	6J	216	703	800	1765	730	1630	350	50	11.6
LT235/75R15	116/113	S	10PR	6 1/2J	235	733	1250	2755	1150	2535	550	80	13.1

## Mud Tire

PASSION FOR PERFECTION



# MT 200

- Especially designed for unpaved tough roads.
- Various shoulder blocks promote driving and handling performance on tough roads.
- Perfect grip on tough surfaces such as mud and sand.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
31x10.50R15LT	109	Q	6PR	81/2J	268	775	1030	2270	-	-	350	50	14.6
33x12.50R15LT	108	Q	6PR	10J	318	826	1000	2205	-	-	250	35	14.6
LT235/75R16	117/114	Q	10PR	81/2J	235	758	1285	2835	1180	2600	550	80	14.6
LT235/85R16	120/116	N	10PR	81/2J	235	806	1380	3042	1260	2778	550	80	14.6
LT245/75R16	120/116	N	10PR	7J	248	774	1380	3042	1260	2778	550	80	14.6
LT265/75R16	123/120	N	10PR	71/2J	267	804	1550	3415	1400	3085	550	80	14.6
LT285/75R16	122/119	Q	8PR	8J	286	834	1500	3305	1360	3000	450	65	14.6
LT265/70R17	121/118	Q	10PR	8J	272	804	1450	3195	1320	2910	550	80	14.6
LT285/70R17	121/118	Q	8PR	81/2J	292	832	1450	3195	1320	2910	450	65	14.6
35x12.50R17LT	119	Q	8PR	10J	318	877	1360	3000	-	-	350	50	14.6
LT275/70R18	125/122	Q	10PR	8J	279	843	1650	3640	1500	3305	550	80	14.6
35x12.50R18LT	123	Q	10PR	10J	318	877	1550	3415	-	-	450	65	14.6
35x12.50R20LT	121	Q	10PR	10J	318	877	1450	3195	-	-	450	65	14.6



Braking



Drainage



## Winter Tire

PASSION FOR PERFECTION



# WINTER RX808

- Two wide main grooves and wide tread design ensures a superior handling performance on ice and snow ground.
- Sawtooth-shaped design on the tread guarantees excellent braking performance on ice and snow.
- Advanced silica compound offers enhanced traction and balance in winter driving conditions.
- Directional, v-shaped tread pattern improves water evacuation and enhances winter traction.



Handling



Braking

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
165/70R13	79	T	5.00B	170	562	437	963	300	44	8.0
175/70R13	82	T	5.00B	177	576	475	1047	300	44	8.1
175/65R14	82	T	5J	177	584	475	1047	300	44	8.1
175/65R14	86XL	T	5J	177	584	530	1168	340	50	8.1
185/60R14	82	T/H	51/2J	189	578	475	1047	300	44	8.2
185/65R14	90XL	T/H	51/2J	189	596	600	1323	340	50	8.2
185/70R14	88	T	51/2J	189	616	560	1235	300	44	8.2
185/65R15	88	T/H	51/2J	189	621	560	1235	300	44	8.2
195/55R15	85	T	6J	201	595	515	1135	300	44	8.3
195/60R15	88	T/H	6J	201	615	560	1235	300	44	8.3
195/65R15	91	T/H	6J	201	635	615	1356	300	44	8.3
205/65R15	94	T	6J	209	647	670	1477	300	44	8.4
205/70R15	96	T	6J	209	669	710	1565	300	44	8.4
215/70R15	98	T	61/2J	221	683	750	1653	300	44	8.5
215/75R15	100	T	6J	216	703	800	1764	300	44	8.5
205/55R16	91	T/H	61/2J	214	632	615	1356	300	44	8.4
205/55R16	94XL	T/H	61/2J	214	632	670	1477	340	50	8.4
215/55R16	93	T/H	7J	226	642	650	1433	300	44	8.5
215/55R16	97XL	T/V	7J	226	642	730	1609	340	50	8.5
215/60R16	95	T/H	61/2J	221	664	690	1521	300	44	8.5
215/60R16	99XL	T/H	61/2J	221	664	775	1709	340	50	8.5
215/65R16	98	T/H	61/2J	221	686	750	1653	300	44	8.5
215/70R16	100	T/H	61/2J	221	708	800	1764	300	44	8.5
225/60R16	102XL	T/H	61/2J	228	676	850	1874	340	50	8.6
235/70R16	109XL	T/H	7J	240	736	1030	2271	340	50	8.7
255/65R16	109	T/H	7J	260	738	1030	2271	300	44	8.9
215/55R17	94	T	7J	226	668	670	1477	300	44	8.5
215/55R17	98XL	V	7J	226	668	750	1653	340	50	8.5
215/60R17	96	T/H	61/2J	221	690	710	1565	300	44	8.5
225/45R17	94XL	T/V	71/2J	225	634	670	1477	340	50	8.6
225/50R17	94	T	7J	233	658	670	1477	300	44	8.6
225/50R17	98XL	V	7J	233	658	750	1653	340	50	8.6
225/55R17	97	T	7J	233	680	730	1609	300	44	8.6
225/55R17	101XL	V	7J	233	680	825	1819	340	50	8.6
225/60R17	99	T/H	61/2J	228	702	775	1709	300	44	8.6
225/65R17	102	T/H	61/2J	228	724	850	1874	300	44	8.6
235/55R17	99	T	71/2J	245	690	775	1709	300	44	8.7
235/55R17	103XL	V	71/2J	245	690	875	1929	340	50	8.7
235/65R17	104	T	7J	240	738	900	1984	300	44	8.7
235/65R17	108XL	V	7J	240	738	1000	2205	340	50	8.7
225/40R18	88	T	8J	230	637	560	1235	300	44	8.6
225/40R18	92XL	V	8J	230	637	630	1389	340	50	8.6
225/45R18	95XL	T/V	71/2J	225	659	690	1521	340	50	8.6
235/40R18	95XL	T/V	81/2J	241	645	690	1521	340	50	8.7
235/45R18	94	T	8J	236	669	670	1477	300	44	8.7
235/45R18	98XL	V	8J	236	669	750	1653	340	50	8.7
235/60R18	103	T	7J	240	739	875	1929	300	44	8.7
235/60R18	107XL	V	7J	240	739	975	2149	340	50	8.7
255/55R18	109XL	H	8J	265	737	1030	2271	340	50	8.9
255/55R18	105	T	8J	265	737	925	2039	300	44	8.9



# WINTER RX818



- Serrated design in the outside main groove assures high grip and braking force on ICE&SNOW covered surfaces.
- Deep and densely distributed grooves and steel sheet helps soften the tread, contributes to shorten braking distance on ice covered surface.

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
175/70R13	82	T	5J	177	576	475	1047	300	44	9.9
175/65R14	82	T	5J	177	584	475	1047	300	44	9.9
185/65R14	90XL	T	1/2J	189	596	600	1323	340	50	9.9
185/65R15	88	T	5 1/2J	189	621	560	1235	300	44	9.9
195/60R15	88	T	6J	201	615	560	1235	300	44	9.9
195/65R15	91	T	6J	201	635	615	1356	300	44	9.9
205/65R15	94	T	6J	209	647	670	1477	300	44	9.9
205/70R15	96	T	6J	209	669	710	1565	300	44	9.9
215/70R15	98	T	6 1/2J	221	683	750	1653	300	44	9.9
205/55R16	91	T	6 1/2J	214	632	615	1356	300	44	9.9
205/55R16	94XL	T	7J	214	632	670	1477	340	50	9.9
205/60R16	92	T	6J	209	652	630	1389	300	44	9.9
215/60R16	95	T	6 1/2J	221	664	690	1521	300	44	9.9
215/65R16	98	T	6 1/2J	221	686	750	1653	300	44	9.9
215/70R16	100	T	6 1/2J	221	708	800	1764	300	44	10.7
225/60R16	102XL	T	6 1/2J	228	676	850	1874	340	50	9.9
235/70R16	109XL	T	7J	240	736	1030	2271	340	50	10.7
225/65R17	102	T	6 1/2J	228	724	850	1874	300	44	10.7
235/65R17	104	T	7J	240	738	900	1984	300	44	10.7
245/45R17	95	T	8J	243	652	690	1521	300	44	9.9
265/70R17	115	T	8J	272	804	1215	2679	300	44	10.7

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
LT245/75R16	120/116	Q	10PR	7J	248	774	1380	3040	1260	2780	550	80	13.1
LT265/70R17	121/118	Q	10PR	8J	272	804	1450	3195	1320	2910	550	80	13.1



Handling



Braking



# RX821



# RX821

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
155/65R13	73	T	4 1/2J	157	532	365	805	300	44	8.7
175/70R14	84	T	5J	177	602	500	1102	300	44	8.7
185/60R14	82	T	5 1/2J	189	578	475	1047	300	44	8.7
185/70R14	88	T	5 1/2J	189	616	560	1235	300	44	8.5
185/65R15	84	T	5 1/2J	189	603	500	1102	300	44	8.7
185/65R15	88	T	5 1/2J	189	621	560	1235	300	44	8.5
195/55R15	85	T	6J	201	595	515	1135	300	44	8.5
195/60R15	88	T	6J	201	615	560	1235	300	44	8.5
195/60R16	89	T	6J	201	640	580	1279	300	44	8.5
195/65R15	91	T	6J	201	635	615	1356	300	44	8.7
195/55R16	87	T	6J	201	620	545	1201	300	44	8.7
205/55R16	90	T	6 1/2J	214	632	600	1323	300	44	8.7
205/60R16	92	T	6J	209	652	630	1389	300	44	8.7
215/60R16	95	T	6 1/2J	221	664	690	1521	300	44	8.7
225/55R16	95	T	7J	233	654	690	1521	300	44	8.5
205/50R17	89	T	6 1/2J	214	638	580	1279	300	44	8.5
215/50R17	91	T	7J	226	648	615	1356	300	44	8.7
215/55R17	94	T	7J	226	668	670	1477	300	44	8.5
225/50R17	94	T	7J	233	658	670	1477	300	44	8.5
245/45R17	95	T	8J	243	652	690	1521	300	44	8.7
245/45R18	96	T	8J	243	677	710	1565	300	44	8.7
245/45R19	102XL	H	8J	243	703	850	1874	340	50	8.5
255/45R19	100	H	8 1/2J	255	713	800	1764	300	44	8.5



**RX826**



**RX828**

**RX826**

SIZE	LOAD INDEX	SPEED RANGE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX PRESSURE		TREAD DEPTH (MM)
						KG	LBS	KPa	PSI	
235/75R15	105	T	61/2J	235	733	925	2039	300	44	9.0
265/70R16	112	T	8J	272	778	1120	2469	300	44	9.0
215/65R16	98	T	61/2J	221	686	750	1653	300	44	8.8
235/70R16	109XL	T	7J	240	736	1030	2271	340	50	9.1
215/60R17	96	T	61/2J	221	690	710	1565	300	44	8.8
225/65R17	102	T	61/2J	228	724	850	1874	300	44	8.8
245/65R17	107	T	7J	248	750	975	2149	300	44	9.0
265/65R17	112	T	8J	272	776	1120	2469	300	44	9.0
215/55R18	95	T	7J	226	693	690	1521	300	44	9.0
225/60R18	100	T	61/2J	228	727	800	1764	300	44	8.8
235/50R18	97	T	71/2J	245	693	730	1609	300	44	9.0
235/55R18	100	T	71/2J	245	715	800	1764	300	44	9.0
235/60R18	103	T	7J	240	739	875	1929	300	44	8.8
235/50R19	99	H	71/2J	245	719	775	1709	300	44	8.8
235/55R19	101	T	71/2J	245	741	825	1819	300	44	9.0
245/55R19	103	T	71/2J	253	753	875	1929	300	44	9.0
255/50R19	107XL	H	8J	265	739	975	2149	340	50	8.8
255/55R19	111XL	H	8J	265	763	1090	2403	340	50	8.8
275/40R20	106XL	H	91/2J	278	728	950	2094	340	50	8.8
275/45R20	110XL	H	9J	273	756	1060	2337	340	50	8.8

**RX828**

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
185R14C	102/100	Q	8PR	51/2J	188	650	850	1875	800	1765	450	65	8.4
195/70R15C	99/96	R	8PR	6J	195	655	775	1710	710	1565	450	65	10.2
6.50R16C	107/102	M	10PR	5.50F	185	750	975	2150	850	1875	560	81	9.7
7.00R16C	111/107	M	10PR	5.50F	198	778	1090	2405	975	2150	560	81	10.7



## Trailer ST100



- Provide good water dispersion for superior wet traction and the reinforced, carcass enhance high speed durability.
- Super structure and special profile provide high load capacity.
- Lateral sipes in the tread blocks provide all-season grip throughout the life of the tyres.

SIZE	LOAD INDEX	SPEED RANGE	PLY	STANDARD RM	SECTION WIDTH (MM)	OVERALL DIAMETER (MM)	MAX LOAD SINGLE		MAX LOAD DOUBLE		MAX PRESSURE		TREAD DEPTH (MM)
							KG	LBS	KG	LBS	KPa	PSI	
ST175/80R13	91/87	L	8PR	5J	177	610	615	1360	545	1200	350	51	7.1
ST205/75R14	105/101	L	8PR	51/2J	203	664	925	2040	825	1820	450	65	7.6
ST205/75R15	107/102	L	8PR	51/2J	203	689	975	2150	850	1870	450	65	7.6
ST225/75R15	117/112	L	10PR	6J	223	719	1285	2830	1120	2470	550	80	7.6
ST235/80R16	123/119	L	10PR	61/2J	235	782	1550	3420	1360	3000	550	80	7.8
ST235/80R16	126/122	L	12PR	61/2J	235	782	1700	3750	1500	3305	660	95	7.8



Handling




Braking



Drainage

## Technical File

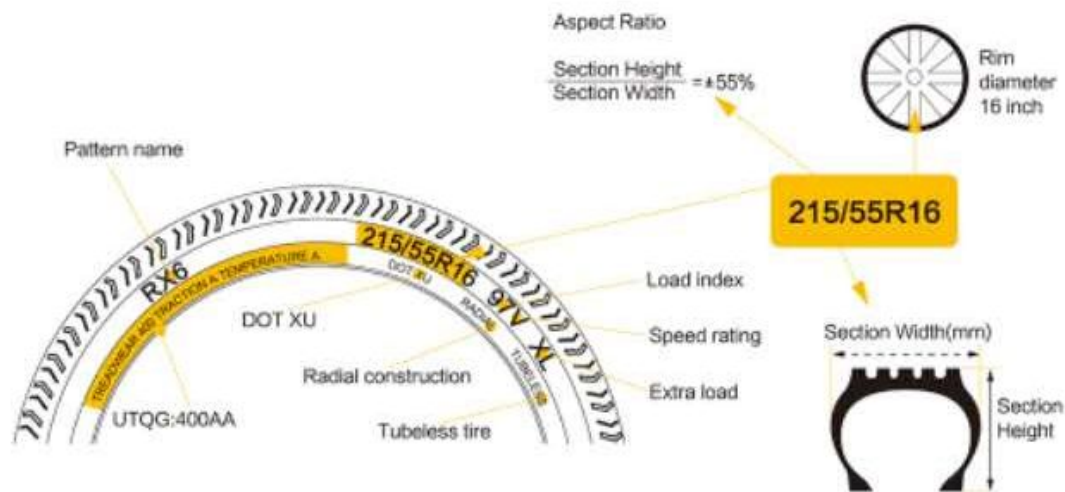

### Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300
Z	Above 240

### Load Capacity Index

LI	KG	LI	KG	LI	KG	LI	KG
50	190	70	335	90	600	110	1060
51	195	71	345	91	615	111	1090
52	200	72	355	92	630	112	1120
53	206	73	365	93	650	113	1150
54	212	74	375	94	670	114	1180
55	218	75	387	95	690	115	1215
56	224	76	400	96	710	116	1250
57	230	77	412	97	730	117	1285
58	236	78	425	98	750	118	1320
59	243	79	437	99	775	119	1360
60	250	80	450	100	800	120	1400
61	257	81	462	101	825	121	1450
62	265	82	475	102	850	122	1500
63	272	83	487	103	875	123	1550
64	280	84	500	104	900	124	1600
65	290	85	515	105	925	125	1650
66	300	86	530	106	950	126	1700
67	307	87	545	107	975	127	1750
68	315	88	560	108	1000	128	1800
69	325	89	580	109	1030	129	1850
						130	1900

## Tire Usage Tips:

### 1. Tire Tread Depth:

Change tyres before the tread depth is worn to 1.6mm. Make sure to regularly check the tread depth of tyres and replace them when they are worn. This will guarantee maximum traction and grip, helping avoid risk of aquaplaning and it will also affect the braking distance etc.

### 2. Tire Balancing:

Tires should be balanced when they are mounted on wheels for the first time or when they are remounted after repair. Tire balance should be checked at the first sign of a vibration or shimmy. Unbalanced tires cause vibration, which can lead to driver fatigue, irregular and premature wear, as well as unnecessary wear to the vehicle's suspension.

### 3. Tire Pressure:

Check the pressure of tyres, including the spare, monthly and before any long journey, preferably when tyres are cold. If they are hot, it is advisable to add 4-5 psi to the pressure recommended by the vehicle manufacturer. Correct tyre pressure reduces the risk of losing control of your vehicle. It also protects your tyres from premature wear and irreversible damage to the internal construction. Tyre pressure can drop due to small perforations, the natural escape of air through the tyre's components or even from a decrease in ambient temperatures. So it is important to check it once a month.

### 4. Wheel Alignment:

#### ENSURE SAFETY WITH CORRECTLY ALIGNED WHEELS AND AXLES

A vehicle is properly aligned when all suspension and steering components are sound and when the tire and wheel assemblies are running straight and true. If you notice uneven tread wear, this could be due to a misalignment and must be serviced by a professional. It's important to ensure correct alignment to get the best road handling, protect your tyres from irregular and / or rapid wear and save fuel.

### 5. Rear Tyres:

For optimum efficiency, regularly check the pressure and condition of your tyres, especially during tyre rotation as many vehicles specify different pressure on the front and rear axle.

#### FOR COMPLETE CONTROL, FIT YOUR NEW TYRES TO THE REAR AXLE.

Rear wheels are not connected to your steering wheel, which makes it extremely difficult to judge their grip while driving. So for your safety, always fit new, or the least worn tyres to the rear wheel positions to ensure:

Better control in emergency braking or tight corners.

Less risk of losing control of your vehicle, especially on wet surfaces.

Better road holding, particularly in difficult situations, whether your car is front or rear wheel drive.

### 6. Tire Repair:

Tire repairs should be carried out by a trained tire professional. Proper repair procedure will include dismounting the tire from the wheel for a thorough inspection to check for damage, and the use of a patch and plug to repair any punctures that fall within the limits and guidelines for repair.

### 7. Tire Rotation:

While many people are capable of rotating their own tires, it is quick, easy and secure to let a professional do it for you. Your vehicle's owner's manual will specify the proper rotation pattern and schedule for your vehicle. If a specific schedule is not indicated, it is a good rule of thumb to rotate your tires every 8,000 to 10,000 kilometers.