



A Global Tyre Brand

Safety, Quality & Performance Go Together



ABOUT US

Arivo is a classic word for arrival, it means "Wherever you go, our tyres will take you to your destination". The design and originality of brand Arivo are from the United Kingdom.

ARIVO TYRE is manufactured for Passenger, SUV, Light Truck and Commercial vehicles with its own unique product range which expands rapidly through European advanced technology in design and production. All tyres have strict quality control and have obtained ISO9001 & ISO 16949 Quality Management System Certification. Product Liability is underwritten by Jordan & Jordan Insurance Group (USA).

We are committed to providing quality tyres and outstanding service to our customers worldwide. Arivo's mission is to bring you an efficient driving and tyre experience for your everyday requirements.

The Ultimate Driving Experience is to arrive at your destination with ARIVO's Safety, Quality and Performance.

ARIVO TYRE CO.,LTD





Buffalo ARA1 Buffalo ARA2 Buffalo ARA3 Buffalo ARD1 Buffalo ARD2 Buffalo ARM1 Buffalo ARM2



Buffalo ARD7 Buffalo ARD8 Buffalo ARST1 Buffalo ARST2 Buffalo ARST3 Buffalo ARST4 Buffalo ARST5



Buffalo ARM3 Buffalo ARM4 Buffalo ARM5 Buffalo ARD3 Buffalo ARD4 Buffalo ARD5 Buffalo ARD6



Buffalo ARST6 Buffalo ARA4 Buffalo ARST7 XST8 XRD5+ XARA34 XARA36



REGIONAL

Buffalo ARA3	02
Buffalo ARD1	03
Buffalo ARST1	04
Buffalo ARST2	05
Buffalo ARST6	06



LONG HAUL

Buffalo ARD7	08
Buffalo ARST3	09
Buffalo ARST4	10
Buffalo ARST5	11



URBAN

Buffalo ARD4	13
--------------	----

ON&OFF ROAD

Buffalo ARA1	15
Buffalo ARA2	16
Buffalo ARD2	17
Buffalo ARD3	18
Buffalo ARD5	19
Buffalo ARD6	20
Buffalo ARD8	21



OFF ROAD

Buffalo ARM1	23
Buffalo ARM2	24
Buffalo ARM3	25
Buffalo ARM4	26
Buffalo ARM5	27
Buffalo ARA4	28
Buffalo ARST7	29
XST8	30
XRD5+	31
XARA34	32
XARA36	33

EUROPEAN TBR SERIES
SINCE 35 TO 41



REGIONAL



BUFFALO ARA3



- Medium and Short mileage trucks running on paved and unpaved roads
- Tread chunking resistance
- Cut resistance

SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
12.00R24	160/157	K	20PR	15	4500	4125	313	1266	900	131



BUFFALO ARD1

- Medium and long mileage trucks running on paved and highway roads
- Excellent traction
- High wear resistance
- Tread chunking resistance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	148/145	M	16PR	20	3000	2725	279	1058	830	120
12R22.5	152/149	M	18PR	20	3550	3250	300	1090	830	135
215/75R17.5	127/124	M	16PR	15	1750	1600	210	766	830	120
215/75R17.5	135/133	J	18PR	15	2180	2060	210	766	850	123
235/75R17.5	132/129	M	16PR	15.5	2000	1850	230	789	830	120
235/75R17.5	143/141	J	18PR	15.5	2000	1850	230	789	875	127
275/70R22.5	148/145	M	16PR	18	3150	2900	272	962	900	131
295/80R22.5	152/149	L	18PR	20	3550	3250	298	1050	900	131
315/70R22.5	154/150	L	20PR	20	3750	3350	312	1020	900	131
315/80R22.5	156/150	K	20PR	20	4000	3350	312	1082	850	123



BUFFALO ARST1

- Medium and long mileage trucks running on paved and highway roads
- High wear resistance
- Longer mileage
- Good cost-performance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
215/75R17.5	127/124	M	16PR	12	1750	1600	210	766	830	120
215/75R17.5	135/133	J	18PR	12	2180	2060	210	766	850	123
235/75R17.5	132/129	M	16PR	12.5	2000	1850	230	789	830	120
235/75R17.5	143/141	J	18PR	12.5	2725	2575	230	789	875	127
275/70R22.5	148/145	M	16PR	14.5	3150	2900	272	952	900	131
295/80R22.5	152/149	M	18PR	15.5	3550	3250	298	1044	900	131
315/70R22.5	154/150	M	20PR	15	3750	3350	312	1010	900	131
315/80R22.5	156/150	K	20PR	18	4000	3350	312	1078	850	123
385/65R22.5	160	L	20PR	15	4500	4500	380	1073	900	131



BUFFALO ARST2

- Medium and long mileage trucks running on paved and highway roads
- High wear resistance
- Longer mileage
- Good cost-performance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	146/143	M	16PR	13	3000	2725	279	1052	830	120
12R22.5	152/149	M	18PR	14.5	3550	3250	300	1084	930	135
295/80R22.5	152/149	L	18PR	14.5	3550	3250	298	1044	900	131
315/80R22.5	156/150	M	20PR	14.5	4000	3350	312	1078	850	123



BUFFALO ARST6

- Medium and long mileage trucks running on paved and highway roads
- High wear resistance
- Low noise emissions
- Long tread life



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11.00R20	152/149	K	18PR	17	3550	3250	293	1085	930	135

LONG HAUL



BUFFALO ARD7

- Medium and Long distance vehicles on paved roads
- Longer mileage




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
295/80R22.5	152/149	L	18PR	18	3550	3250	298	1044	900	131
315/80R22.5	156/150	M	20PR	18	4000	3350	312	1078	850	123



BUFFALO ARST3

- Medium and long mileage trucks running on paved and highway roads
- Durable and wear-resistant sidewall
- Low noise emissions and reduced stone retention



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	146/143	M	16PR	14.5	3000	2725	279	1052	830	120
11R24.5	149/146	M	16PR	14.5	3250	3000	279	1104	830	120
295/75R22.5	146/143	M	16PR	14.5	3000	2725	298	1016	830	120



BUFFALO ARST4

- Medium and long mileage vehicles running on paved roads
- Long tread life and great high speed stability
- Durable and wear-resistant sidewall
- Low noise emissions and reduced stone retention



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
385/65R22.5	160	L	20PR	15	4500	4500	380	1073	900	131



BUFFALO ARST5

- Medium and long mileage vehicles running on paved roads
- Long tread life and great high speed stability
- Durable and wear-resistant sidewall
- Low noise emissions and reduced stone retention



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
275/70R22.5	148/145	M	16PR	14.5	3150	2900	272	952	900	131
385/65R22.5	160	L	20PR	15	4500	4500	380	1073	900	131

URBAN





BUFFALO ARD4

- Short mileage vehicles on paved roads
- Excellent durability
- High scurb resistance

SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	146/143	K	16PR	20	3000	2725	279	1058	830	120
11R24.5	146/143	K	16PR	20	3250	3000	279	1104	830	120
295/75R22.5	146/143	K	16PR	20	3000	2725	290	1022	830	120

ON&OFF ROAD





BUFFALO ARA1

- Medium and Long mileage trucks running on paved and unpaved roads
- Excellent durability



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	146/143	M	16PR	14.5	3000	2725	278	1052	830	120
12R22.5	152/149	M	18PR	14.5	3550	3250	300	1084	930	135
13R22.5	156/150	L	20PR	15	4000	3350	320	1120	875	127
295/80R22.5	152/149	M	18PR	15.5	3550	3250	298	1044	900	131
315/80R22.5	156/150	M	20PR	14.5	4000	3350	312	1076	850	123
9.00R20	144/141	K	16PR	15	2800	2575	259	1019	900	131
10.00R20	148/146	K	18PR	16.5	3250	3000	278	1058	930	135
11.00R20	152/149	K	18PR	16	3550	3250	293	1082	930	135
12.00R20	156/153	K	20PR	16	4000	3650	315	1125	900	131
12.00R24	160/157	K	20PR	15	4500	4125	315	1220	900	131
7.00R16	118/114	L	14PR	11	1320	1180	200	775	770	110
7.50R16	122/118	L	16PR	12.5	1500	1350	215	805	770	110
8.25R16	128/124	K	16PR	12	1800	1600	235	865	770	110



BUFFALO ARA2

- Medium and Long mileage trucks running on paved and unpaved roads
- Excellent durability




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
10.00R20	149/146	K	18PR	16.5	3250	3000	278	1058	930	135
11.00R20	152/149	K	18PR	16.3	3550	3250	293	1082	930	135
12.00R20	156/153	K	20PR	16	4000	3650	315	1125	900	131
12.00R24	160/157	K	20PR	15	4500	4125	315	1220	900	131



BUFFALO ARD2

- Medium and Short mileage vehicles running on paved and unpaved roads
- Excellent traction
- High scrub resistance
- Cut resistance




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
9.00R20	144/141	J	16PR	15	2800	2575	259	1019	900	131
10.00R20	149/146	J	18PR	16	3250	3000	278	1058	930	135
11.00R20	152/149	J	18PR	18.3	3550	3250	293	1085	930	135
12.00R20	156/153	J	20PR	19	4000	3650	315	1125	900	131



BUFFALO ARD3

- Medium and Short distance Dump truck tire drive position on mixed road condition
- Excellent durability
- High strength
- Excellent grip




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	146/143	K	16PR	20	3000	2725	279	1058	830	120
12R22.5-BZ	152/149	J	18PR	19	3550	3250	300	1090	930	135
13R22.5	156/150	K	20PR	20	4000	3350	320	1124	875	127
295/80R22.5	152/149	K	18PR	20	3550	3250	298	1050	900	131
315/80R22.5	156/150	K	20PR	20	4000	3350	312	1082	850	123
12.00R20	156/153	K	20PR	19	4000	3650	315	1128	900	131



BUFFALO ARD5

- Medium and Short distance Dump truck tire drive position on mixed road condition
- Excellent durability
- High strength



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE			A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI	
315/80R22.5	156/150	K	20PR	18	4000	3350	312	1078	850	123	



BUFFALO ARD6

- Excellent traction
- Excellent durability
- Tread chunking resistance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE			A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI	
11.00R20	152/149	G	18PR		3550	3250	293	1086	930	135	
12.00R20	156/153	G	20PR		4000	3650	315	1126	900	131	



BUFFALO ARD8

- Medium and Short mileage vehicles running on paved and unpaved roads
- High scrub resistance
- Cut resistance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
12.00R24	160/157	K	20PR	15	4500	4125	315	1220	900	131




OFF ROAD



BUFFALO ARM1

- Short mileage vehicles running on unpaved roads
- High scrub resistance
- Excellent traction



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	148/145	G	16PR	20	3000	2725	278	1058	830	120
12R22.5	152/149	G	18PR	20	3550	3250	300	1090	830	135
13R22.5	156/150	G	20PR	20	4000	3350	320	1124	875	127
11.00R20	152/149	G	18PR	20	3550	3250	293	1086	830	135
12.00R20	156/153	G	20PR	21	4000	3650	315	1128	900	131



BUFFALO ARM2

- Short mileage vehicles running on unpaved roads
- High durability
- Impact resistant
- Reduce stone retention




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
10.00R20	149/146	G	18PR	20	3250	3000	278	1060	830	135
11.00R20	152/149	G	18PR	23	3550	3250	293	1092	830	135
12.00R20	156/153	G	20PR	23	4000	3650	315	1132	900	131



BUFFALO ARM3

- Short mileage vehicles running on unpaved roads
- Excellent traction
- Tread chunking resistance



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE			A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI	
295/80R22.5	152/148	G	18PR	20	3550	3250	298	1050	850	123	
12.00R20	156/153	G	20PR	20	4000	3650	315	1125	900	131	




BUFFALO ARM4

- Short mileage vehicles running on unpaved roads
- High durability
- Impact resistant




SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE			A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI	
11.00R20	152/149	G	18PR	23	3550	3250	293	1092	930	135	
12.00R20	156/153	G	20PR	23	4000	3650	315	1132	900	131	

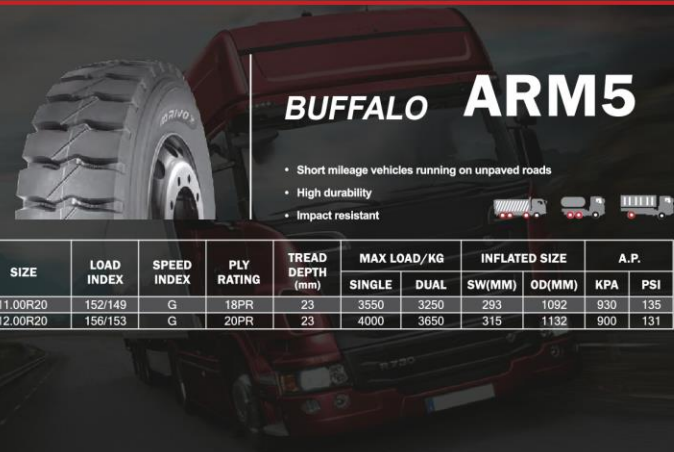

BUFFALO ARM5

- Short mileage vehicles running on unpaved roads
- High durability
- Impact resistant



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/ KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11.00R20	152/149	G	18PR	23	3550	3250	293	1092	930	135
12.00R20	156/153	G	20PR	23	4000	3650	315	1132	900	131



BUFFALO ARA4

- Excellent high-speed performance: three longitudinal broken line main grooves make the tire have good directional stability and high-speed performance.
- Reduce tire heat: Shoulder grooves effectively reduce tire heat build-up
- Efficient self-cleaning: Y-shaped groove design improves tire self-cleaning performance
- Road conditions: Expressways, national highways, provincial highways and urban and rural highways



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/ KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
315/80R22.5	156/150	L	20PR	14	-	-	-	-	-	-

BUFFALO ARST7


- The pattern design has stone ejector, good heat dissipation and drainage performance.
- Suitable for high-speed and high-grade paved roads and trailers.
- The guide lug wheel of the matching vehicle has good control performance, effectively prevents side slip, and provides good carrying performance.
- Excellent wear resistance, low heat generation, low rolling resistance and fuel saving.



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
315/80R22.5	156/150	M	20PR	14	4000	3350	312	1082	850	123

XST8


- Excellent anti-sideslip performance, low rolling resistance and noise
- Enclosed shoulders prevent the tyres from eccentric wear.
- Four zigzag longitudinal grooves provide excellent directional driving performance and avoid groove cracking.



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	148/145	M	18PR	14.5	-	-	-	-	-	-

XRD5+

- Transverse and wide grooves provide outstanding traction performance.
- Longitudinal grooves improve the performance of drainage and heat dissipation.
- Cutting resistance compound is suitable for various road conditions.
- Wider tread cap and deeper grooves provide excellent wear resistance.



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
11R22.5	148/145	M	18PR	21.5	-	-	-	-	-	-

XARA34


- Suitable for short-distance mixed road.
- It is especially suitable for short-distance work with high load, and the optimized tread design effectively avoids uneven wear.
- The low heat composite matrix ensures high mileage and the small zigzag tread design improves grip.



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
12.00R24-1N	160/157	K	20PR	14.5	4500	4125	-	-	900	130
325/95R24-1N	162/160	K	22PR	15.5	4750	4500	-	-	930	135

XARA36

- Excellent pattern design, with excellent traction and braking.
- Tire tread pattern groove heat dissipation efficiency, excellent drainage performance.
- Special formula structure design, small rolling resistance, wear resistance, oil saving.



SIZE	LOAD INDEX	SPEED INDEX	PLY RATING	TREAD DEPTH (mm)	MAX LOAD/KG		INFLATED SIZE		A.P.	
					SINGLE	DUAL	SW(MM)	OD(MM)	KPA	PSI
10.00R20	149/146	L	18PR	16.5	-	-	-	-	-	-
11.00R20	152/149	K	18PR	16.3	-	-	-	-	-	-
12.00R20	156/153	K	20PR	16.0	-	-	-	-	-	-
13R22.5	156/153	K/L	20PR	18.0	-	-	-	-	-	-
325/95R24	162/160	K	22PR	15.5	-	-	-	-	-	-



**EUROPEAN
TBR SERIES**



XARA31 XARD41 XARD42 XARD43 XARD49 XARS91



XARS92 XARS93 XARS94 XARS97 XARS99 XART21



XARA31

POSITION:
ALL POSITION



- Applicable to national highway, high speed and high various comprehensive pavements.
- Especially suitable for medium and long distance transportation, with good steering performance
- Features: anti-sideslip, good drainage performance and heat dissipation performance, Anti-stone trapping groove design, high mileage.

SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
11R22.5	18	148/145	M	15
315/80R22.5	20	156/150	M	15
13R22.5	18	156/150	L	17



XARD41

POSITION:
DRIVE



- Suitable for national high way and high-grade paved roads.
- Improved pattern design effectively avoids uneven wear.
- Better grip with excellent driving and braking performance; excellent wear resistance.

SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
385/65R22.5	20	160	J	15
425/65R22.5	20	165	J	17.5
445/65R22.5	20	169	K	18

XARD42

POSITION:
DRIVE



- Suitable for long-distance mixed road transportation;
- The rubber in the middle of the crown is highly saturated, durable and wear-resistant, and the longitudinal groove design has good heat dissipation performance;
- Excellent block pattern design to achieve maximum power transmission.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
11R22.5*	16	146/143	M	20
315/80R22.5*	20	156/150	M	20
295/80R22.5*	18	152/149	M	20
275/80R22.5*	16	149/146	M	19
315/70R22.5*	18	156/150L (154/150M)		20
215/75R17.5*	18	135/133	J	15
235/75R17.5*	18	143/141	J	15
225/70R19.5*	14	128/126	M	15
245/70R19.5*	16	136/134	M	15
265/70R19.5*	16	140/138	M	15
315/60R22.5*	18	154/148M	L	※
285/70R19.5*	18	146/144L (144/142M)		16

The sizes with * have 3PMSF

XARD43

POSITION:
DRIVE



- Suitable for medium- and short-distance transportation on mixed roads
- The pattern has certain directionality and excellent traction performance.
- Thick carcass structure has a good durability, not easy to be broken and separated.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
315/80R22.5	20	156/150	M	20
13R22.5	18	156/150	L	17.5

XARD49

POSITION:
DRIVE



- Applicable to national highway, high speed and high grade pavement.
- It is suitable for long-distance load transportation
- Typical block pattern design, lines have excellent ability to grasp the ground, so that the vehicle in the operation of good traction, braking performance, widened tread running surface design, so that the tires have a good use cycle.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
315/80R22.5	20	156/150	L	22



XARS91

POSITION:
STEER/TRAILER



- Applicable to national highway, high speed and high grade pavement;
- Especially suitable for medium and long distance transportation, with good guiding performance;
- Features: anti-sideslip, good drainage, heat dissipation performance, decorative pattern ditch anti-clamping stone design long mileage.

SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
11R22.5*	16	146/143	M	14
215/75R17.5*	18	135/133	J	12.5
235/75R17.5*	18	143/141	J	12.5
225/70R19.5*	14	128/126	M	12.5
245/70R19.5*	16	136/134	M	12.5
265/70R19.5*	16	140/138	M	12.5
275/70R22.5*	18	148/145	M	14
255/70R22.5*	16	140/137	M	14
285/70R19.5*	18	150/148	J	13

The sizes with * have 3PMSF

XARS92

POSITION:
STEER/TRAILER 

- Suitable for national roads, high-speed and high-grade paved roads.
- Effectively prevents side slips and provides good carrying performance.
- Good heat dissipation and stone ejector.
- Excellent durability and wear resistance.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
11R22.5*	16	146/143	M	15
315/80R22.5*	20	188/150L (154/150M)		16
295/80R22.5*	18	152/149	M	15
275/80R22.5*	16	149/146	M	14
315/70R22.5*	18	156/150L (154/150M)		15
315/60R22.5*	18	154/148	M	14.5

The sizes with * have 3PMSF

XARS93

POSITION:
STEER/TRAILER 

- Suitable for national roads, high-speed and high-grade paved roads.
- Effectively prevents side slips and provides good carrying performance.
- Good heat dissipation and stone ejector.
- Excellent durability and wear resistance.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
295/60R22.5	18	150/147	M	14.5

XARS94


POSITION:
STEER/TRAILER 

- Suitable for national roads, high-speed and high-grade paved roads.
- Effectively prevents side slips and provides good carrying performance.
- Good heat dissipation and stone ejector.
- Excellent durability and wear resistance.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
295/60R22.5	18	150/147	M	14.5

XARS97

POSITION:
STEER/TRAILER 

- Suitable for national highway, high speed and high-grade pavement.



SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
315/80R22.5	20	156/150	M	15

XARS99

POSITION:
STEER/TRAILER 

- Applicable to national highway, high speed and high grade pavement.
- Especially suitable for medium and long distance transportation, with goodguiding performance.
- Features: anti-sideslip, good drainage, heat dissipation performance,decorative pattern ditch anti-stone design, high mileage.

XART21

POSITION:
STEER/TRAILER 

- Suitable for national road, high speed and high-grade paving road.
- Provide excellent steering and anti-skid performance.
- Good performance in self-cleaning in addition to stone removal, preventtread cracks.
- Reduce tread heat and have good abrasion resistance.

SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
315/80R22.5	20	156/150	L	16

SIZE	PLY RATING	LOAD INDEX	SPEED INDEX	DEPTH (mm)
385/65R22.5*	20	160	K	15
385/55R22.5*	20	160K/158L	K	15
425/65R22.5*	20	165	K	15
445/65R22.5*	20	169	K	15
435/50R19.5*	18	160	J	15
445/45R19.5*	22	160	J	15

The sizes with * have 3PMSF

