




**Bànlǔ**Tires

***RUNEVER***

***ALL-STEEL  
RADIAL TYRE***

# PRODUCT POSITIONING

## 产品定位

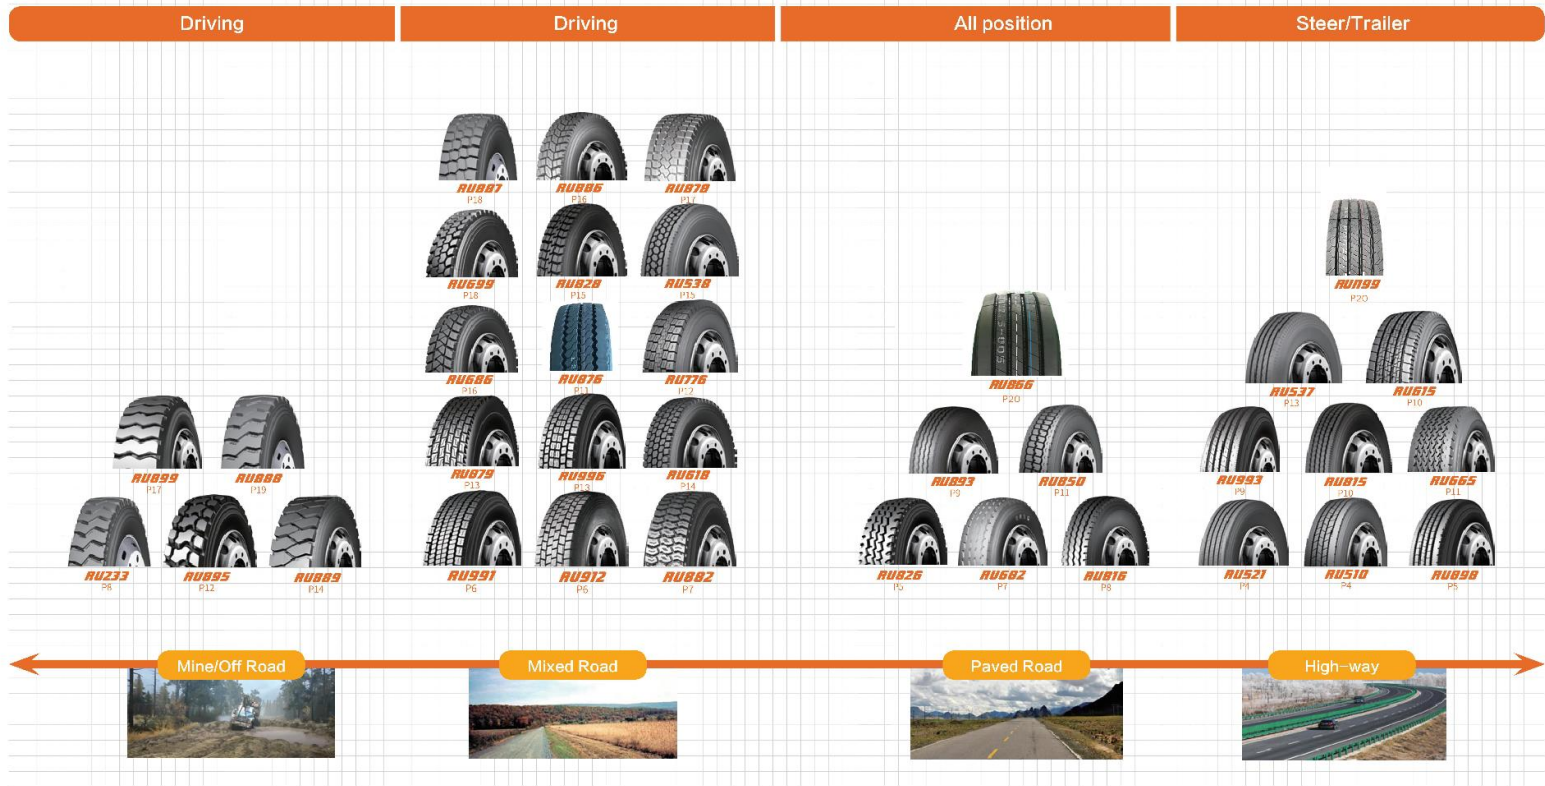



**RU521**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 High speed, heavy load, lateral spreads, good wet grip, low rolling resistance
- 2 Suitable for trailer wheels

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5     | H/16  | 146/145M      | 8.25         | 10.3             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 11R24.5     | H/16  | 149/146M      | 8.25         | 10.3             | 1104     | 279                | 3250                   | 3000 | 830                      | 830  | TL   |
| 295/75R22.5 | H/16  | 146/143M      | 9.00         | 10.3             | 1014     | 298                | 3000                   | 2725 | 830                      | 830  | TL   |



**RU510**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Mixed highway and freeway application for long distance and national transportation service
- 2 Special tread compound and design provide low heat build-up
- 3 Wide and closed shoulder design provides strong shoulder and excellent wear-resistance
- 4 Deep pattern and strong carcass provide long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 295/80R22.5 | J/18  | 152/149M      | 9.00         | 16.0             | 1044     | 298                | 3550                   | 3250 | 900                      | 900  | TL   |



**RUB26**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Special tread compound and design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
- 2 Super steel belt carcass construction enhances casing strength and maximized tyre load capacity
- 3 Four ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface
- 4 Suitable for light truck, truck, heavy duty truck and bus on general roads and good roads

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 7.00R16     | G/2.4 | 118/114L      | 5.50F        | 12.0             | 775      | 200                | 1320                   | 1180 | 770                      | 770  | TT   |
| 7.50R16L    | G/2.4 | 122/118L      | 6.00G        | 11.0             | 805      | 215                | 1500                   | 1320 | 770                      | 770  | TT   |
| 8.25R16T    | H/16  | 178/174       | 6.50H        | 12.0             | 835      | 235                | 1800                   | 1600 | 770                      | 770  | TT   |
| 8.25R20     | H/26  | 139/137L      | 6.5          | 14.0             | 974      | 236                | 2430                   | 2300 | 930                      | 930  | TT   |
| 9.00R20     | H/26  | 144/142K      | 7.0          | 15.5             | 1030     | 258                | 2800                   | 2600 | 900                      | 900  | TT   |
| 10.00R20    | J/18  | 148/146K      | 7.5          | 16.0             | 1054     | 278                | 3200                   | 3000 | 930                      | 930  | TT   |
| 11.00R20    | J/18  | 152/149K      | 8.0          | 16.5             | 1085     | 293                | 3350                   | 3250 | 930                      | 930  | TT   |
| 12.00R20    | J/20  | 156/153K      | 8.5          | 17.0             | 1125     | 315                | 4000                   | 3600 | 900                      | 900  | TT   |
| 17.00R24    | J/20  | 160/157K      | 8.5          | 14.0             | 1276     | 315                | 4300                   | 4125 | 900                      | 900  | TT   |
| 11R22.5     | H/16  | 145/145M      | 8.25         | 10.0             | 1054     | 275                | 3150                   | 2900 | 830                      | 830  | TL   |
| 11R24.5     | H/16  | 149/146M      | 8.25         | 10.0             | 1104     | 275                | 3250                   | 3000 | 830                      | 830  | TL   |
| 13R22.5     | J/18  | 152/149       | 9.00         | 16.5             | 1085     | 300                | 3350                   | 3200 | 930                      | 930  | TL   |
| 13R22.5     | J/20  | 156/153L      | 9.75         | 16.5             | 1124     | 320                | 4000                   | 3650 | 930                      | 930  | TL   |
| 315/80R22.5 | J/20  | 156/150K      | 9.00         | 15.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |



**RUB98**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 9.5R17.5    | J/18  | 143/141M      | 6.75         | 13.5             | 942      | 240                | 2725                   | 2575 | 875                      | 875  | TL   |
| 11R22.5     | H/16  | 145/145M      | 8.25         | 15.0             | 1054     | 275                | 3150                   | 2900 | 830                      | 830  | TL   |
| 12R22.5     | J/18  | 152/149M      | 9.00         | 15.0             | 1085     | 300                | 3350                   | 3250 | 930                      | 930  | TL   |
| 215/75R17.5 | H/16  | 135/133J      | 6.00         | 13.0             | 767      | 211                | 2180                   | 2080 | 850                      | 850  | TL   |
| 235/10R22.5 | H/16  | 140/137M      | 7.50         | 14.5             | 930      | 236                | 2500                   | 2300 | 830                      | 830  | TL   |
| 275/10R22.5 | J/18  | 146/145M      | 8.25         | 15.0             | 968      | 216                | 3150                   | 2900 | 900                      | 900  | TL   |
| 295/75R22.5 | H/16  | 145/143M      | 9.00         | 15.0             | 1014     | 288                | 3000                   | 2725 | 830                      | 830  | TL   |
| 295/80R22.5 | J/18  | 152/149M      | 9.00         | 15.0             | 1044     | 288                | 3350                   | 3200 | 900                      | 900  | TL   |
| 315/80R22.5 | J/20  | 156/150K      | 9.00         | 15.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |



**RU991**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season high-way conditions
- 3 Cool running compound to promote longer life, great CPK performer

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5 | H/16  | 148/145M      | 8.25         | 21.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |



**RU912**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season high-way conditions
- 3 Tread bars maintain an even footprint and help prevent tyre squirm
- 4 Cool running compound to promote longer life, great CPK performer

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 265/70R19.5 | J/18  | 143/141M      | 7.50         | 17.0             | 867      | 262                | 2725                   | 2575 | 850                      | 850  | TL   |
| 11R22.5     | H/16  | 148/145M      | 8.25         | 21.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 12R22.5     | J/18  | 152/149L      | 9.00         | 22.0             | 1085     | 306                | 3550                   | 3250 | 930                      | 930  | TL   |
| 295/80R22.5 | J/18  | 152/149M      | 9.00         | 20.0             | 1044     | 298                | 3550                   | 3250 | 900                      | 900  | TL   |



**RU682**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Apply to paved and high speed roads, long distance vehicles
- 2 High speed stability, strong resistance, super wear resistance and good heat resistance

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 385/65R22.5 | L/20  | 160K          | 11.75        | 17.0             | 1072     | 389                | 4500                   | -    | 900                      | -    | TL   |
| 425/65R22.5 | L/20  | 164J          | 12.25        | 18.0             | 1124     | 422                | 5000                   | -    | 830                      | -    | TL   |



**RU882**  
ALL-STEEL RADIAL TYRE



Best  
Available

- 1 Mixed open pattern design offers excellent traction and brake performance
- 2 Wide tread improves tire wear resistance
- 3 Suitable for driving wheels

| Size     | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 12.00R24 | L/20  | 160/157K      | 8.5          | 17.0             | 1226     | 315                | 4500                   | 4125 | 900                      | 900  | TT   |



**RU816**  
ALL-STEEL RADIAL TYRE



Best  
Available

1. Special tread compound and design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
2. Super steel belt carcass construction enhances casing strength and maximized tyre load capacity
3. Four ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface

| Size     | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 10.00R20 | J/18  | 149/146L      | 7.5          | 16.0             | 1054     | 278                | 3250                   | 3000 | 930                      | 930  | TT   |
| 11.00R20 | J/18  | 152/149L      | 8.0          | 16.5             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20  | 156/153L      | 8.5          | 17.0             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |
| 12.00R24 | L/20  | 160/157K      | 8.5          | 14.0             | 1226     | 315                | 4500                   | 4125 | 900                      | 900  | TT   |



**RU233**  
ALL-STEEL RADIAL TYRE



Best  
Available

1. Applicable for driving wheels, For short distance with low speed on mining and off roads
2. Pattern design offers excellent pulling force
3. Special tread compound offers excellent cut resistance
4. Reinforced bead design provides excellent load capacity

| Size      | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|           |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 8.25R16LT | H/16  | 128/124F      | 6.50H        | 18.0             | 855      | 235                | 1800                   | 1600 | 770                      | 770  | TT   |
| 8.25x20   | H/16  | 139/137L      | 6.5          | 19.0             | 914      | 236                | 2430                   | 2300 | 930                      | 930  | TT   |



**RU893**  
ALL-STEEL RADIAL TYRE



Best  
Available

1. Four zigzag main grooves provide excellent directional driving performance
2. High speed stability, strong resistance, super wear resistance and good heat resistance

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5 | H/16  | 148/145M      | 8.25         | 17.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |



**RU993**  
ALL-STEEL RADIAL TYRE



Best  
Available

1. For mixed highway and freeway, long distance and national transportation service
2. Unique tread pattern design minimizes side sliding on wet road surface
3. Wide and flat tread area offers smooth wear
4. Wear-resistance compound design offers long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 315/80R22.5 | L/20  | 156/150M      | 9.00         | 15.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |



**RU615**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Four straight main grooves provide excellent directional driving performance
- 2 High speed stability, strong resistance, super wear resistance and good heat resistance
- 3 Suitable for front wheel or all position

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 9.5R17.5    | J/18  | 143/141M      | 6.75         | 13.5             | 872      | 240                | 2725                   | 2575 | 875                      | 875  | TL   |
| 215/75R17.5 | H/16  | 135/133L      | 6.00         | 12.5             | 767      | 211                | 2180                   | 2060 | 850                      | 850  | TL   |
| 235/75R17.5 | H/16  | 143/141L      | 6.75         | 12.5             | 803      | 233                | 2725                   | 2575 | 850                      | 850  | TL   |
| 265/70R19.5 | J/18  | 143/141M      | 7.50         | 14.5             | 867      | 262                | 2725                   | 2575 | 850                      | 850  | TL   |
| 255/70R22.5 | H/16  | 140/137M      | 7.50         | 14.5             | 930      | 255                | 2500                   | 2300 | 830                      | 830  | TL   |
| 275/70R22.5 | J/18  | 148/145M      | 8.25         | 15.0             | 958      | 276                | 3150                   | 2900 | 900                      | 900  | TL   |



**RU815**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side skidding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 215/75R17.5 | H/16  | 135/133L      | 6.00         | 12.5             | 767      | 211                | 2180                   | 2060 | 850                      | 850  | TL   |
| 9.5R17.5    | J/18  | 143/141M      | 6.75         | 13.5             | 872      | 240                | 2725                   | 2575 | 875                      | 875  | TL   |



**RU665**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Application for all position on mixed Highway and freeway
- 2 Special tread compound provides low heating up, smooth wear&cut resistance, and low rolling resistance
- 3 Suitable for heavy duty truck and bus

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 385/65R22.5 | L/20  | 160K          | 11.75        | 16.5             | 1072     | 389                | 4500                   | -    | 900                      | -    | TL   |



**RU850**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Special tread design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
- 2 Hour ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface
- 3 closed shoulder provides excellent performance on resisting uneven wear

| Size     | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 12.00R24 | L/20  | 160/157K      | 8.5          | 14.0             | 1226     | 315                | 4500                   | 4125 | 900                      | 900  | TT   |



**RU876**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Application for all position on mixed Highway and freeway
- 2 Special tread compound provides low heating up, smooth wear&cut resistance, and low rolling resistance
- 3 Suitable for heavy duty truck and bus

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 12R22.5 | J/18  | 152/149L      | 9.00         | 16.5             | 1083     | 300                | 3550                   | 3250 | 930                      | 930  | TL   |
| 13R22.5 | J/20  | 156/153L      | 9.75         | 16.5             | 1124     | 320                | 4000                   | 3650 | 930                      | 930  | TL   |



**RU895**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Massive lugs provide the tire with excellent traction and driving performance
- 2 Deeper tread offers extended mileage
- 3 Open shoulder structure provides good water dispersion as well as side slip resistance

| Size     | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5  | H/16  | 148/143L      | 8.25         | 22.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 10.00R20 | J/18  | 149/146F      | 7.5          | 19.0             | 1054     | 278                | 3250                   | 3000 | 930                      | 930  | TT   |
| 11.00R20 | J/18  | 152/149F      | 8.0          | 19.5             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20  | 156/153F      | 8.5          | 20.5             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



**RU776**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5 | H/16  | 148/145M      | 8.25         | 22.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |



**RU879**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season highway conditions
- 3 Tread bars maintain an even footprint and help prevent tyre squirm
- 4 Cool running compound to promote longer life, great CFK performer

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 315/80R22.5 | L/20  | 156/150L      | 9.00         | 20.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |



**RU996**  
ALL-STEEL RADIAL TYRE



Best Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season highway conditions
- 3 Cool running compound to promote longer life, great CFK performer

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |         | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|---------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual    | Single                   | Dual |      |
| 295/80R22.5 | J/18  | 20.50         | 152/149 M    | 9.00             | 298      | 1044               | 3550/3250              | 900/900 | TL                       | 850  | TL   |



**RUS37**  
ALL-STEEL RADIAL TYRE



- 1 For mixed Highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 265/70R19.5 | F/16  | 140/138M      | 7.50         | 13.5             | 867      | 262                | 2500                   | 2360 | 775                      | 775  | TL   |
| 265/70R19.5 | J/18  | 143/141M      | 7.50         | 13.5             | 867      | 262                | 2725                   | 2515 | 800                      | 850  | TL   |
| 11R22.5     | F/16  | 148/145M      | 8.25         | 15.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 11R24.5     | F/16  | 149/146M      | 8.25         | 15.0             | 1104     | 279                | 3250                   | 3000 | 830                      | 830  | TL   |
| 295/75R22.5 | F/16  | 146/143M      | 9.00         | 15.0             | 1014     | 298                | 3000                   | 2725 | 830                      | 830  | TL   |



**RU889**  
ALL-STEEL RADIAL TYRE



- 1 Application for driving wheels
- 2 Suitable for short distance with low speed on mining and bad roads
- 3 Block pattern design offers good pulling force special tread compound offers excellent cut resistance
- 4 Reinforced bead area design provides excellent load capacity

| Size     | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 9.00R20  | F/16  | 144/142F      | 7.0          | 25.0             | 1030     | 259                | 2800                   | 2650 | 900                      | 900  | TT   |
| 11.00R20 | J/18  | 152/149F      | 8.0          | 25.0             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20  | 156/153F      | 8.5          | 25.0             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



**RU618**  
ALL-STEEL RADIAL TYRE



- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5 | H/16  | 149/145M      | 8.25         | 22.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 11R24.5 | H/16  | 149/146M      | 8.25         | 22.0             | 1104     | 279                | 3250                   | 3000 | 830                      | 830  | TL   |



**RU828**  
ALL-STEEL RADIAL TYRE



- 1 Ultra drive and brake ability, tearing resistance, cutting resistance, abrasion resistance, good load capacity
- 2 Suitable for medium trucks, for driving wheels and drag wheels

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 9.5R17.5    | J/18  | 143/141M      | 6.75         | 14.5             | 847      | 240                | 2725                   | 2575 | 875                      | 875  | TL   |
| 215/75R17.5 | H/16  | 135/133J      | 6.00         | 14.5             | 767      | 211                | 2180                   | 2060 | 850                      | 850  | TL   |
| 225/75R17.5 | H/16  | 143/141J      | 6.75         | 14.0             | 803      | 233                | 2725                   | 2575 | 850                      | 850  | TL   |
| 275/70R22.5 | J/18  | 148/145L      | 8.25         | 21.0             | 958      | 276                | 3150                   | 2900 | 900                      | 900  | TL   |
| 11R22.5     | H/16  | 148/145M      | 8.25         | 22.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |



## RU538

ALL-STEEL RADIAL TYRE



- 1 Mixed highway and freeway application, for long distance and national transportation service
- 2 Special tread compound and design provide low heat build-up, low rolling resistance and minimized gasoline consumption
- 3 Special tread design offers super grip on wet road surface and minimized driving noise

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11R22.5     | H/16  | 146/145M      | 8.25         | 22.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |
| 11R24.5     | H/16  | 149/146M      | 8.25         | 22.0             | 1104     | 279                | 3250                   | 3000 | 830                      | 830  | TL   |
| 295/75R22.5 | H/16  | 146/143M      | 9.00         | 22.0             | 1014     | 258                | 3000                   | 2725 | 830                      | 830  | TL   |



## RU686

ALL-STEEL RADIAL TYRE



- 1 Applicable for driving wheels, Suitable for short distance with low speed on mining and bad roads
- 2 Directional mixed pattern provides excellent traction
- 3 Open shoulder structure provides good ability of water dispersion as well as anti-hydroplaning
- 4 Streamline pattern effectively ejects stones and prevents possible damage to tire groove bottom

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 315/80R22.5 | L/20  | 156/150K      | 9.00         | 22.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |



## RU886

ALL-STEEL RADIAL TYRE



- 1 Mixed open pattern design offers excellent traction and brake performance
- 2 Wide tread improves tire wear resistance
- 3 Suitable for driving wheels

| Size      | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|-----------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|           |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 7.00R16   | G/14  | 118/114K      | 5.50F        | 15.0             | 775      | 200                | 1320                   | 1180 | 770                      | 770  | TT   |
| 7.50R16LT | G/14  | 122/118K      | 6.00G        | 13.0             | 805      | 215                | 1500                   | 1320 | 770                      | 770  | TT   |
| 8.25R16LT | I/16  | 128/124K      | 6.50H        | 14.5             | 855      | 235                | 1800                   | 1600 | 770                      | 770  | TT   |
| 8.25R20   | I/16  | 139/137J      | 6.5          | 17.5             | 974      | 236                | 2430                   | 2300 | 930                      | 930  | TT   |
| 9.00R20   | I/16  | 144/142J      | 7.0          | 18.5             | 1030     | 250                | 2600                   | 2650 | 900                      | 900  | TT   |
| 10.00R20  | J/18  | 149/146J      | 7.5          | 19.0             | 1054     | 278                | 3250                   | 3000 | 930                      | 930  | TT   |
| 11.00R20  | J/18  | 152/149J      | 8.0          | 19.5             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20  | L/20  | 156/153J      | 8.5          | 20.5             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |
| 11R22.5   | H/16  | 146/145J      | 8.25         | 21.0             | 1054     | 279                | 3150                   | 2900 | 830                      | 830  | TL   |



## RU878

ALL-STEEL RADIAL TYRE



- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 12R22.5 | J/18  | 152/149L      | 9.00         | 21.5             | 1085     | 300                | 3550                   | 3250 | 930                      | 930  | TL   |



**RU899**  
ALL-STEEL RADIAL TYRE



- 1 Applicable for driving wheels, for short distance with low speed on mining and off roads
- 2 Pattern design offers excellent pulling force
- 3 Special tread compound offers excellent cut resistance
- 4 Reinforced bead design provides excellent load capacity

| Size     | L/R/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|--------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |        |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 10.00R20 | J/18   | 149/146F      | 7.5          | 24.0             | 1054     | 278                | 3250                   | 3000 | 930                      | 930  | TT   |
| 11.00R20 | J/18   | 152/149F      | 8.0          | 24.0             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20   | 156/153F      | 8.5          | 24.0             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



**RU699**  
ALL-STEEL RADIAL TYRE



- 1 Aggressive block design provides outstanding traction on rough roads
- 2 Suitable for all seasons and all position application on mud and sand terrain with some short on high-way use
- 3 Cool-running compound enhances toughness rating

| Size     | L/R/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|--------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |        |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 10.00R20 | J/18   | 149/146J      | 7.5          | 19.0             | 1054     | 278                | 3250                   | 3000 | 930                      | 930  | TT   |
| 11.00R20 | J/18   | 152/149J      | 8.0          | 19.5             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20   | 156/153J      | 8.5          | 20.5             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



**RU887**  
ALL-STEEL RADIAL TYRE



- 1 Applicable for drive axle on unsealed road
- 2 Robust tread block provides outstanding traction on sand and mud road
- 3 Special groove design with stone rejector prevent from stone penetration
- 4 Durable tyre carcass and improved tread compound help to resist chipping and chunking for longer tyre life

| Size     | L/R/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|--------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |        |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11.00R20 | J/18   | 152/149J      | 8.0          | 19.0             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20   | 156/153J      | 8.5          | 19.0             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



**RU888**  
ALL-STEEL RADIAL TYRE



- 1 Applicable for driving wheels, for short distance with low speed on mining and off roads
- 2 Pattern design offers excellent pulling force
- 3 Special tread compound offers excellent cut resistance
- 4 Reinforced bead design provides excellent load capacity

| Size     | L/R/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kpa) |      | Type |
|----------|--------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|          |        |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 11.00R20 | J/18   | 152/149F      | 8.0          | 23.0             | 1085     | 293                | 3550                   | 3250 | 930                      | 930  | TT   |
| 12.00R20 | L/20   | 156/153F      | 8.5          | 23.0             | 1125     | 315                | 4000                   | 3650 | 900                      | 900  | TT   |



## RUN866

ALL-STEEL RADIAL TYRE



Best Available

- 1 Application for all position on mixed highway and freeway
- 2 Special tread compound provides low heat ng-up, smooth wear&cut resistance, and low rolling resistance
- 3 Suitable for heavy duty truck and bus

| Size    | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kPa) |      | Type |
|---------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|         |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 12R22.5 | J/18  | 152/149L      | 9.00         | 16.5             | 1085     | 300                | 3550                   | 3250 | 930                      | 930  | TL   |



## RUN99

ALL-STEEL RADIAL TYRE



Best Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes slide sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long service life

| Size        | LR/PR | Service Index | Standard Rim | Tread Depth (mm) | O.D (mm) | Section Width (mm) | Max Load Capacity (kg) |      | Inflation Pressure (kPa) |      | Type |
|-------------|-------|---------------|--------------|------------------|----------|--------------------|------------------------|------|--------------------------|------|------|
|             |       |               |              |                  |          |                    | Single                 | Dual | Single                   | Dual |      |
| 295/80R22.5 | J/18  | 152/149M      | 9.00         | 15.0             | 1044     | 298                | 3550                   | 3250 | 900                      | 900  | TL   |
| 315/80R22.5 | L/20  | 158/159M      | 9.00         | 15.0             | 1076     | 312                | 4000                   | 3350 | 850                      | 850  | TL   |

### Replacement of Tube and Tubeless Tyres

| Tube Tyre | Tubeless Tyre (In Imperial) | Tubeless Tyre (In Metric) |
|-----------|-----------------------------|---------------------------|
| 9.00R20   | 10R22.5                     | 275/80R22.5               |
| 10.00R20  | 11R22.5                     | 295/80R22.5               |
| 11.00R20  | 12R22.5                     | 315/80R22.5               |
| 12.00R20  | 13R22.5                     |                           |

### Specifications Related

| Sizes       | O.D(mm) | Section Width(mm) | Load Index |
|-------------|---------|-------------------|------------|
| 9.00R20     | 1019    | 259               | 2800       |
| 10R22.5     | 1019    | 254               | 2800       |
| 275/80R22.5 | 1012    | 276               | 3075       |
| 10.00R20    | 1054    | 278               | 3000       |
| 11R22.5     | 1054    | 279               | 3000       |
| 295/80R22.5 | 1044    | 298               | 3350       |
| 11.00R20    | 1085    | 293               | 3550       |
| 12R22.5     | 1085    | 300               | 3550       |
| 315/80R22.5 | 1076    | 312               | 3750       |
| 12.00R20    | 1125    | 315               | 3750       |
| 13R22.5     | 1124    | 320               | 4000       |
| 315/80R22.5 | 1076    | 312               | 3750       |

### Comparitive table of Load Range and Ply Rate

| Load Range | Ply Rate | Load Range | Ply Rate |
|------------|----------|------------|----------|
| A          | 2        | G          | 14       |
| B          | 4        | H          | 16       |
| C          | 6        | J          | 18       |
| D          | 8        | L          | 20       |
| E          | 10       | M          | 22       |
| F          | 12       | N          | 24       |